642-457^{Q&As}

Implementing Cisco Unified Communications Manager, Part 2 v8.0
(CIPT2 v8.0)

Pass Cisco 642-457 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.pass4lead.com/642-457.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

Instant Download After Purchase

100% Money Back Guarantee

365 Days Free Update

800,000+ Satisfied Customers

QUESTION 1

Which statement is true regarding the configuration of SAF Forwarder?

A. In a multisite dial plan, SAF Forwarders may exist in multiple autonomous systems.

B. The client label that is configured in Cisco Unified Communications Manager must match the configuration on the SAF Forwarder router.

C. There should not be multiple nodes of Cisco Unified Communications Manager clusters acting as SAF clients.

D. The destination IP address must match the loopback address of the SAF router.
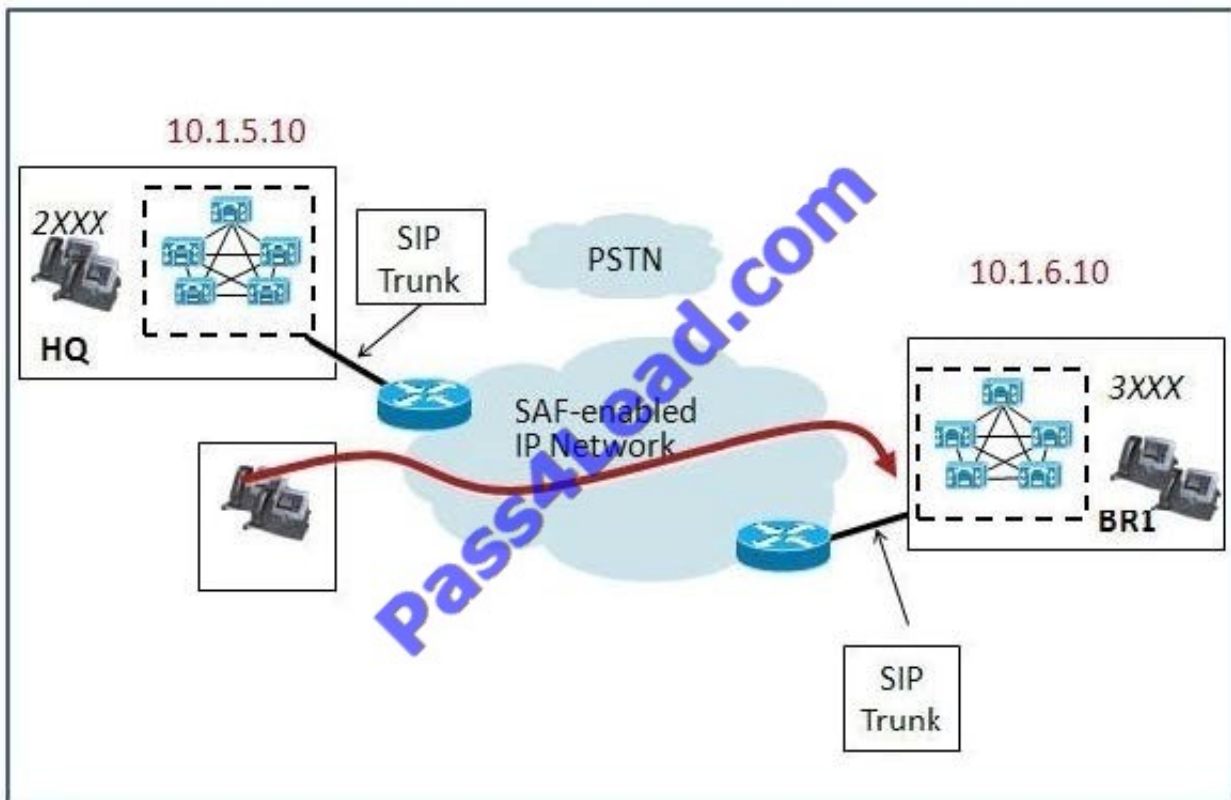
Correct Answer: A

QUESTION 2

When implementing a dial plan for multisite deployments, what must be present for SRST to work successfully?

A. dial peers that address all sites in the multisite cluster

B. translation patterns that apply to the local PSTN for each gateway

C. incoming and outgoing COR lists

D. configuration of the gateway as an MGCP gateway

Correct Answer: B

QUESTION 3

Refer to the exhibit.

What should the destination IP address be configured as on the HQ and BR1 SIP trunks?

A. The HQ SIP trunk destination IP address should be 10.1.6.10. The BR1 SIP trunk destination IP address should be 10.1.5.10.

B. The destination IP address is not configurable. Each cluster will learn about the remote trunk IP address through SAF learned routes.

C. The destination IP address will be learned automatically and configured on the SIP trunks after the Cisco Unified Communications Managers discover themselves.

D. The HQ SIP trunk destination IP address should be the HQ SAF Forwarder IP address. The BR1 SIP trunk destination IP address should be the BR1 SAF Forwarder IP address.

Correct Answer: B

QUESTION 4

When an H.323 trunk is added for Call Control Discovery, which statement is true?

A. The H.323 trunk is added by selecting Inter-Cluster Trunk (Non-Gatekeeper Controlled) and Device Protocol Inter-Cluster Trunk. The Enable SAF check box should be selected in the trunk configuration.

B. The H.323 trunk is added by selecting Inter-Cluster Trunk (Non-Gatekeeper Controlled) and Device Protocol Inter-Cluster Trunk. The Trunk Service Type should be Call Control Discovery.

C. The H.323 trunk is added by selecting Call Control Discovery Trunk and then selecting H.323 as the protocol to be

used.

D. The H.323 trunk is added by selecting H.323 Trunk, and selecting Inter-Cluster Trunk as the Device Protocol. The destination IP address field is configured as `SAF\\' to indicate that this trunk is used for SAF.

Correct Answer: A

QUESTION 5

Which device is needed to integrate H.320 into the Cisco video solution? (SourcE. Introducing IP Video Telephony)

A. video gateway

B. MGCP gateway

C. H.323 gatekeeper

D. MCU

Correct Answer: C

Latest 642-457 Dumps   642-457 Practice Test   642-457 Braindumps

To Read the Whole Q&As, please purchase the Complete Version from Our website.

Try our product !

100% Guaranteed Success
100% Money Back Guarantee
365 Days Free Update
Instant Download After Purchase
24x7 Customer Support
Average 99.9% Success Rate
More than 800,000 Satisfied Customers Worldwide
Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications. You can view Vendor list of All Certification Exams offered:

https://www.pass4lead.com/allproducts

Need Help

Please provide as much detail as possible so we can best assist you.
To update a previously submitted ticket: