

HP0-Y52^{Q&As}

Applying HP FlexNetwork Fundamentals

Pass HP HP0-Y52 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/hp0-y52.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



QUESTION 1

An HP Provision switch has port A1 connected to port g1/0/1 of an HP Comware switch. The ProVision port has the following configuration: `vlan 1 untag A1` `vlan 10 tag A1` `vlan 20 tag A1`


Which Comware configuration will allow the three VLANs to successfully pass traffic between the two switches?

- A. `interface g1/0/1 port link-type trunk port trunk permit vlan 1 10 20`
- B. `interface g1/0/1 port trunk encapsulation dot1q port trunk native vlan 1 port trunk permit vlan 1 10 20`
- C. `interface g1/0/1 port trunk port trunk permit auto-vlan`
- D. `interface g1/0/1 port trunk port trunk permit auto-vlan`

Correct Answer: A

QUESTION 2

Refer to the exhibit.

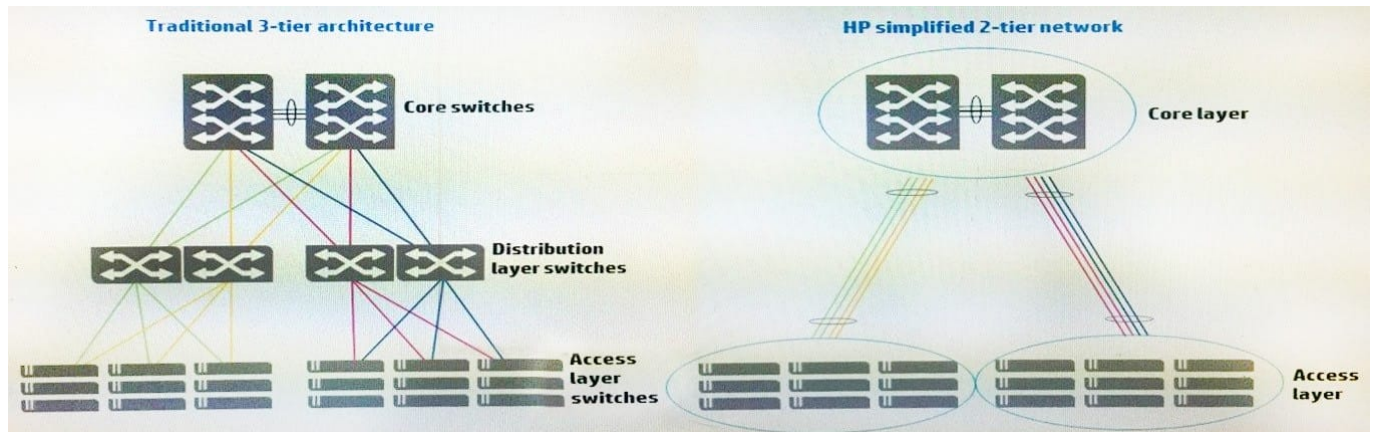

The topology shown on the left of the exhibit illustrates a traditional three-tier architecture. Which technology allows a company to simplify their network with a two-tier topology as illustrated on the right of the exhibit.

- A. Intelligent Resilient Framework
- B. Software-defined Networking
- C. Multiple Spanning Tree Protocol
- D. Equal Cost Multi-Pathing

Correct Answer: A

QUESTION 3

Which statement is true about wireless technologies?

- A. 802.11b/g uses an 802.11a-compatible frequency
- B. 802.11a has higher data rates than 802.11g does.
- C. 802.11n uses MIMO technology to improve throughput
- D. 802.11a uses the less crowded 2.4 GHz range

Correct Answer: C

QUESTION 4

What is one difference between Network Segment-based discovery and ARP-based discovery on HP Intelligent Management Center (IMC)?

- A. With Network Segment-based discovery, network device SNMP settings must match SNMP settings on IMC. With ARP-based discovery, only ARP settings must match.
- B. With Network Segment-based discovery, IMC can discover multiple devices. With ARP-based discovery, IMC can only discover one device; the administrator must re-run ARP-based discovery to discover a second device.
- C. With Network Segment-based discovery, the administrator enters a range of IP addresses to discover. With ARP-based discovery, the administrator enters one seed IP address, and IMC dynamically learns more IP addresses to discover.
- D. With Network Segment-based discovery, IMC can discover Layer 3 devices. With ARP-based discovery, IMC can discover only Layer 2 devices.

Correct Answer: C

QUESTION 5

A network administrator configures several HP Comware switches to be part of a single Intelligent Resilient Framework (IRF) virtual device. What is correct about the domain and member IDs in this configuration?

- A. The switches have different domain IDs and different member IDs.
- B. The switches have the same domain ID and the same member ID.
- C. The switches have the same domain ID and different member IDs.
- D. The switches have different domain IDs and the same member ID.

Correct Answer: C