

JN0-661^{Q&As}

Service Provider Routing and Switching

Pass Juniper JN0-661 Exam with 100% Guarantee

Free Download Real Questions & Answers PDF and VCE file from:

https://www.pass4lead.com/jn0-661.html

100% Passing Guarantee 100% Money Back Assurance


Following Questions and Answers are all new published by Juniper
Official Exam Center

- Instant Download After Purchase
- 100% Money Back Guarantee
- 365 Days Free Update
- 800,000+ Satisfied Customers



QUESTION 1

Click the Exhibit button

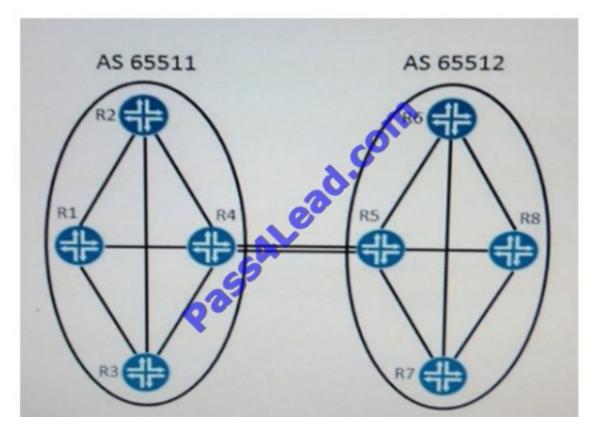

Both autonomous systems shown in the exhibit use BGP with a full-mesh IPGP configuration within each autonomous system and EBGP between the two autonomous systems. A single route is generated on R1 and advertised into BGP. Which two statements are true in this scenario? (Choose two.)

- A. R4 will not automatically readvertise the route to R5.
- B. R5 will automatically readvertise the route to other routers in AS 65512.
- C. R5 will not automatically readvertise the route to other routers in AS 65512.
- D. R4 will automatically readvertise the route to R5.

Correct Answer: CD

QUESTION 2

Refer to the exhibit.

https://www.pass4lead.com/jn0-661.html

2022 Latest pass4lead JN0-661 PDF and VCE dumps Download

user@PE1> show route receive-protocol bgp 193.168.1.2

inet.0: 37 destinations, 37 routes (37 active, 0 holddown, 0 hidden)

inet.3: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

vpn-A.inet.0: 7 destinations, 8 routes (7 active, 0 holddown, 0 hidden)

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)

user@PE1> show bgp summary

Groups: 2 Peers: 2 Down peers: 0

Table	Tot Paths	Act Path	s Suppressed	History Da	amp State	Pending	
inet6.0				70			
	(0	0	0	0	0	0
inet.0							
	(0	0	0	0	0	0
Peer		AS	InPkt	OutPkt	OutQ	Flaps Last	Up/Dwn
State #Active/Received/Accepted/Damped							
10.0.10.2	651	101	49	55	0	0	Establ
vpn-A.inet.0:	5/6/6/0						
193.168.1.2	655	512	15	16	0	0	Establ
inet.0: 0/0/0/0		712	15	10			Establ

You are implementing a Layer 3 VPN between Site 1 and Site 2. You notice that you are not sharing routes between PE1 and PE2. You have verified that MPLS and RSVP are functioning correctly. Referring to the exhibit, what is causing the problem?

- A. The multihop feature is not enabled.
- B. The next hop for the VPN routes is unusable.
- C. The Layer 3 VPN NLRI has not been enabled on PE1.
- D. The PE2 BGP session is restarting.

Correct Answer: C

QUESTION 3

Click the Exhibit button

```
[edit]
user@PE-1# show protocols
rsvp {
interface all;
}
mpls {
label-switched-path p1 {
from 1.1.1.1;
to 4.4.4.4;
no cspf;
interface all;
bgp {
group Int {
type Internal;
local-address 1.1.1.1;
family inet {
unicast,
family inet-vpn {
                   SAL
unicast;
neighbor 2.2.2.2;
neighbor 3.3.3.3;
neighbor 4.4.4.4;
ospf {
area 0.0.0.0 {
interface ge-0/0/2.0;
interf log.0;
[edit]
user@p-1# show protocols
mpls {
interface all;
ospf {
area 0.0.0.0 {
```

```
interface ge-0/0/1.0;
interface ge-0/0/2.0;
interface ge-1o0.0;
user@p-2# show protocols
mpls {
interface all;
}
ospf {
area 0.0.0.0
interface ge-0/0/1.0;
interface ge-0/0/2.0;
interface ge-lo0.0;
[edit]
user@n-2# show protocols
 user@p-2# show protocols
 rsvr {
 interface all;
 mpls {
 label-switched-path p2 {
from 4.4.4.4;
 to 1.1.1.1;
 no-ospf
                 14.000
 interface all;
 bap {
 group INT {
 type internal;
 local-address 4
 family inet {
 unicast;
 neighbor 22.2.2;
 neighbor 3.3.3.3;
 neighbor 1.1.1.1;
 area 0.0.0.0 {
 interface ge-0/0/2.0;
 interface 1o0;
 }
 }
```

https://www.pass4lead.com/jn0-661.html

2022 Latest pass4lead JN0-661 PDF and VCE dumps Download

Referring to the exhibit, you have configured an L3VPN that connects Site-1 and Site-2 together, but the BGP routes are being hidden on the PE routers. The topology in this scenario is shown below.

Site-1 > PE-1 > P-1 > P-2 > PE-2 > Site-2

Which two acttions would allow communication Site-1 and Site-2? (Choose two.)

- A. Disable CSPF on under MPLS on P-1 and P-2.
- B. Configure DGP on P-1 and P-2.
- C. Enable RSVP for all interfaces on P-1 and P-2.
- D. Enable LDP for all interfaces on all routers.

Correct Answer: CD

QUESTION 4

Which 0SPFv3 router ID is valid?

A. 192.168.1.1

B.:;192.168.1.1

C. 0.0.0.0

D. 2008:db800::1

Correct Answer: A

QUESTION 5

Click the Exhibit button Referring to the exhibit, you have configured an L3VPN that connects Site-1 and Site-2 together, but the BGP routes are not showing up on the PE routers. The topology in this scenario is shown below

```
user@PE-1# show protocols
rsvp {
interface all;
mpls {
label-switched-path p1 {
from 1.1.1.1;
to 4.4.4.4;
no-cspf;
interface all;
bgp {
group Int {
type internal;
local-address 1.1.1.1;
family inet {
unicast,
family inet-vpn {
unicast;
 neignbor 4.4.4.4,
 ospf {
 area 0.0.0.0 {
interface ge-0/0/2.0;
interface lo0.0;
 [edit]
 user@PE-1# show routing-instances CE-1
user@PC-1# show routing-instal
instance-type vff,
interface ge-0/0/1.0;
route-destinguisher 65305:395;
vrf-target target 65412:100;
routing-options {
static {
 route 100.100.100.0/24 next-hop
 192.168.1.100;
[edit] user@P-1# show protocols
 rsvp {
 interface all;
 mpls (
 interface all;
 ospf {
 area 0.0.0.0 {
interface ge-0/0/1 0;
interface
interface
[edit]
user@PE-2# show protocols
rsvp {
interface all;
mpls {
label-switched-path p2 {
from 4.4.4.4;
to 1.1.1.1;
no-cspf;
interface all,
bgp {
group Int {
type internal;
local address 4.4.4.4;
```

https://www.pass4lead.com/jn0-661.html 2022 Latest pass4lead JN0-661 PDF and VCE dumps Download

```
family inet {
unicast:
family inet-vpn {
unicast:
neighbor 2.2.2.2;
                Lead.com
neighbor 3.3.3.3;
neighbor 1.1.1.1;
ospf {
area 0.0.0.0 {
interface ge-0/0/2.0;
interface lo0.0;
[edit]
user@PE2# show routing-instances CE-2
instance type vrf;
interfcae ge-0/0/1.0;
route distinguisher 65305:395;
vrf-target target:64512 : 100:
routing-options {
static {
route 200.200.200.0/24 next-hop
10.1.1.100;
```

Site-1>PE-1>P-1>P-2>PE-2> Site-2

Which action should you take to allow communication between Site-1 and Site-2?

- A. Enable LDP for all interfaces on all routes,
- B. Change the route distinguisher to be different on PE-1 and PE-2
- C. Change the route target to match on PE-1 and PE-2
- D. Configure BGP on P-1 and P-2.

Correct Answer: A

Latest JN0-661 Dumps

JN0-661 Practice Test

JN0-661 Study Guide



To Read the Whole Q&As, please purchase the Complete Version from Our website.

Try our product!

100% Guaranteed Success

100% Money Back Guarantee

365 Days Free Update

Instant Download After Purchase

24x7 Customer Support

Average 99.9% Success Rate

More than 800,000 Satisfied Customers Worldwide

Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications. You can view Vendor list of All Certification Exams offered:

https://www.pass4lead.com/allproducts

Need Help

Please provide as much detail as possible so we can best assist you. To update a previously submitted ticket:





Any charges made through this site will appear as Global Simulators Limited.

All trademarks are the property of their respective owners.

Copyright © pass4lead, All Rights Reserved.