

300-420^{Q&As}

Designing Cisco Enterprise Networks (ENSLD)

Pass Cisco 300-420 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/300-420.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

An architect is designing a network that will utilize the spanning tree protocol to ensure a loop-free topology. The network will support an engineering environment where it is necessary for end users to connect their own network switches for testing purposes. Which feature should the architect include in the design to ensure the spanning tree topology is not affected by these rogue switches?

- A. BPDU Skew Detection
- B. BPDU guard
- C. loop guard
- D. root guard

Correct Answer: D

QUESTION 2

The customer solution requires QoS to support streaming multimedia over a WAN. An architect chooses to use Per-Hop Behavior. Which solution should the engineer use to classify and mark traffic traveling between branch sites?

- A. CBWFQ with DSCP AF2
- B. LLQ with DSCP EF
- C. CBWFQ with DSCP AF3
- D. LLQ with DSCP AF4

Correct Answer: C

QUESTION 3

Which type of rendezvous point deployment is standards-based and support dynamic RP discovery?

- A. Auto-RP
- B. Anycast-RP
- C. bootstrap router
- D. static RP

Correct Answer: C

QUESTION 4


Which two functions are provided by the Cisco SD-WAN orchestration plane? (Choose two.)

- A. centralized provisioning
- B. primary authentication point
- C. NAT traversal facilitation
- D. Zero Touch Provisioning
- E. troubleshooting and monitoring

Correct Answer: BC

QUESTION 5

Refer to the exhibit. An architect is designing a BGP solution to connect a remote branch to a service provider. There are several prefixes within the branch that the company does not want to be advertised to the internet. Which solution should the architect use to accomplish this?

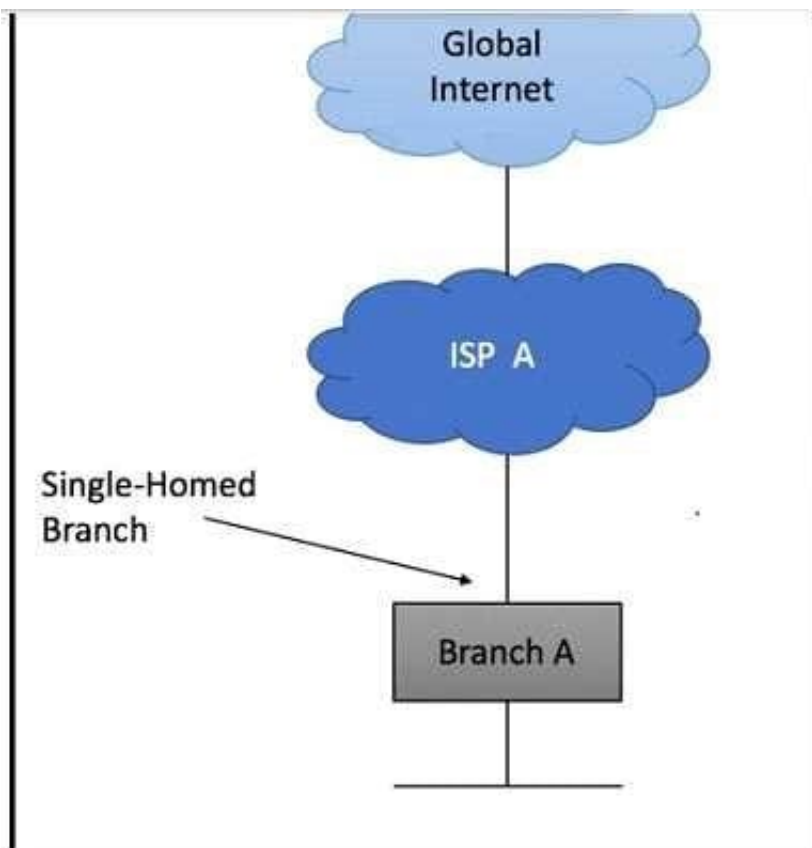

- A. Set the BGP Internet community for all prefixes.
- B. Implement the NOPEER community.
- C. Use the BGP No-Advertise community for the prefixes to exclude.
- D. Attach the No-Export community with the prefixes to exclude

Correct Answer: D

[300-420 PDF Dumps](#)

[300-420 VCE Dumps](#)

[300-420 Braindumps](#)