

# 4A0-101<sup>Q&As</sup>

Alcatel-Lucent Interior Routing Protocols and High Availability

## Pass Alcatel-Lucent 4A0-101 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/4a0-101.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Alcatel-Lucent Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



**QUESTION 1**


Which OSPFv3 LSA advertises the location of an ASBR?

- A. Intra-Area Prefix LSA
- B. Inter-Area Prefix LSA
- C. Inter-Area Router LSA
- D. AS External LSA

Correct Answer: C

**QUESTION 2**

Click on the exhibit.

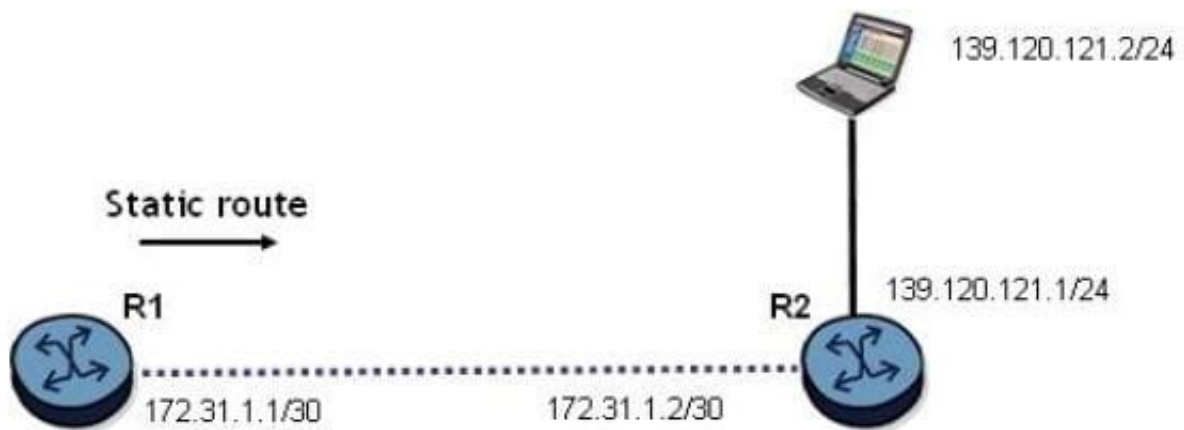

```
*R01>config>router# static-route 139.120.121.0/24 next-hop 172.31.1.1
*R01>config>router# ping 139.120.121.2 source 172.31.1.1
PING 139.120.121.2 56 data bytes
No route to destination. Address: 139.120.121.2, Router: Base
No route to destination. Address: 139.120.121.2, Router: Base
No route to destination. Address: 139.120.121.2, Router: Base
No route to destination. Address: 139.120.121.2, Router: Base
No route to destination. Address: 139.120.121.2, Router: Base

---- 139.120.121.2 PING Statistics ----
5 packets transmitted, 0 packets received, 100% packet loss
```

A static route has been configured on router R1 to reach the PC at 139.120.121.2. What might be causing the ping to fail?

- A. Router R2 needs a static route to the PC.
- B. Router R2 needs a default to router R1.

- C. Router R1 needs a default route to router R2.
- D. The static route should use a next-hop of 172.31.1.2

Correct Answer: D

---

### QUESTION 3

In which of the following types of areas does an OSPF router not set the E bit in its Type 1 LSA?

- A. Not so stubby area
- B. Stub area
- C. Backbone area
- D. Normal area

Correct Answer: B

---

### QUESTION 4

Which function or component of the Alcatel-Lucent 7750 SR is in charge of supporting dynamic routing protocols and constructing the routing table?

- A. IOM
- B. CPM
- C. FIB
- D. SPF

Correct Answer: B

---

### QUESTION 5

Click on the exhibit.

R6# show router ospf database

=====

OSPF Link State Database (Type : All)

=====

Type	Area Id	Link State Id	Adv Rtr Id	Age	Sequence	Cksum
Router	0.0.0.0	10.10.10.2	10.10.10.2	2	0x8000000c	0xb616
Router	0.0.0.0	10.10.10.3	10.10.10.3	473	0x80000005	0xbedd
Router	0.0.0.0	10.10.10.4	10.10.10.4	5	0x80000006	0xd789
Router	0.0.0.0	10.10.10.6	10.10.10.6	476	0x80000005	0x233a
Network	0.0.0.0	10.2.4.4	10.10.10.4	4	0x80000001	0x28b9
Network	0.0.0.0	1.1.1.6	10.10.10.6	472	0x80000002	0xdce5
AS Ext	n/a	192.168.1.0	10.10.10.4	36	0x80000001	0x271e
AS Ext	n/a	192.168.2.0	10.10.10.4	36	0x80000001	0x1c28

-----

No. of LSAs: 8

=====

Given the output shown, which router is the ASBR in this network?

- A. 10.10.10.2
- B. 10.10.10.3
- C. 10.10.10.4
- D. 10.10.10.6
- E. There is no ASBR configured in the network.

Correct Answer: C

[4A0-101 PDF Dumps](#)

[4A0-101 Practice Test](#)

[4A0-101 Exam Questions](#)