

# 4A0-C01<sup>Q&As</sup>

Nokia NRS II Composite Exam

**Pass Nokia 4A0-C01 Exam with 100% Guarantee**

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/4a0-c01.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Nokia  
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



**QUESTION 1**

Which of the following about LDP-over-RSVP is TRUE?

- A. RSVP LSPs must exist between each PE-ABR pair, or ABR-ABR pair in each area.
- B. When LDP-over-RSVP is active, the LDP prefixes are resolved to a physical egress interface.
- C. Targeted sessions must exist between all routers along the tunnel path.
- D. Link LDP sessions must exist between each ABR-ABR pair in each area.

Correct Answer: A

---

**QUESTION 2**

Which of the following fields does NOT appear in the MPLS label header?

- A. Label
- B. Frame check sequence
- C. Traffic Class (previously called Experimental)
- D. Time To live
- E. Bottom of stack bit

Correct Answer: B

---

**QUESTION 3**

Which of the following about VPRN route targets is FALSE?


- A. They are used to identify the VRF table for a prefix at the receiving PE.
- B. They are used by VPRNs to control the distribution of VPN routing information.
- C. They are distributed to all PEs and CEs that are part of the VPRN.
- D. They are distributed to PEs to identify the VRF table that a VPN-IPv4 prefix is associated with.

Correct Answer: C

---

**QUESTION 4**

Click the exhibit button.

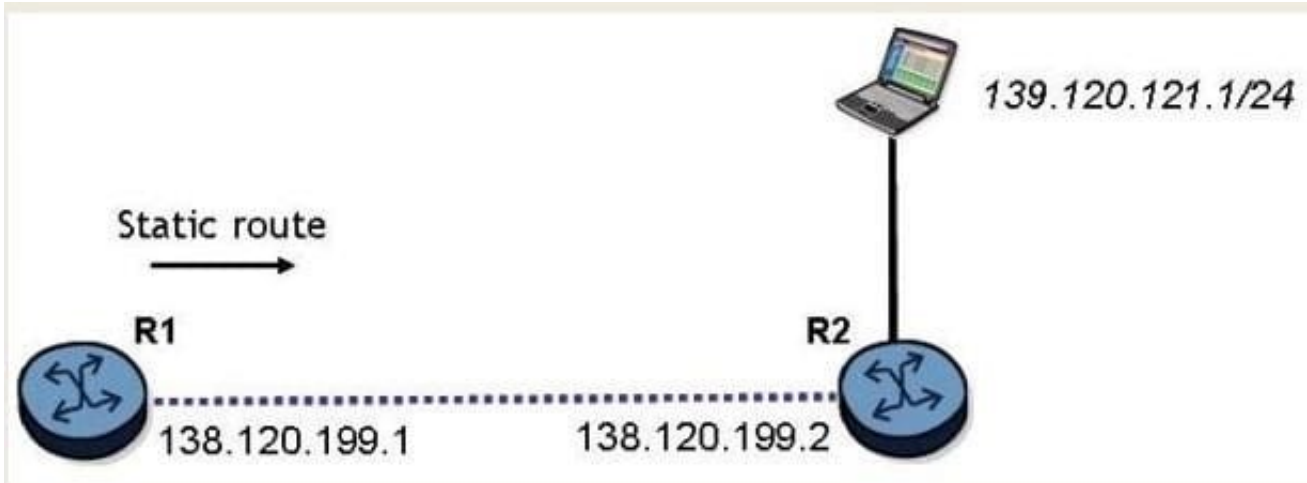

What is the command to configure a static route on the 7750 service router R1 to reach the network behind router R2?

- A. configure router static-route 139.120.121.0/24 next-hop 138.120.199.2
- B. configure router static-route 139.120.121.0/24 next-hop 138.120.199.1
- C. configure router static-route 138.120.199.2/24 next-hop 138.120.199.1
- D. configure router static-route 139.120.121.0/24 next-hop 139.120.121.2

Correct Answer: A

#### QUESTION 5

Which of the following commands may only be used on the head end router to verify the status of an LSP named "LSP 1"? (Choose two)

- A. show router mpls lsp "LSP 1" originate
- B. show router mpls lsp "LSP 1" path detail
- C. show router rsvp session originate
- D. show router rsvp session "LSP 1"

Correct Answer: BC

[4A0-C01 PDF Dumps](#)

[4A0-C01 VCE Dumps](#)

[4A0-C01 Study Guide](#)