

500-220^{Q&As}

Cisco Meraki Solutions Specialist

Pass Cisco 500-220 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/500-220.html>


100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



QUESTION 1

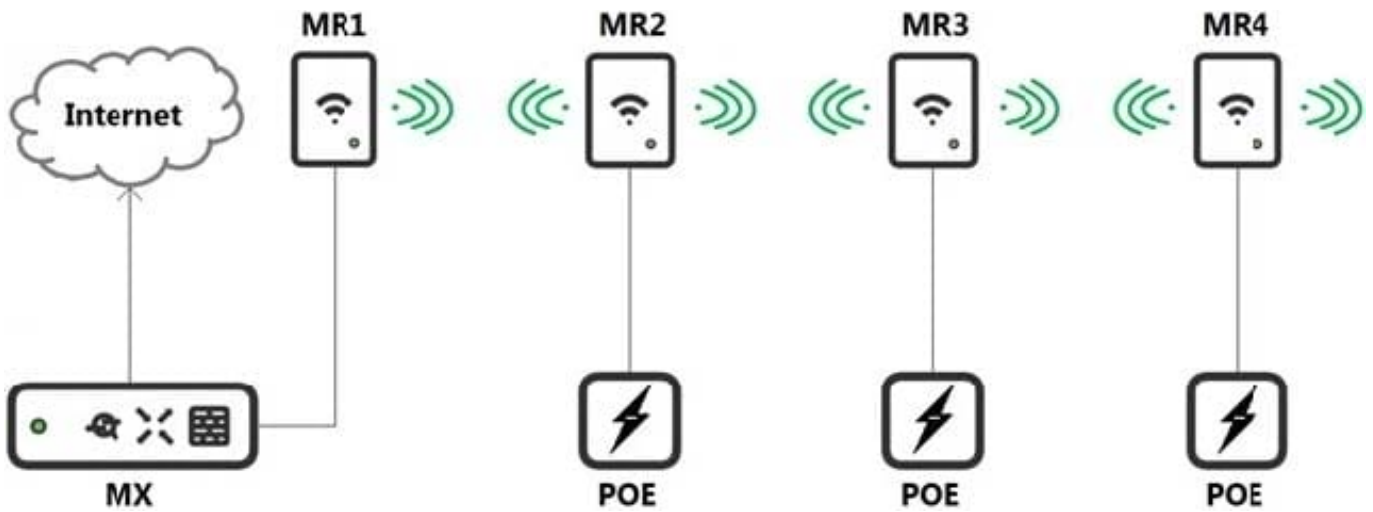

Refer to the exhibit. Which design recommendation should be considered?

- A. A 25-percent throughput loss occurs for every hop. Cisco Meraki best practice recommends a 1-hop maximum.
- B. A 25-percent throughput loss occurs for every hop. Cisco Meraki best practice recommends a 2-hop maximum.
- C. A 50-percent throughput loss occurs for every hop. Cisco Meraki best practice recommends a 1-hop maximum.
- D. A 50-percent throughput loss occurs for every hop. Cisco Meraki best practice recommends a 2-hop maximum.

Correct Answer: C

QUESTION 2

Security Center the last 2 weeks ▾

Search events Filter 158 matching events

Summary **Events**

Time	Type	Source	Destination	Disposition	Action	Details
May 30 21:22:50	IDS Alert	Desktop [redacted]:10	a104-96-113-137 deploy.static.akamaitech nologies.com	Blocked	MALWARE-CNC	Win.Trojan.Cridex variant outbound connection
May 30 21:22:46	IDS Alert	Desktop [redacted]:10	a104-96-113-137 deploy.static.akamaitech nologies.com	Blocked	MALWARE-CNC	Win.Trojan.Cridex variant outbound connection
May 30 21:22:46	IDS Alert	Desktop [redacted]:10	a104-96-113-137 deploy.static.akamaitech nologies.com	Blocked	MALWARE-CNC	Win.Trojan.Cridex variant outbound connection
May 30 21:22:46	IDS Alert	Desktop [redacted]:10	a104-96-113-137 deploy.static.akamaitech nologies.com	Blocked	MALWARE-CNC	Win.Trojan.Cridex variant outbound connection

MALWARE-CNC Win.Trojan.Cridex variant outbound connection

Rule ID: 1-31772

Whitelist: On Off

Links: www.virustotal.com

Actions: Rule details, Inspect picklist, Show this signature only

Refer to the exhibit. Which IDS/IPS mode is the MX Security Appliance configured for?

- A. quarantine

- B. prevention
- C. detection
- D. blocking

Correct Answer: B

QUESTION 3

Which VLAN is used to source pings across the site-to-site VPN when using the MX Live tools?

- A. highest VLAN ID that is configured and set to NO to use VPN
- B. lowest VLAN ID that is configured and set to YES to use VPN
- C. highest VLAN ID that is configured and set to YES to use VPN
- D. lowest VLAN ID configured and set to NO to use VPN

Correct Answer: C

Reference:

https://documentation.meraki.com/General_Administration/Tools_and_Troubleshooting/Using_the_Ping_Live_Tool

QUESTION 4

Where should a network admin navigate to investigate wireless mesh information between Meraki APs?

- A. Wireless > Monitor > Access Points > AP > RF
- B. Wireless > Configure > Radio Settings
- C. Wireless > Monitor > Wireless Health
- D. Wireless > Monitor > RF Spectrum

Correct Answer: A

QUESTION 5

When wireless SSIDs are configured in Dashboard, which setting on the Access Control page affects the ability of a 2.4 GHz only client device from associating to the WLAN for the first time?

- A. Content filtering
- B. Bridge mode
- C. 802.11r
- D. Dual band operating with Band Steering

Correct Answer: D

[500-220 Practice Test](#)

[500-220 Exam Questions](#)

[500-220 Braindumps](#)