![Pass2Lead logo](https://www.pass2lead.com)
DES-1121^{Q&As}

Specialist - Implementation Engineer PowerMax and VMAX Family Solutions Version 1.0

Pass EMC DES-1121 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.pass2lead.com/des-1121.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by EMC Official Exam Center

⚙ **Instant Download** After Purchase

⚙ **100% Money Back** Guarantee

⚙ **365 Days** Free Update

⚙ **800,000+** Satisfied Customers

![Pass2Lead logo](https://Pass2Lead.com)
QUESTION 1

What is the maximum number of systems controlled by Unisphere 360?

A. 64

B. 100

C. 128

D. 200

Correct Answer: D

QUESTION 2

A systems administrator plans to use Non-Disruptive Migration (NDM) to migrate data from a VMAX array running Enginuity 5876 to a PowerMax running PowerMaxOS 5978 Which NDM mode will be used?

A. Metro-based

B. Adaptive Copy

C. Asynchronous

D. Pass-through

Correct Answer: A

https://www.delltechnologies.com/asset/en-us/products/storage/technical- support/h17133-non-disruptive-migration-best-practices-and-operational-guide.pdf

QUESTION 3

A systems administrator is performing a configuration change on a PowerMax array. Where does the configuration manager perform the change?

A. Host which performs the change

B. MMCS

C. Disk drives

D. SYMAPI

Correct Answer: B

QUESTION 4

![Pass2Lead logo](https://Pass2Lead.com)
DRAG DROP

An RDF group on a VMAX3 array is being replicated in SRDF/A mode to a remote VMAX3 array To accommodate application growth a new R1 device needs to be added to the RDF group SRDF/A consistency of the existing devices in the
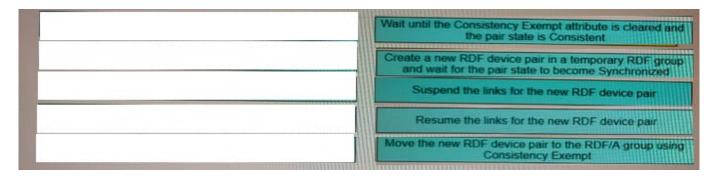
RDF group should be maintained when the new device is added.

What is the correct sequence of steps for adding the new R1 device and making it available for application use?

Select and Place:

Suspend the links for the new RDF device pair	STEP 1
Wait until the Consistency Exempt attribute is cleared and the pair state is Consistent	STEP 2
Create a new RDF device pair in a temporary RDF group and wait for the pair state to become Synchronized	STEP 3
Move the new RDF device pair to the RDF/A group using Consistency Exempt	STEP 4
Resume the links for the new RDF device pair	STEP 5

Correct Answer:

	Wait until the Consistency Exempt attribute is cleared and the pair state is Consistent
	Create a new RDF device pair in a temporary RDF group and wait for the pair state to become Synchronized
	Suspend the links for the new RDF device pair
	Resume the links for the new RDF device pair
	Move the new RDF device pair to the RDF/A group using Consistency Exempt

QUESTION 5

An administrator is managing two PowerMax arrays that are located in two different data centers. The data centers are 550 km apart and are connected by a high bandwidth network link. The administrator wants to replicate data between the two arrays and achieve the lowest RPO

When using SRDF. which mode meets this requirement?

A. Asynchronous

B. Adaptive Copy

C. Metro

D. Synchronous

Correct Answer: C