

# E20-807<sup>Q&As</sup>

Expert - VMAX All Flash and VMAX3 Exam

# Pass EMC E20-807 Exam with 100% Guarantee

Free Download Real Questions & Answers PDF and VCE file from:

https://www.pass2lead.com/e20-807.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by EMC
Official Exam Center

- Instant Download After Purchase
- 100% Money Back Guarantee
- 365 Days Free Update
- 800,000+ Satisfied Customers






### **QUESTION 1**

Refer to the Exhibit.

# Workload

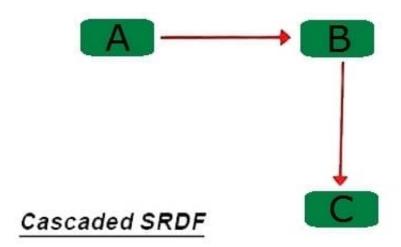

Cascaded SRDF has been deployed on VMAX3 has been deployed on VMAX3 arrays. The SRDF mode has been set to Asynchronous between Sites A and B.

Which SRDF mode is permitted between Sites B and C?


- A. Adaptive Copy Write Pending
- B. Synchronous
- C. Adaptive Copy Disk
- D. Asynchronous

Correct Answer: C

## **QUESTION 2**

Refer to the exhibit.



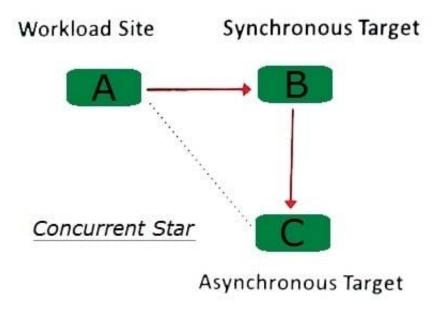

Which failure scenario requires a reconfiguration of this Concurrent SRDF/Star configuration?

- A. Link failure between Sites A and C
- B. Link failure between Sited A and B
- C. Site A failure
- D. Site B failure

Correct Answer: D

#### **QUESTION 3**

When FAST.X is used to access five VNX arrays from a single VMAX3, what is the minimum number of DX ports required?

- A. 4
- B. 10
- C. 20
- D. 40

Correct Answer: C

DX directors are configured in dual initiator (DI) pairs like traditional DAs. They are fully redundant like DAs and, when necessary, a failing director fails over to the other, fully functioning director in the DI pair. EMC requires a minimum of four paths to external devices. This means that at least four ports belonging to a single DX dual-initiator pair must be configured.



## https://www.pass2lead.com/e20-807.html

2024 Latest pass2lead E20-807 PDF and VCE dumps Download

#### **QUESTION 4**

Which SYMCLI command can be used to confirm that eDisk have been created when using FAST.X?

A. symcfg

B. symdisk

C. symaccess

D. symsan

Correct Answer: B

#### **QUESTION 5**

SRDF/Metro has been deployed. What is the state and external identity of the R2 devices after initial synchronization has completed?

A. State: Read/Write Identity: R1 Identity

B. State: Read/Write Identity: Original Identity

C. State: Write Disabled Identity: Original Identity

D. State: Write Disabled Identity: R1 Identity

Correct Answer: A

Reference: https://www.emc.com/collateral/technical-documentation/h14556-vmax3-srdf-metro-overview-and-best-practices-tech-note.pdf?isKoreaPage=falseanddomainUrlForCanonical=https%3A%2F%2Fwww.emc.com (page 9)

E20-807 Practice Test E20-807 Exam Questions E20-807 Braindumps