

H12-721^{Q&As}

HCIP-Security-CISN V3.0

Pass Huawei H12-721 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/h12-721.html>

100% Passing Guarantee
100% Money Back Assurance


Following Questions and Answers are all new published by Huawei
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

As shown in Figure, firewall is in stateful failover networking environment, the firewall interfaces are in the business routing mode, and up and down are the router with OSPF configured.

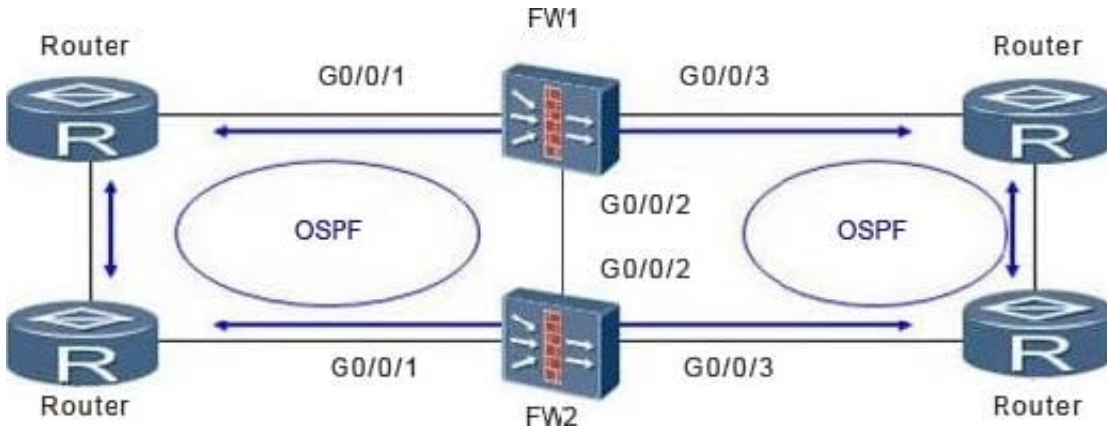

Assuming the OSPF protocol convergence Recovery time is 30s, following best configuration management is to seize on the HRP?

- A. hrp preempt delay 20
- B. hrp preempt delay 40
- C. hrp preempt delay 30
- D. undo hrp preempt delay

Correct Answer: B

QUESTION 2

About VRRP packets, which of the following statements is correct? (Choose two answers)

- A. VRRP packets using TCP
- B. VRRP packets using UDP
- C. VRRP packet destination address is 224.0.0.18
- D. VRRP packet TTL value is 255

Correct Answer: CD

QUESTION 3

With regard to the Radius protocol, which of the following statements are correct (choose three answers)

- A. Use the UDP protocol to transmit packets Radius

- B. authentication and authorization port number can be 1812
- C. To account for encryption processing using the Radius protocol to transmit user account and password
- D. authentication and authorization port number can be 1645

Correct Answer: ABD

QUESTION 4


The USG series product dual-system hot backup does not involve the _____ protocol.

- A. HRP
- B. VRRP
- C. VGMP
- D. IGMP

Correct Answer: D

QUESTION 5

As shown in Figure, firewall is in stateful failover networking environment. Which of the following command enables the device to automatically adjust VGMP management priority, and automatic standby switch?

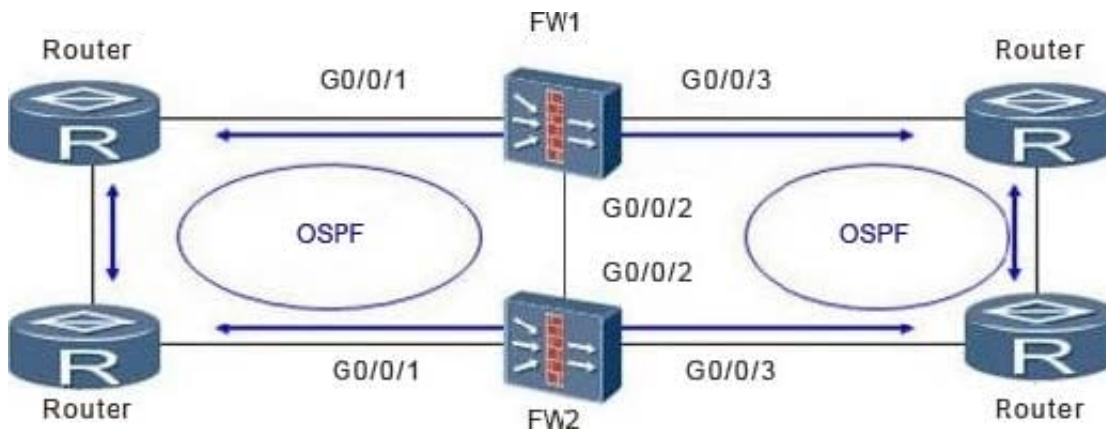

- A. `hrp ospf-cost adjust-enable`
- B. `hrp preempt delay 60`
- C. `hrp interface GigabitEthernet 0/0/2`
- D. `hrp auto-sync config`

Correct Answer: A

[H12-721 VCE Dumps](#)

[H12-721 Practice Test](#)

[H12-721 Braindumps](#)