

# HP2-Z34<sup>Q&As</sup>

Building HP FlexFabric Data Centers

## Pass HP HP2-Z34 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/hp2-z34.html>

100% Passing Guarantee  
100% Money Back Assurance


Following Questions and Answers are all new published by HP Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



**QUESTION 1**

Refer to the exhibit An administrator is creating the EVI network shown in the exhibit Switches 1 and 2 are configured as ENDP servers. and Switch 3 is configured as an ENDP client to the ENDP servers. Which configuration is correct for the EVI tunnel interface on Switch 3?

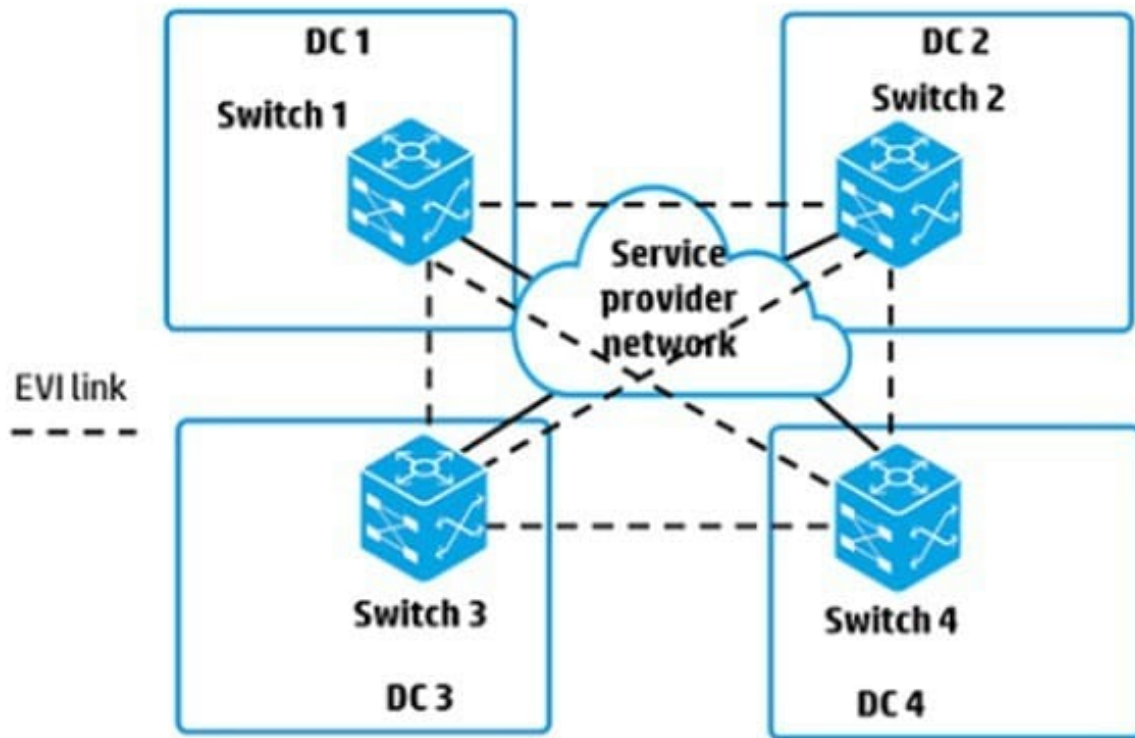

- A. The source IP address is the switch router ID; the addresses for switches 1, 2, and 4 need to be set as destinations
- B. The source IP address is the address on the connection to the service provider; no other destination IP addresses need to be set.
- C. The source IP address is the address on the connection to the service provider; the addresses for switches 1, 2, and 4 need to be set as destinations
- D. The source IP address is the switch router ID; no other destination IP addresses need to be set.

Correct Answer: C

**QUESTION 2**

An administrator configures an HP Comware switch to support FCoE in Fibre Channel Forwarder (FCF) mode A switch interface connects to a server FC host bus adapter (HBA). What is the correct configuration for this port?

- A. bound to a VFC interface, which is in F mode
- B. bound to a VFC interface, which is in E mode

- C. FC port >n F mode
- D. FC port in NP mode

Correct Answer: B

---

### QUESTION 3

An administrator is configuring an HP switch to run SPBM. Which Spanning Tree Protocol (STP) configuration is required?

- A. Disable STP.
- B. Ensure that the switch with the lowest IS-IS router ID has the lowest bridge priority.
- C. Set the spanning tree mode to ECT.
- D. Map all B-VLANs to MSTP instance 4092

Correct Answer: D

---

### QUESTION 4

An HP Comware switch port is being connected to a server Converged Network Adaptor (CNA). The CNA and the switch port need to communicate about parameters for various priority flow control (PFC) and bandwidth control mechanisms. How does the administrator enable these communications?

- A. Enable PFC globally and then enable PFC on the switch port
- B. Enable the Fibre Channel (FC) fabric port function on the switch port and then set the port as an F-port.
- C. Enable Ethernet Virtual Bridging (EVB) on the switch port.
- D. Enable LLDP globally and then enable Data Center Bridging eXchange (DCBX) TLVs on the switch port

Correct Answer: D

---

### QUESTION 5

What must be used when implementing the backbone multicast feature to isolate multicasts in the SPBM region?

- A. maximum of two Equal Cost Tree (ECT) algorithms
- B. single I-SID for all VLANs belonging to the same customer
- C. head-end replication for multicasts
- D. odd-numbered VLAN IDs for B-VLANs

Correct Answer: C

---

[HP2-Z34 PDF Dumps](#)

[HP2-Z34 VCE Dumps](#)

[HP2-Z34 Exam Questions](#)