

JN0-450^{Q&As}

Mist AI Specialist (JNCIS-MistAI)

Pass Juniper JN0-450 Exam with 100% Guarantee

Free Download Real Questions & Answers PDF and VCE file from:

https://www.pass2lead.com/jn0-450.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

- Instant Download After Purchase
- 100% Money Back Guarantee
- 365 Days Free Update
- 800,000+ Satisfied Customers





QUESTION 1


How should Mist AP43 access points be mounted for location-based services?

- A. table mounted (logo face up)
- B. horizontal (logo face down)
- C. vertical (wall mounted)
- D. above the ceiling tile (logo face up)

Correct Answer: B

Reference: https://www.mist.com/documentation/adding-ap-location/

QUESTION 2

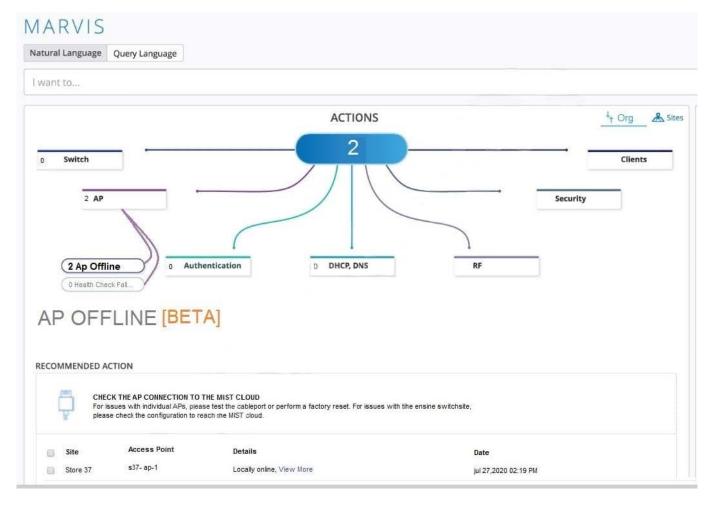

Referring to the exhibit, which two statements are correct? (Choose two.)

A. The AP is able to reach the Mist cloud.

https://www.pass2lead.com/jn0-450.html

2024 Latest pass2lead JN0-450 PDF and VCE dumps Download

- B. The AP is not able to reach the Mist cloud.
- C. The AP\\'s radios are not broadcasting SSIDs.
- D. The AP\\'s radios are broadcasting SSIDs.

Correct Answer: B

QUESTION 3

Referring to the exhibit, what happens to all client traffic?

Isolation

prohibit peer to peer communication

Filtering (Wired to Wireless)

- ARP
- Broadcast/Multicast
 - Allow mDNS

DTIM Period

DTIM period 2

- A. All broadcasts and multicast packets would be blocked on a specified interface except ARPs, including DHCP broadcast transactions, and IPv6 neighbor discovery frames (ICMPv6).
- B. All broadcasts and multicast packets would be blocked on a specified interface, including IPv6 neighbor discovery frames (ICMPv6), except ARP and DHCP broadcasts.
- C. Broadcasts would be blocked, the AP would proxy ARP for the subnet, and Apple devices will not discover each other using Bonjour.



https://www.pass2lead.com/jn0-450.html

2024 Latest pass2lead JN0-450 PDF and VCE dumps Download

D. All broadcasts will be sent and the AP would proxy ARP for the subnet.

Correct Answer: C

Reference: https://www.mist.com/documentation/isolation/

QUESTION 4

Which two statements are correct when determining AP placement in the Mist UI? (Choose two.)

- A. The AP height must be recorded correctly.
- B. Use vBeacons to simulate user locations while verifying network coverage.
- C. The floor plan map size should be properly scaled.
- D. You must ensure that the floor plan map is oriented to face true north.

Correct Answer: AC

Reference: https://www.mist.com/documentation/good-location-setup/

QUESTION 5

You need to deploy an external, directional patch-panel antenna to provide coverage in a specific area. You plan to use a Mist AP43, which has a 4-stream 5 GHz radio, a 4-stream 2.4 GHz radio, and a dual-band 2-stream radio for monitoring. In this scenario, how many dual-band connectors should the antenna have?

- A. 4 connectors
- B. 10 connectors
- C. 6 connectors
- D. 3 connectors

Correct Answer: C

Reference: https://www.mist.com/resources/ap43-access-point/

JN0-450 PDF Dumps

JN0-450 VCE Dumps

JN0-450 Exam Questions