

JN0-635^{Q&As}

Security, Professional

Pass Juniper JN0-635 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/jn0-635.html>

100% Passing Guarantee
100% Money Back Assurance


Following Questions and Answers are all new published by Juniper
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



QUESTION 1

Exhibit.

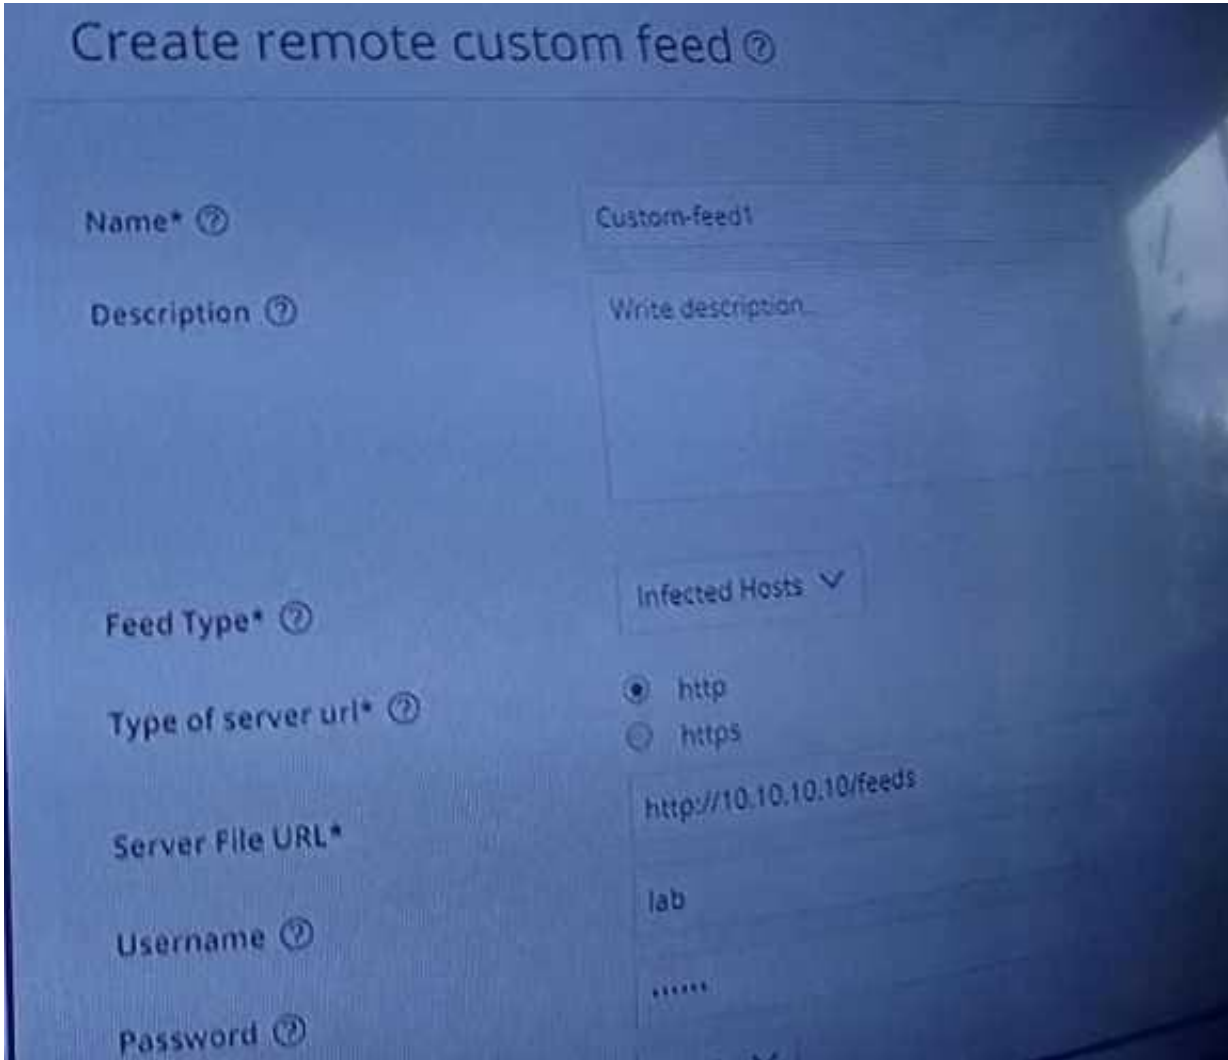

Referring to the exhibit, which two statements are true? (Choose two.)

- A. Juniper Networks will not investigate false positives generated by this custom feed.
- B. The custom infected hosts feed will not overwrite the Sky ATP infected host's feed.
- C. The custom infected hosts feed will overwrite the Sky ATP infected host's feed.
- D. Juniper Networks will investigate false positives generated by this custom feed.

Correct Answer: AC

Reference: https://www.juniper.net/documentation/en_US/junos-space18.1/policy-enforcer/topics/task/configuration/junos-space-policyenforcer-custom-feeds-infected-host-configure.html

QUESTION 2

Which two VPN features are supported with CoS-based IPsec VPNs? (Choose two.)

- A. IKEv2
- B. VPN monitoring
- C. dead peer detection
- D. IKEv1

Correct Answer: AC

Reference: https://www.juniper.net/documentation/en_US/junos/topics/topic-map/securiry-cos-basedipsec-vpns.html

QUESTION 3

Malware that is detonated by the JATP sandbox must be able to communicate with the Internet without being able to harm your local network resources.

Which statement is correct in this scenario?

- A. The management interface must be connected to the Internet zone
- B. The exhaust interface must be connected to the Internet zone
- C. The honeypot interface must be connected to the Internet zone
- D. The monitoring interface must be connected to the Internet zone

Correct Answer: A

Reference: https://www.juniper.net/documentation/en_US/release-independent/jatp/topics/topic-map/jatpgetting-started.html

QUESTION 4

Click the Exhibit button.

```
user@SRX5800> show security idp status
```

```
-----  
State of IDP: Default, Up since: 2019-11-02 09:58:29 EDT (1w5d 03:44 ago)
```

```
Packets/second: 1           Peak: 441 @ 2019-11-14 11:02:54 EST  
KBits/second : 35881       Peak: 285133 @ 2019-11-14 12:43:05 EST  
Latency (microseconds): [min: 0] [max: 0] [avg: 0]
```

```
Packet Statistics:  
 [ICMP: 0] [TCP: 713498] [UDP: 0] [Other: 0]
```

```
Flow Statistics:  
 ICMP:[Current: 0] [Max: 0 @ 2019-11-02 09:58:29 EDT]  
 TCP:[Current: 10] [Max: 23153 @ 2019-11-14 12:28:38 EST]  
 UDP:[Current: 0] [Max: 0 @ 2019-11-02 09:58:29 EDT]  
 Other:[Current: 0] [Max: 0 @ 2019-11-02 09:58:29 EDT]
```

```
Session Statistics:  
 [ICMP: 0] [TCP: 5] [UDP: 0] [Other: 0]
```

```
Number of SSL Sessions : 0
```

```
Policy Name : IPS-POLICY  
Running Detector Version : 12.6.130190828
```

```
Forwarding process mode : regular
```

Referring to the exhibit, which IPS deployment mode is running on the SRX5800 device?

- A. sniffer mode
- B. integrated mode
- C. monitor mode
- D. in-line tap mode

Correct Answer: B

QUESTION 5

You are not able to activate the SSH honeypot on the all-in-one Juniper ATP appliance. What would be a cause of this problem?

- A. The collector must have a minimum of two interfaces.
- B. The collector must have a minimum of three interfaces.
- C. The collector must have a minimum of five interfaces.
- D. The collector must have a minimum of four interfaces.

Correct Answer: D

Reference: https://www.juniper.net/documentation/en_US/release-independent/jatp/topics/task/configuration/jatptraffic-collectorsetting-ssh-honeypot-detection.html

[JN0-635 Practice Test](#)

[JN0-635 Study Guide](#)

[JN0-635 Exam Questions](#)