

JN0-662^{Q&As}

Service Provider Routing and Switching - Professional (JNCIP-SP)

Pass Juniper JN0-662 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/jn0-662.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



QUESTION 1


You are configuring a BGP-signaled Layer 2 VPN service. Which two statements are true in this scenario? (Choose two.)

- A. RSVP-signaled LSPs are required.
- B. The family 12vpn auto-discovery-only parameter is required for BGP sessions.
- C. The family 12vpn signaling parameter is required for BGP sessions.
- D. RSVP-signaled or LDP-signaled LSPs may be used.

Correct Answer: CD

QUESTION 2

Click the Exhibit button.

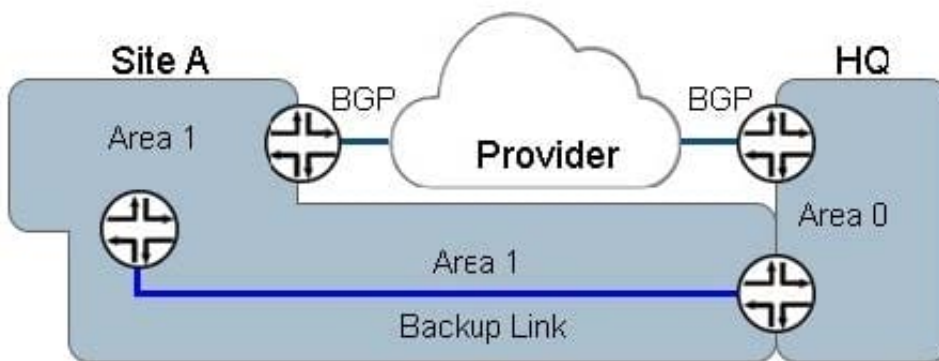

Site HQ connects to Site A through a provider using BGP. The BGP route for Site A destinations is redistributed into OSPF within site HQ. You provision a backup link over a dedicated leased line that connects to Site A, which should only be used when Site A is not reachable through the provider.

When the backup circuit is provisioned, traffic destined to Site A transits the backup link instead of the provider link.

Referring to the exhibit, how do you solve this problem?

- A. Configure the backup link to be in passive mode.
- B. Configure the backup link to be part of Area 0.
- C. Increase the metric on the backup link to Site A.
- D. Change the route preference on OSPF external routes.

Correct Answer: C

QUESTION 3

Click the exhibit button.

```
[edit routing-instances VPLS-1]
user@router# show
instance-type vpls;
vlan-tags outer 4000 inner 4001;
interface ge-1/0/1.400;
route-distinguisher 65004:12043;
vrf-target target:65005:100;
protocols {
  vpls {
    site 5 {
      site-identifier 5;
      interface ge-1/0/1.400 {
      }
    }
  }
}
```


What would be the expected outcome from the configuration shown in the exhibit?

- A. The VPLS instance would use a control-word instead of a tunnel-services interface, or no-tunnelservices parameter.
- B. The VPLS instance would default to using no-tunnel-services because a tunnel-services interface was not specified.
- C. The VPLS instance would cycle through all virtual tunnel interfaces on the router to find one to use.
- D. The VPLS instance would cycle through all physical interfaces configured on the router to find one to use.

Correct Answer: C

QUESTION 4

Click the Exhibit button.

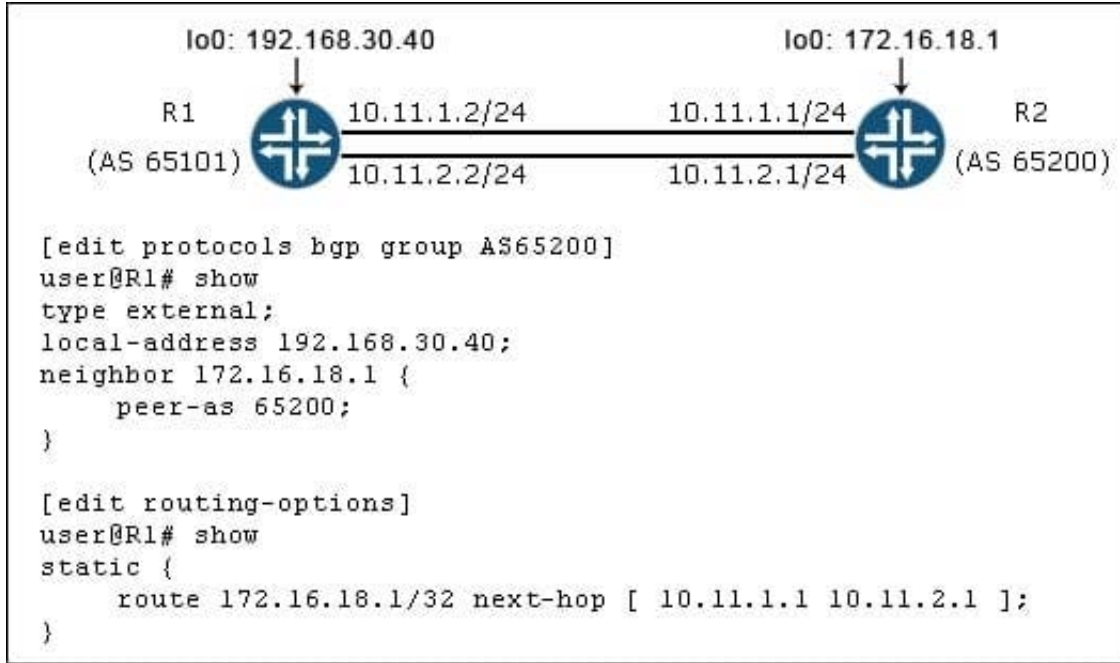

Referring to the exhibit, what must be added to the existing configuration to ensure that per-prefix load balancing occurs?

- A. multihop
- B. keep all
- C. multipath
- D. family inet unicast

Correct Answer: A

QUESTION 5

Which authentication strategy authenticates IS-IS hello PDUs only?

- A. interface authentication
- B. area authentication
- C. domain authentication
- D. level authentication

Correct Answer: D