

NS0-181^{Q&As}

NetApp Certified Storage Installation Engineer - ONTAP 9.1

Pass NetApp NS0-181 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.pass2lead.com/ns0-181.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by NetApp Official Exam Center

Instant Download After Purchase


- 100% Money Back Guarantee
- 🔅 365 Days Free Update
- 800,000+ Satisfied Customers





QUESTION 1

Click the Exhibit button.

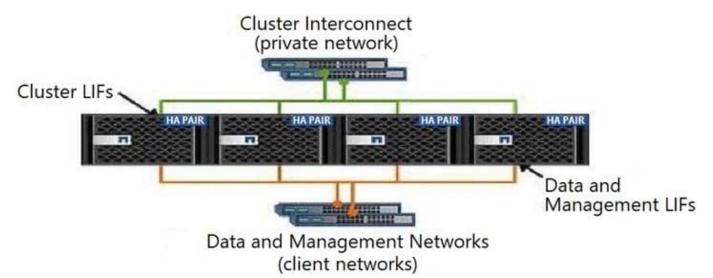

As shown in the exhibit, you have an 8-node ONTAP 9.7 cluster. You are asked to set up a SnapMirror volume relationship between node-1 and node-8 in the same cluster. In this scenario, which two network components are used by the SnapMirror volume? (Choose two.)

- A. private network
- B. cluster LIFs
- C. client network
- D. management LIFs

Correct Answer: AB

QUESTION 2

You are installing a new ONTAP 9.7 cluster and attaching the cluster to two separate networks. Your customer has indicated that the same range of client IP addresses are used on both networks and that the networks are never allowed to communicate with each other.

In this scenario, which ONTAP feature must be configured to securely allow all clients to access ONTAP NAS protocols?

- A. BGP
- B. broadcast domains
- C. routing
- D. IPspaces



Correct Answer: B

Reference: https://www.netapp.com/media/16885-tr-4182.pdf (9)

QUESTION 3

You are setting up a new AFF A400 that will serve iSCSI LUNs. You will have four iSCSI SVMs that each need to connect to an Internet Storage Name Service (iSNS) for discovery and management purposes. In this scenario, which network interface is needed for each SVM to register with the name service?

- A. SVM data LIF
- B. SVM management LIF
- C. node management LIF
- D. intercluster LIF

Correct Answer: D

QUESTION 4

In an ONTAP 9.7 cluster, which LIF role is used for sending AutoSupport, establishing Network Time Protocol (NTP), and loading software updates?

- A. cluster management LIF
- B. node management LIF
- C. data LIF
- D. cluster LIF

Correct Answer: B

Reference: https://docs.netapp.com/ontap-9/index.jsp?topic=%2Fcom.netapp.doc.dot-cm-nmg%2FGUID-DFFBE8D9-E824-4085-8FA2-24E367288CB8.html

QUESTION 5

You want to ensure the highest path resilience and performance increase to the storage stack on your FAS8700 cluster. In this scenario, which two types of stack cabling are available to use? (Choose two.)

A. quadpath HA

- B. mixed-mode
- C. single path
- D. multipath HA



Correct Answer: BD

Reference: https://www.cisco.com/c/en/us/products/collateral/switches/catalyst-9300-series-switches/white-paper-c11-741468.html

Latest NS0-181 Dumps

NS0-181 VCE Dumps

NS0-181 Exam Questions