

NS0-509^{Q&As}

NetApp Certified Implementation Engineer - SAN - ONTAP

Pass NetApp NS0-509 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/ns0-509.html>

100% Passing Guarantee
100% Money Back Assurance


Following Questions and Answers are all new published by NetApp
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

Click the Exhibit button.

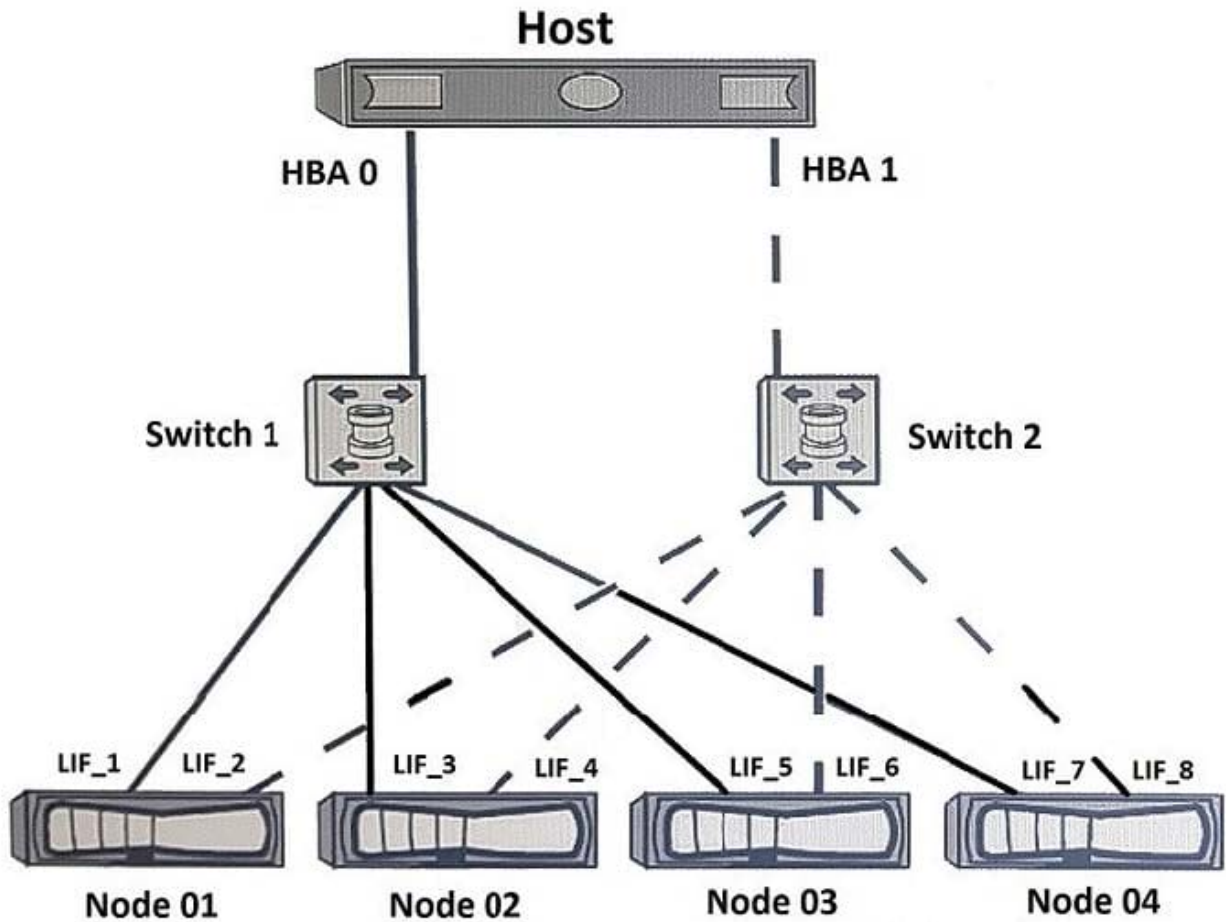

You have a LUN owned by Node 01 and mapped using the default Selective LUN Map (SLM) configuration. You want to enable your host to access this LUN and facilitate future maintenance.

Which best-practice zone configuration accomplishes this task?

- A. Zone 1: HBA 0, LIF_1, LIF_3, LIF_5 and LIF_7
Zone 2: HBA 1, LIF_2, LIF_4, LIF_6 and LIF_8
- B. Zone 1: HBA 0, HBA 1, LIF_1, LIF_2, LIF_3, LIF_4, LIF_5, LIF_6, LIF_7, LIF_8
- C. Zone 1: HBA 0, LIF_1, LIF_3
Zone 2: HBA 1, LIF_2, LIF_4
- D. Zone 1: HBA 0, HBA 1, LIF_1, LIF_2, LIF_3, LIF_4

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: D

QUESTION 2

A customer has an existing 8-node cluster that consists of six FAS2650 nodes and two FAS2554 nodes. The customer wants to expand the cluster by adding two AFF A220 nodes.

Which resource would be used to determine whether this configuration is supported?

A. Interoperability Matrix Tool (IMT)

B. Config Advisor

C. OneCollect

D. Hardware Universe (HWU)

Correct Answer: B

QUESTION 3

Click the Exhibit button.

Question	Exhibit
----------	---------

```
::> volume show -vserver svm1 -fields space-guarantee
vserver  volume  space-guarantee
-----
svm1     vol1     volume

::> tun show -fields space-reserve
vserver path                                space-reserve
-----
svm1     /vol/vol1/qtreel/lun1  disabled
```

Referring to the exhibit, which container gains space savings from deduplication, compression and compaction?

A. the aggregate

- B. the qtree
- C. the volume
- D. the LUN

Correct Answer: C

QUESTION 4

Exhibit.

Port Address	Description	Max Data Rate	Port Icon	Port Type
0a	Serial-Attached SCSI	SAS 6/12 Gbps	Circle	MiniSAS HD
0b	Serial-Attached SCSI	SAS 6/12 Gbps	Square	MiniSAS HD
e0a	Ethernet	ETH 10 Gbps	Ethernet	SFP+
e0b	Ethernet	ETH 10 Gbps	Ethernet	SFP+
e0c0c	Unified Target Adapter 2	ETH 1/10 Gbps FC 4/8/16 Gbps	Ethernet/Fibre Channel	SFP+
e0c0e	Unified Target Adapter 2	ETH 1/10 Gbps FC 4/8/16 Gbps	Ethernet/Fibre Channel	SFP+
e0c0f	Unified Target Adapter 2	ETH 1/10 Gbps FC 4/8/16 Gbps	Ethernet/Fibre Channel	SFP+
e0d0f	Unified Target Adapter 2	ETH 1/10 Gbps FC 4/8/16 Gbps	Ethernet/Fibre Channel	SFP+
e0e0f	Management	ETH 10/100/1000 Mbps	Wrench	RJ45
Serial interface 000	Serial Console	RS 115200 bps	Serial Interface	RS45
USB0	USB Serial Console	USB 12 Mbps	USB 2.0	MiniUSB Type B

An administrator has an AFF A200 HA pair.

Referring to the exhibit, how many 10 Gbps connections would the customer have on a single node for SAN host connectivity?

- A. 4
- B. 6
- C. 7
- D. 2

Correct Answer: A

QUESTION 5

How do you configure the iSCSI-SendTargets datastore when the datastore is provisioned from NetApp storage?

- A. You must configure jumbo frames when SendTargets-based iSCSI is used.
- B. Use static discovery to add the target IQN.
- C. Use dynamic discovery to add the target IQN.

D. You must configure a single protocol on the SVM when SendTargets-based iSCSI is used.

Correct Answer: C

Reference: https://www.vmware.com/pdf/vsphere4/r40_u1/vsp_40_u1_iscsi_san_cfg.pdf (37)

[Latest NS0-509 Dumps](#)

[NS0-509 VCE Dumps](#)

[NS0-509 Practice Test](#)