



1Y0-A28^{Q&As}

Implementing NetScaler 10 for Networking and Traffic Optimization

Pass Citrix 1Y0-A28 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4lead.com/1Y0-A28.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Citrix
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

Why would an engineer want to specify a TCP Profile for a specific service group?

- A. To enable use of features like SSL over TCP for that specific service group.
- B. To adjust the TCP settings for traffic to and from that specific service group.
- C. To use a specific SNIP for traffic to the back-end servers in that service group.
- D. To enable features like use source IP, TCP keep alive and TCP buffering for a specific service group.

Correct Answer: B

QUESTION 2

Scenario: A network engineer created an SSL virtual server and enabled smart card on it. The engineer tried browsing to the server and noticed the back-end system could NOT see the users certificates. What could be causing this issue?

- A. The SSL virtual server cannot forward a client certificate.
- B. The network engineer has not set smart card to mandatory.
- C. The SSL virtual server cannot use smart card authentication.
- D. The network engineer has not enabled SNI on the virtual server.
- E. The network engineer forgot to enable the SSL policy allowing smart card forwarding on the SSL virtual server.

Correct Answer: A

QUESTION 3

Scenario: A network engineer configured a new NetScaler MPX appliance without any VLANs and with a single interface connected to the network. The engineer has not completed any other configurations. The interface is then accidentally disabled and contact is lost with the appliance.

Which two actions can the network engineer take to restore communications to the appliance? (Choose two.)

- A. Connect to the SNIP instead of the NSIP.
- B. Connect another of the unused interfaces.
- C. Use the serial port to connect and then bring the disabled interface online.
- D. Connect a crossover cable to port that has been disabled and connect to the NSIP.

Correct Answer: BC



QUESTION 4

Which step could a network engineer take to prevent brute force logon attacks?

- A. Enable the Rate Limiting feature.
- B. Enable the AAA Application feature.
- C. Configure the Access Gateway Policies.
- D. Configure the Cache redirection Policies.

Correct Answer: A

QUESTION 5

Scenario: A network engineer has configured GSLB for a multisite environment. All GSLB services show as UP with an UP MEP status.

The engineer has observed that DNS queries are directed to the SNIP of the NetScaler; however, no DNS response is being received. How can the engineer resolve this issue?

- A. Add an ADNS service on the SNIP.
- B. Change the DNS delegation to the NSIP.
- C. Create a load balancing virtual server for DNS.
- D. Select the "Send all "active" service IPs\\' in response (MIR)" option.

Correct Answer: A

QUESTION 6

An engineer has bound three monitors to a service group and configured each of the monitors with a weight of 10.

How should the engineer ensure that the members of the service group are marked as DOWN when at least two monitors fail?

- A. Re-configure the weight of each monitor to 0.
- B. Configure the service group with a threshold of 21.
- C. Configure the service group with a threshold of 20.
- D. Re-configure the weight of each monitor to 5, and configure the service group threshold to 15.

Correct Answer: C

QUESTION 7



Which type of authentication server could an engineer configure in order to provide the use of RSA token authentication as a permitted authentication method to access a AAA Virtual Server?

- A. LDAP
- B. SAML
- C. RADIUS
- D. Negotiate

Correct Answer: C

QUESTION 8

A network engineer needs to upgrade both appliances of a High Availability (HA) pair. In which order should the network engineer upgrade the appliances?

- A. Disable high availability and upgrade one node at a time.
- B. Upgrade the primary node first without disabling high availability.
- C. Upgrade the secondary node first without disabling high availability.
- D. Perform the upgrade simultaneously without disabling high availability.

Correct Answer: C

QUESTION 9

Scenario: The network engineer has created a monitor and bound it to a service group containing four web servers to verify that the web application responds. During routine maintenance one of the web servers is shut down; however, the server state remains UP and user requests are still attempting to communicate with the server.

What could be causing this problem?

- A. The server has been disabled.
- B. The monitor is not bound at the correct bind point.
- C. Health monitoring is disabled for the service group.
- D. The NetScaler configuration has not been saved since before the monitor was bound.

Correct Answer: C

QUESTION 10

A public SSL certificate on a virtual server is about to expire and the NetScaler engineer needs to renew the certificate before it expires. Which step must the engineer take to renew the SSL Certificate?



- A. Generate a new CSR
- B. Recreate the Private Keys
- C. Execute CRL Management
- D. Update the existing certificate

Correct Answer: D

QUESTION 11

Scenario: The network engineer is setting up a new NetScaler using a direct connection. Three networks are connected to the NetScaler. After initial configuration and restart, the engineer would like to confirm the routing table entries.

From which location and which command should the engineer run to display the routing table?

- A. From the shell `\\netstat -r\\`
- B. From the shell `\\route monitor\\`
- C. From the command-line interface `\\show pbr\\`
- D. From the command-line interface `\\show route\\`

Correct Answer: D

QUESTION 12

Scenario: A network engineer has created two selectors to use to populate a cache group in integrated caching. One selector, "Hit," will determine what to add to the group. The other, "Inval", will select what should be invalidated.

Which command should the engineer run to create the cache group?

- A. `add cache contentgroup CacheGroup1 -hitParams Hit -invalParam Inval`
- B. `add cache contentgroup CacheGroup1 -hitSelector Hit -invalSelector Inval`
- C. `set cache contentgroup CacheGroup1 - hitParams Hit -invalParam Inval -type HTTP`
- D. `set cache contentgroup CacheGroup1 -hitSelector Hit - invalSelector Inval -type HTTP`

Correct Answer: B

QUESTION 13

Scenario: A network engineer deployed a new NetScaler MPX appliance on the network and all interfaces are connected to the core switch. The network engineer notices the CPU utilization has become very high on the switch since the NetScaler deployment.

Which two actions could the engineer perform on the NetScaler to resolve this issue? (Choose two.)



- A. Configure VMAC
- B. Utilize static routing
- C. Configure a channel
- D. Connect a single interface only

Correct Answer: CD

QUESTION 14

Scenario: An organization has recently been penetration-tested by a security company. The findings have indicated that the NetScaler device is responding to requests revealing web server information within the HTTP response headers.

Which NetScaler feature can a network engineer use to prevent this information from being leaked to a potential malicious user?

- A. Rewrite
- B. Responder
- C. Web Logging
- D. URL Transformation

Correct Answer: A

QUESTION 15

The purpose of pre-fetch in integrated caching is to automatically _____. (Choose the correct option to complete the sentence.)

- A. refresh a cached object before expiring
- B. fetch objects from the forwarding cache before expiring
- C. retrieve all objects on a published website after a policy is applied
- D. retrieve an object in the expression from a website after a policy is applied

Correct Answer: A

QUESTION 16

An network engineer is asked to perform an export of the captured trace output files as requested by Citrix Tech support. In which directory could the engineer retrieve the captured log files in the NetScaler system?

- A. /var/log
- B. /var/nstrace



C. /netscaler/log

D. /nsconfig/trace

Correct Answer: B

QUESTION 17

Scenario: A NetScaler engineer is adding a new SSL certificate to a NetScaler device. During the process the engineer receives an error message:

"Certificate with key size greater than RSA512 or DSA512 bits not supported."

The same process has been followed previously on the same model of NetScaler successfully. What is the likely cause of this error?

- A. The certificate hostname is invalid.
- B. RSA authentication has been added to the VIP.
- C. The NetScaler has not been licensed correctly.
- D. The CSR has not been submitted to the certificate authority.

Correct Answer: C

QUESTION 18

Scenario: An engineer has been asked to implement load balancing of an existing unsecured web application. The engineer needs to ensure that users will access the web application using HTTPS, but no changes can be made to the web servers hosting the web application.

In order to fulfill the requirements, the engineer must create an _____ service group and add members with port _____; and bind the service group to an _____ virtual server. (Choose the correct set of options to complete the sentence.)

- A. SSL; 443; SSL
- B. HTTP; 80; SSL
- C. SSL; 80; HTTP
- D. HTTPS; 443; HTTP

Correct Answer: B

QUESTION 19

A network engineer is investigating a recent failure of NetScaler high availability and confirms that some recent changes were made to the configuration. What is a likely cause of the failure?



- A. Load balancing virtual server marked DOWN.
- B. SNIP has had management access removed.
- C. RPC node password changed on an appliance.
- D. The network command policy has been modified.

Correct Answer: C

QUESTION 20

What should a network engineer do to prevent unauthorized users from using the root user account?

- A. Reset the nsroot account.
- B. Change the nsroot password.
- C. Create an authorization policy.
- D. Bind a policy to the root user account.

Correct Answer: B

[Latest 1Y0-A28 Dumps](#)

[1Y0-A28 Exam Questions](#)

[1Y0-A28 Braindumps](#)



To Read the [Whole Q&As](#), please purchase the [Complete Version](#) from [Our website](#).

Try our product !

100% Guaranteed Success

100% Money Back Guarantee

365 Days Free Update

Instant Download After Purchase

24x7 Customer Support

Average 99.9% Success Rate

More than 800,000 Satisfied Customers Worldwide

Multi-Platform capabilities - [Windows](#), [Mac](#), [Android](#), [iPhone](#), [iPod](#), [iPad](#), [Kindle](#)


We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications. You can view Vendor list of All Certification Exams offered:

<https://www.pass4lead.com/allproducts>

Need Help

Please provide as much detail as possible so we can best assist you.

To update a previously submitted ticket:

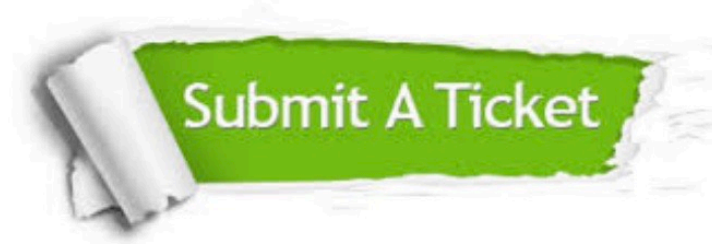

 <p>One Year Free Update Free update is available within One Year after your purchase. After One Year, you will get 50% discounts for updating. And we are proud to boast a 24/7 efficient Customer Support system via Email.</p>	 <p>Money Back Guarantee To ensure that you are spending on quality products, we provide 100% money back guarantee for 30 days from the date of purchase.</p>	 <p>Security & Privacy We respect customer privacy. We use McAfee's security service to provide you with utmost security for your personal information & peace of mind.</p>
---	---	--

Any charges made through this site will appear as Global Simulators Limited.

All trademarks are the property of their respective owners.

Copyright © pass4lead, All Rights Reserved.