

100% Money Back
Guarantee

Vendor: Cisco


Exam Code: 400-351

Exam Name: CCIE Wireless

Version: Demo

QUESTION 1

Refer to the exhibit.

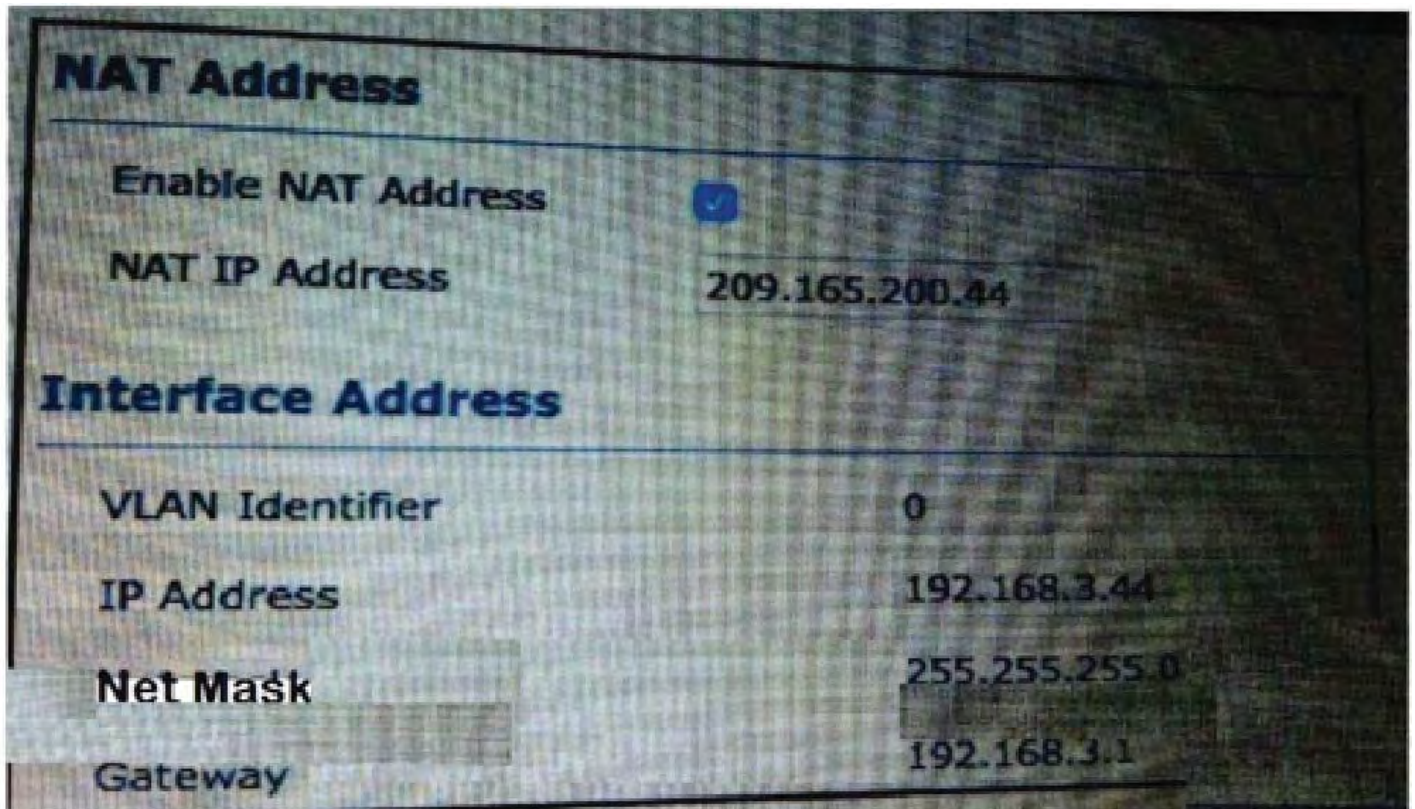

You enabled NAT to make sure that your WLC is publicly reachable. If other NAT parameters are left to default, which statement is true?

- A. The AP WLC discovery fails for APs in local mode using 209.165.200.44
- B. The AP WLC discovery succeeds for OEAPs joining the WLC using 192.168.3.44
- C. The AP WLC discovery succeeds for OEAPs joining the WLC using 192.168.3.44 or 209.165.200.44. The AP WLC discovery fails for APs in local mode using 192.168.3.44

Correct Answer: C

QUESTION 2

Which two statements about local profiling on a Cisco WLC running AireOS are true? (Choose two)

- A. Profiling is performed on IPv4 and IPv6 clients.
- B. When local profiling is enabled, RADIUS profiling is allowed.
- C. Wired clients behind the workgroup bridge are profiled and a policy action is taken.
- D. Profiling is performed only on IPv4 clients.
- E. Wired clients behind the Workgroup Bridge are not profiled and no policy action is taken.

Correct Answer: DE

QUESTION 3

Which two impact does TSPEC admission control have as it relates to 802.11e clients? (Choose two)

- A. Enforce airtime entitlement for wireless voice applications.
- B. Ensure that call quality does not degrade for existing VoWLAN calls.
- C. Deny client access to the WLAN that do not meet the standard.
- D. Allow access only for VoWLAN traffic when interference is detected.

Correct Answer: AB

QUESTION 4

```

Cisco AP Identifier..... 372
Cisco AP Name..... VC-PR0004
Country code..... Multiple Countries (US, CA,
Regulatory Domain allowed by Country..... 802.11bg:-AE 802.11g:-US
AP Country code..... US - United States
AP Regulatory Domain..... 802.11bg:-A 802.11g:-US
Switch Port Number ..... 1
MAC Address..... 4c:4e:35:a2:29:a3
IP Address Configuration..... DHCP
IP Address..... 10.63.7.107
IP NetMask..... 255.255.255.0
Gateway IP Addr..... 10.63.7.1
Administrative State ..... ADMIN_ENABLED
Operation State ..... REGISTERED
Mirroring Mode ..... Disabled
AP Mode ..... Local
Logging trap severity level ..... debugging
Logging syslog facility ..... local7
S/W Version ..... 7.6.130.209
AP Model..... AIR-CAP2602I-A-K7
AP Image..... C2600-K9W8-M
AP Image..... 15.2 (20141211:0143)

```

Refer to the exhibit

Which syslog logging facility and severity level is enabled on this AP?

- A. logging trap severity 6 logging syslog facility local7
- B. logging trap severity 3 logging syslog facility sys 10
- C. logging trap severity 5 logging syslog facility local14
- D. logging trap severity 7 logging syslog facility local 7
- E. Logging trap severity 9 logging syslog facility kernel

Correct Answer: D

QUESTION 5

Refer to the exhibit

```

radius-server local rad
server 10.10.10.10 auth-port 1812 acct-port 1813

dot11 ssid ssid1 authentication open eap eap_method
authentication network-eap eap_method
authentication key-management wpa
infrastructure-ssid optional

interface Dot11Radio1
| ssid ssid1
 encryption mode ciphers aes-ccm

radius-server local
nas 10.10.10.10 key Cisco
user cisco password Cisco

radius-server host 192.168.143.5 auth-port 1812 acct-port 1813

```

Based upon the given configuration which two statements are true? (choose two)

- A. local RADIUS server is used
- B. No password is required everyone can join wireless network
- C. Users will be required to provide a username and password for authentication
- D. User will be required to provide a password only order to get access
- E. Remote RADIUS servers is used

Correct Answer: AC

QUESTION 6

Given the IPV6 address and subnet 2001:adcb:3257:9048::j64l which option list the start and ending IP address of this subnet?

- A. 2001:adcb:3257:9048: ,2001:adcb:3257:9048:0000:0000:0000:ffff
- B. 2001:adcb:3257:9048:0:0:0:0 ,2001:adcb:3257:9048:0000:ffff:ffff:ffff
- C. 2001:adcb:3257:9048:0:0:0:0 ,2001:adcb:3257:9048: ffff:ffff:ffff:ffff
- D. 2001:adcb:3257:9048:0:0:0:0 ,2001:adbc:3257:9048:0000:0000:0000:ffff
- E. 2001:adcb:3257:9048:0:0:0:0 ,2001:adcb:3257:9048:0000:0000:ffff:ffff
- F. 2001:adcb:3257:9048:0:, ,2001:adcb:3257:9048:0000:0000:0000:ffff

Correct Answer: C

QUESTION 7

You have added your active directory server to the cisco ISE and see the status as operational. However when you try to add active directory groups to your authorization policy conditions in the Cisco ISE, no active Directory groups appear, what is the most likely reason?

- A. The credentials used to join the Cisco ISE to active directory do not have succulent privileges to query active directory.
- B. You did not add any attribute in the Active Directory join point under the External identify source
- C. You did not add any groups in the Active Directory jom point under the External identity source
- D. D. A firewall is blocking tcp port 389 between the cisco ISE and active directory

Correct Answer: C

QUESTION 8

Which two types of interface events are common for clean Air?(choose two)

- A. Microwave interference
- B. Co-channel interference
- C. Spontaneous interference
- D. Persistent interference

Correct Answer: CD

QUESTION 9

Flexconnect APs have already deployed in a branch office for local switching. Currently the WLAN in the large auditorium is proposed to change to high-density design and thus some low data rates are proposed to be disabled while keeping the data rates in other areas under the same Cisco WLC. Which configuration settings must be modified in the Cisco WLC to achieve this configuration?(choose two)

- A. Flex connect groupS
- B. Mobility groups
- C. AP Groups
- D. RF profiles

Correct Answer: CD

QUESTION 10

Which two AP join process are supported by the cisco 5760 WLC?(choose Two)

- A. Layer 2 CAPWAP discovery
- B. Remotely stored controller IP address discovery
- C. DNS discovery
- D. Layer 3 CAPWAP discovery

Correct Answer: CD

QUESTION 11

Prime infrastructure will trigger alarms indicating that the prime infrastructure physical or virtual server is low on disk space as the administrator which three actions can you take to increase disk space immediately upon receiving a major alert (60 percent disk usage)? (choose three)

- A. Change the disk controller RAID
- B. Enable cron job on ade for disk clean up using \$ du-sh
- C. Compacting the PI database using the NCS CLEANUP command
- D. Reduce the storage load on the local disk by setting up and using remote backup repositories
- E. Reduce the length of time you store client association data and related events.
- F. Compacting the PI database using the NCS DATABASE PURGE command

Correct Answer: CDE

QUESTION 12

You are deploying cisco 792x wireless phones on your on your Cisco unified wireless network . Which two configuration setting are recommended?

- A. Enable PSPF
- B. Enable DTTPC
- C. Enable WMM
- D. Enable PMF

Correct Answer: BC

QUESTION 13

Which two cisco ISE option simplify the use of EAP-TLS authentication in a BYOD environment using PKI? (choose two)

- A. Simple Certificate Enrollment Protocol
- B. Lightweight Directory Access Protocol
- C. Online Certificate Stats Protocol
- D. Native Supplicant Provisioning
- E. Certificate Signing Request.

Correct Answer: AE

QUESTION 14

Your customer has a Cisco unified Wireless Network running AireOS 8.0 and wants to learn about the FlexConnect mode that is available on his APs, which two statements are true?(choose two)

- A. When an AP is changed from local mode to FlexConnect mode a reboot is required.
- B. A newly connected AP can be booted in FlexConnect mode
- C. When an AP is changed from local mode to FlexConnect mode a reboot is not required.
- D. Cisco Centralized Key Management require the use of FlexConnect group

Correct Answer: CD

QUESTION 15

What are two differences between wireless QoS and wired QoS on an autonomous AP? (choose two)


- A. WirelessQoS does FIFO and RED on Ethernet egress ports
- B. WirelessQoS can prioritize packet based on DSCP/TOS/ COS or EXP values.
- C. WirelessQoS MQC policy-maps support only set cos action
- D. WirelessQoS carries out WMM type of queuing on the radio egress port
- E. WirelessQoS support ISL 802.10 and 802.1p tagged packets.

Correct Answer: BC

QUESTION 16

Which topology is a valid and functional convergence access topology?

- 5760-AIR-CT5760-25-kg
- 3850-WS-C3850-48P-s
- 5508-AIR-CT55098+25-kg
- 2960-WS-C2960+24TC-S
- 3650-WS-C3650-24TS-L
- 3702-AIR-cap3702i-A-K9

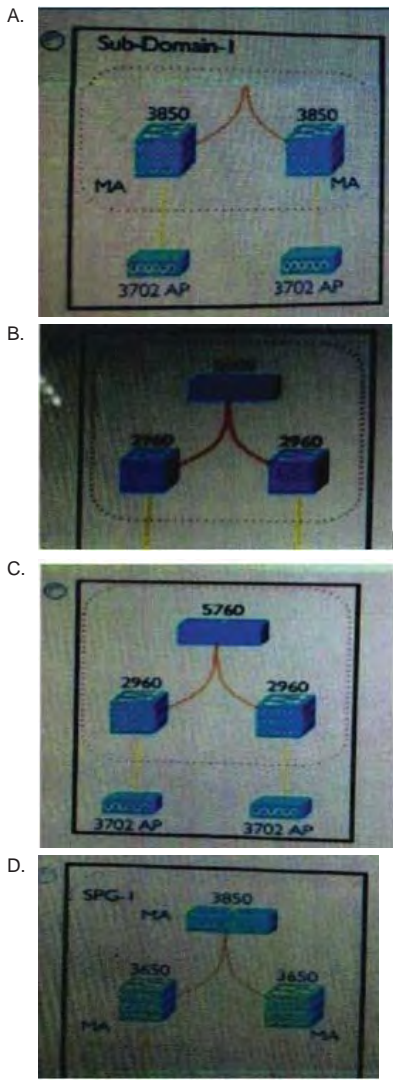

Correct Answer: A

QUESTION 17


Which Cisco WLC configuration option should be used if you do not want to require guest user to re authenticate via local web authentication when their device has not been associated to the cisco WLC for a longer period?

- A. Condition Web Redirect
- B. Client user idle timeout
- C. Session Timeout
- D. Sleeping Client

Correct Answer: D

QUESTION 18

Refer to the exhibit.

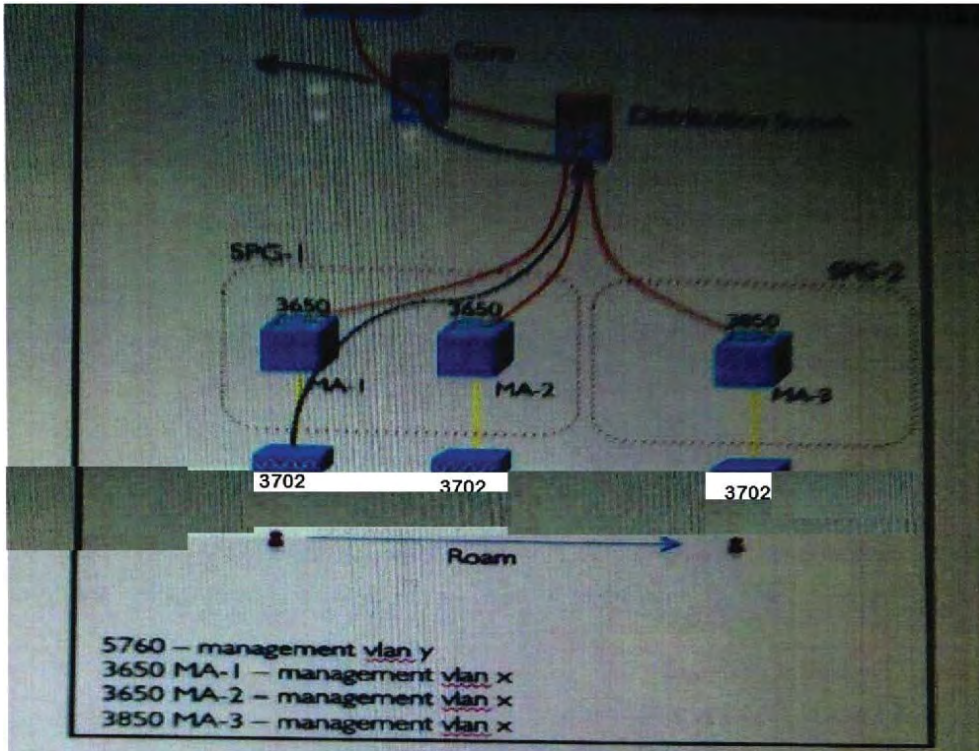

A wireless user has roamed from an AP connected to MA 1 to AP connected to MA 3. The traffic flow for the user between roam is shown. Which option shows the traffic flow for the user after roam considering default sticky anchoring is enabled on the WLAN?

- A. MA-3>Distribution switch>core>mc>distribution switch >MA-1
- B. MA-3>Distributionswitch>MA-1distributionswitch>core
- C. MA-3>Distributionswitch>MA-2>Distributionswitch>core
- D. MA-3> Distribution switch >ma -2> MA-1>Distribution switch>core

Correct Answer: A

QUESTION 19

Refer the exhibit.

```

switchport trunk allowed vlan 172,2149-2157,2175-2178,2182,2183,2185,2186
switchport trunk allowed vlan add 2301
switchport mode trunk

S13E.G.R046-6500-1#show run int vlan 2150
!
interface Vlan2150
 description Wireless Voice users
 ip address 10.64.0.10 255.255.255.0

S13E.G.R046-6500-1#show mls qos
QoS is enabled globally
Policy marking depends on port trust
QoS ip packet dscp rewrite enabled globally
QoS serial policing mode disabled globally
Input mode for GRE Tunnel is Pipe mode
Input mode for MPLS is Pipe mode
QoS Trust state is CoS on the following interface:
Tel/5/4 Tel/5/5 Tel/6/5 Te2/5/4 Te2/5/5 Te2/6/5 Po10 Po20
Vlan or Portchannel (Multi-Earl) policies supported: Yes
Egress policies supported: Yes
QoS 10g-only mode supported: Yes [Current mode: Off]

```

Wireless voice users on VLAN 2150 report poor voice quality during heavy network usage. The WLC is configured correctly. Given the configuration in the exhibit, which possible cause of the problem is true?

- A. MLSQoS is not enabled on the switch.
- B. VLAN 2150 is not allowed on the trunk port of the switch

- C. The WLC switch port does not trust CoS values for Voice traffic that traverses the WLC
- D. The wireless voice VLAN does not have the proper QoS settings.

Correct Answer: C

QUESTION 20

Which two statements are true about the client report functionality in prime infrastructure 2.2? (Choose Two).

- A. The "Client Session" report displays 802.11 and security statistics
- B. The "Client Count" report displays the total number of active clients on the network
- C. The "Busiest Clients" report does not include autonomous clients
- D. The "Client Count" report includes clients to autonomous Cisco IOS APs.

Correct Answer: BD


QUESTION 21

802.11k and 802.11r-enabled client devices send a request for a list of neighbor APs (a neighbor list) from the APs they are currently associated with. What is this 802.11 management frame also known as?

- A. association response
- B. association packet
- C. beacon frame
- D. action packet

Correct Answer: D

QUESTION 22

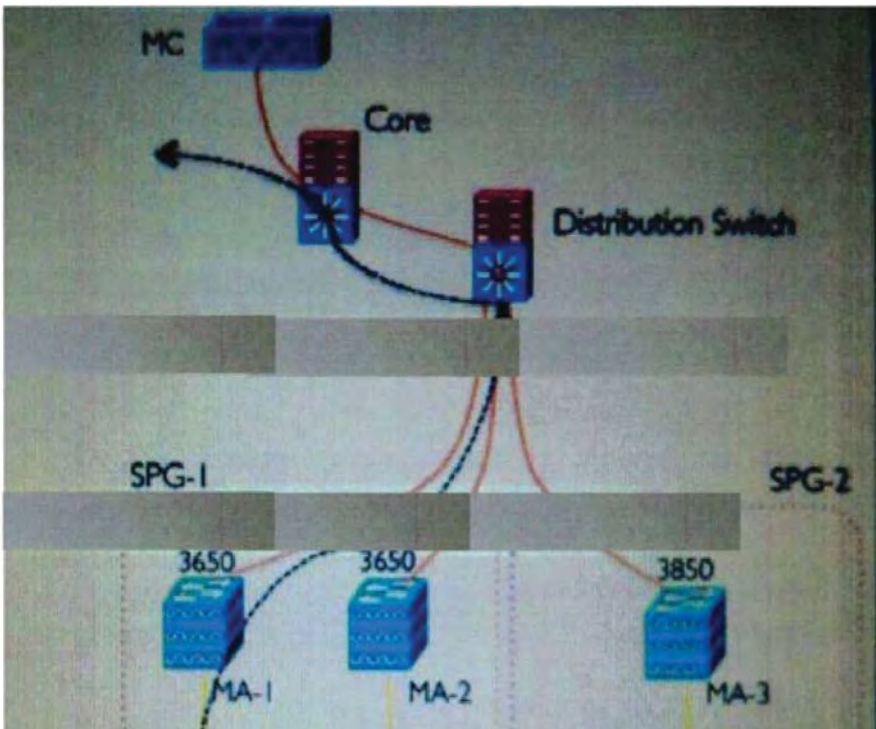

Refer to the exhibit.

A Wireless user has roamed from an AP connected to MA-1 to an AP connected to MA-3. The traffic flow for the user before the roam is shown. Which option shows the traffic flow for the user after the roam considering default sticky anchoring is disabled on the WLAN and WLAN to VLAN mapping and roaming domain IDs are identical on both sides?

- A. MA-3 > Distribution Switch > MA-1 > Distribution Switch > Core
- B. MA-3 > Distribution Switch > MA-2 > MA-1 > Distribution Switch > Core
- C. MA-3 > Distribution Switch > MA-2 > MA-1 > Distribution Switch > Core
- D. MA-3 > Distribution Switch > Core

Correct Answer: D

QUESTION 23

Which two features require Network Time Protocol synchronization on the Cisco 5760 WLC? (Choose two)

- A. AP CAPWAP multicast
- B. SNMPv3
- C. AP authentication
- D. Band Select

Correct Answer: BC

QUESTION 24

Refer to the exhibit.

To Read the [Whole Q&As](#), please purchase the [Complete Version](#) from [Our website](#).

Trying our product !

- ★ **100%** Guaranteed Success
- ★ **100%** Money Back Guarantee
- ★ **365 Days** Free Update
- ★ **Instant Download** After Purchase
- ★ **24x7** Customer Support
- ★ Average **99.9%** Success Rate
- ★ More than **69,000** Satisfied Customers Worldwide
- ★ Multi-Platform capabilities - **Windows, Mac, Android, iPhone, iPod, iPad, Kindle**

Need Help

Please provide as much detail as possible so we can best assist you.

To update a previously submitted ticket:



 One Year Free Update <p>Free update is available within One Year after your purchase. After One Year, you will get 50% discounts for updating. And we are proud to boast a 24/7 efficient Customer Support system via Email.</p>	 Money Back Guarantee <p>To ensure that you are spending on quality products, we provide 100% money back guarantee for 30 days from the date of purchase.</p>	 Security & Privacy <p>We respect customer privacy. We use McAfee's security service to provide you with utmost security for your personal information & peace of mind.</p>
---	---	--

[Guarantee & Policy](#) | [Privacy & Policy](#) | [Terms & Conditions](#)

Any charges made through this site will appear as Global Simulators Limited.

All trademarks are the property of their respective owners.

Copyright © 2004-2015, All Rights Reserved.