

HP2-Z32^{Q&As}

Implementing HP MSM Wireless Networks

Pass HP HP2-Z32 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/hp2-z32.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

When Centralized Access Control is configured as Automatic, when is a user data tunnel created?

- A. when more than one controller is on the network that has the same access control configuration
- B. when tunnels are manually configured and available
- C. when IPsec is set up between two controllers
- D. when a synchronized AP and its controller are on different subnets

Correct Answer: D

QUESTION 2

Refer to the exhibit.

The screenshot shows a table of VSC profiles. The table has columns for Name, Ingress (SSID, VLAN), Egress (GRE, VLAN), Encryption (TKIP, AES, WEP), and Authentication (802.1x, MAC, HTML). The 'HP' profile is the default and has SSID Off, GRE and Egress VLAN set to '-', and HTML authentication checked. The 'Hospital' profile has SSID On and Egress VLAN checked, with HTML authentication also checked. A legend at the bottom explains the icons: a key icon for 'Access controlled', a red X for 'SSID Off', a blue key icon for 'SSID On', and a blue key icon with a lock for 'SSID On and configured for broadcast'.

Name	Ingress		Egress		Encryption			Authentication		
	SSID	VLAN	GRE	VLAN	TKIP	AES	WEP	802.1x	MAC	HTML
HP (Default)	X HP		-	-	-	-	-	-	-	✓
Hospital	🔑 Hospital		-	✓	-	-	-	-	-	✓

🔑 = Access controlled X = SSID Off 🔑 = SSID On 🔑 = SSID On and configured for broadcast

A hospital has an HP MSM solution that provides guest access, including Web-Auth to the local login pages of the controller. The exhibit shows the Hospital VSC used by guests. The network administrators have created an isolated guest VLAN, VLAN 100. The HP MSM Controller should provide the same guest services to wired clients connected to this VLAN. The network administrator has configured a network profile and the required settings. How should the controller apply the profile in the VSC?

- A. As the egress VLAN for unauthenticated users
- B. As the egress VLAN for authenticated users
- C. As the ingress VLAN
- D. As the egress VLAN for intercepted users

Correct Answer: A

QUESTION 3

Which VSCs require the implementation of opportunistic key caching?

- A. Any VSC that supports Layer 3 roaming
- B. All VSCs that are secured by WPA/WPA2-PSK or WPA/WPA2 with 802.1x
- C. Any VSC that is secured by WPA/WPA2 with 802.1x
- D. All access-controlled VSCs

Correct Answer: C

QUESTION 4

A company wants to use MSM765 zI Controllers in a team solution that supports 750 MSM APs. What must the company purchase for this solution?

- A. Six MSM765 zJ Controllers
- B. Five MSM765 zI Controllers and an additional Premium license for each one
- C. Four MSM765 zI Controllers and an additional Premium license for each one
- D. Four MSU765 zI Controllers

Correct Answer: B

QUESTION 5

Which type of 802.11 wireless network provides direct peer-to-peer connection between wireless stations?

- A. Infrastructure network
- B. Ad hoc network
- C. In-cell relay networking
- D. Wireless distribution system

Correct Answer: B

QUESTION 6

A hospital requires a wireless solution for visitors. The network administration wants to prevent guests from accessing the Internet until they agree to a legal policy and log in on a Web page supported by the controller. Which file should the network administrator provide to the web designer to customize for this purpose?

- A. subscribe.asp
- B. index.asp
- C. public-ip.asp

D. welcome.asp

Correct Answer: B

QUESTION 7


Which feature is supported by an MSM720 but not by and MSM760?

- A. The ability to manage up to 200 Aps
- B. Teaming that is enabled through a premium license
- C. Fast roaming that is enabled through a premium license
- D. Multiple ports that you can combine in link aggregation groups

Correct Answer: D

QUESTION 8

Refer to the exhibit.

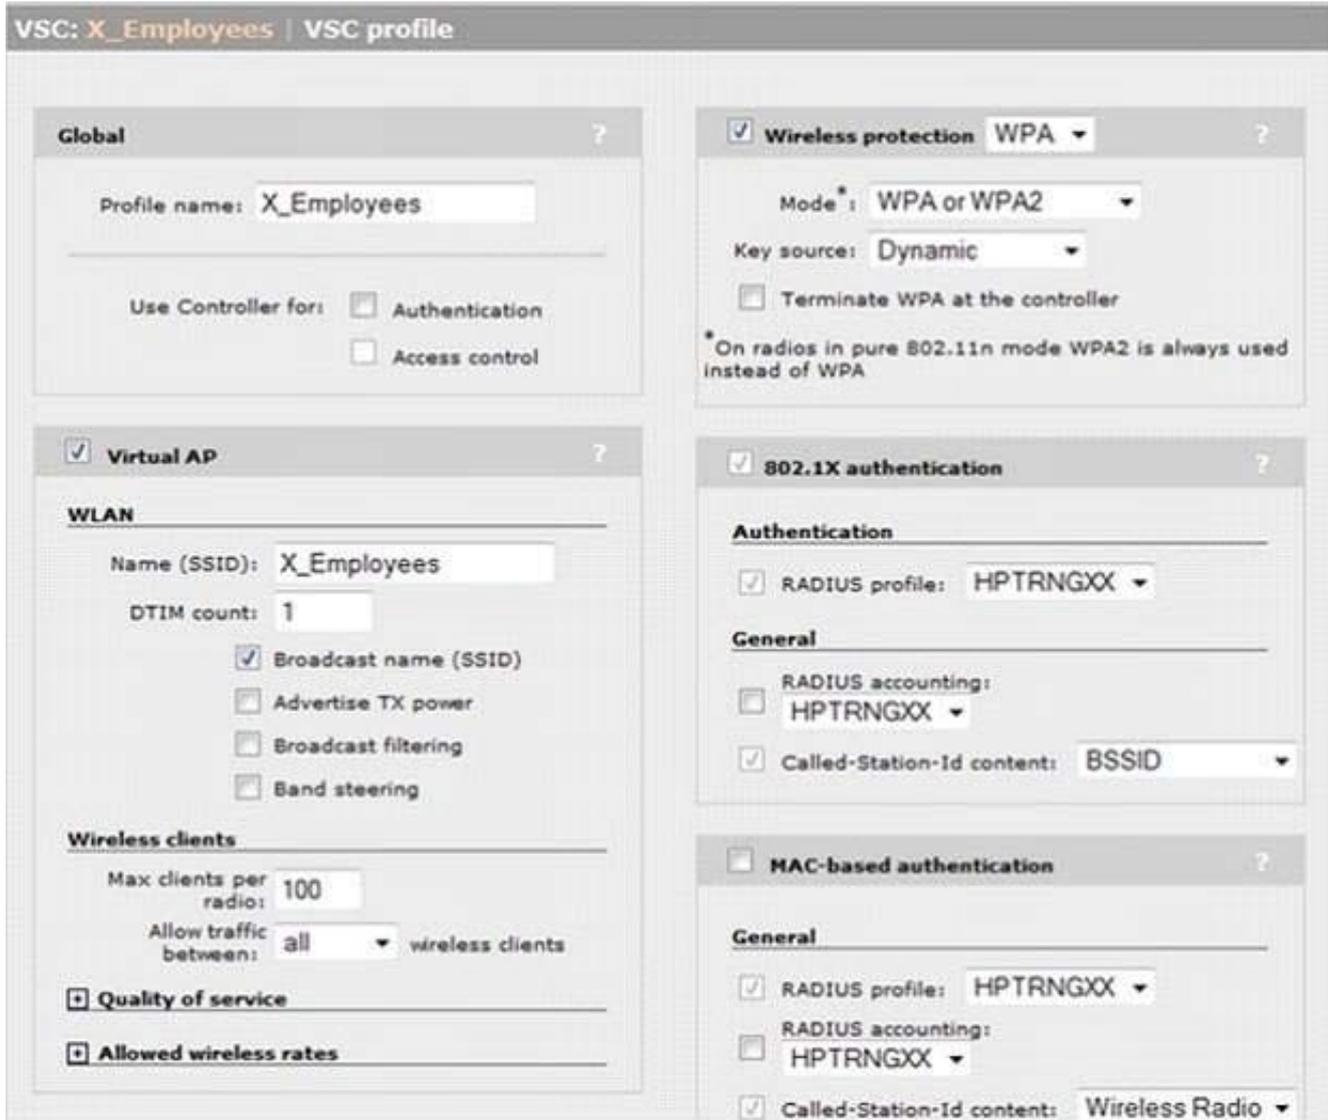

The exhibit shows the settings for the X_Employees VSC. Which devices will negotiate the EAP method for this VSC?

- A. MSM AP and the external RADIUS server
- B. Station and the MSM AP
- C. Station and the external RADIUS server
- D. Station and the internal RADIUS server of the MSM Controller

Correct Answer: D

QUESTION 9

When is AP Provisioning required before deploying controlled APs in a simple network topology?

- A. When using a Local Mesh to connect to the network

- B. When an AP needs to be deployed with dynamic IP addressing
- C. When the access point is using a Group other than the Default Group
- D. Discovery of third-party access points
- E. When you have Layer 2 connectivity to a controller

Correct Answer: A

QUESTION 10

A network administrator wants to collect and monitor statistics from across an enterprise wireless network. The network includes three HP MSM765 Controllers and 440 HP MSM APs. The network administrator also wants to monitor other network infrastructure devices, including HP and non-HP switches. Which solution best provides this capability?


- A. HP RF Manager
- B. HP Intelligent Management Center (IMC) Basic Software Platform
- C. HP Manager and RF Planner
- D. HP IMC and Wireless Services Manager (WSM)

Correct Answer: D

QUESTION 11

Refer to the exhibit.

Wireless local mesh

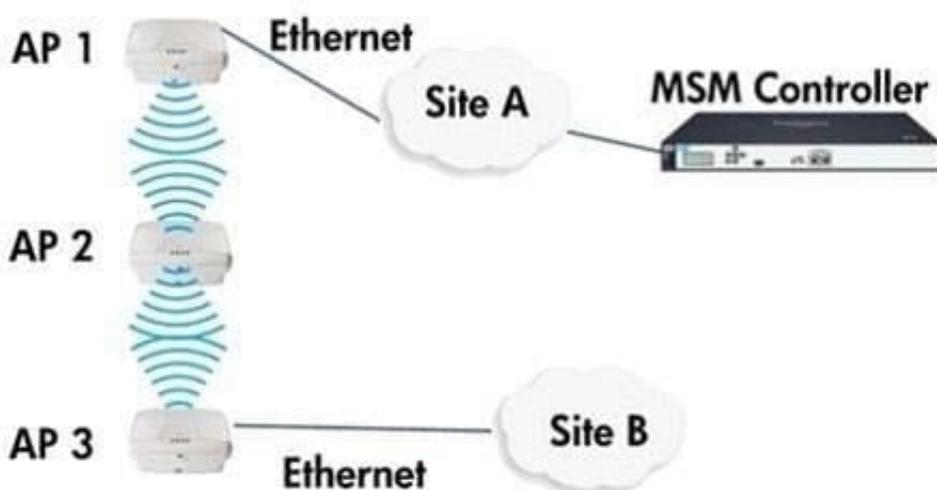

A network administrator needs to configure a local mesh between the three APs shown in the exhibit. The network administrator configured AP1 for the master role. What are valid roles for AP 2 and AP 3?

- A. 2 = Alternate Master; 3 - Slave

B. 2 = Slave; 3 = Alternate Master

C. 2 = Slave; 3 = Master

D. 2 = Slave; 3 = Slave

Correct Answer: C

QUESTION 12

A company has an MSM solution that includes an MSM760 Controller and MSM APs. The VSC for the employees does not use the controller for access control. Employees' wireless clients should be assigned to VLAN 10.

How should the MSM administrator define the VLAN 10 setting?

A. As an authorized egress VLAN in the VSC

B. As an IP interface on the controller's Internet port

C. As an egress VLAN in the VSC binding for the AP group

D. As an ingress VLAN in the VSC

Correct Answer: C

QUESTION 13

In addition to the data transmit rate, which other parameter is configurable for the QoS Priority levels?

A. Notification of blocking enable

B. Receive rate

C. Retry amount

D. Drop or queue choice

Correct Answer: B

QUESTION 14

A hotel chain requires an HP MSM for guests who log in through web pages hosted on the HP MSM Controller. The company wants to customize the pages with its own logos, pictures, and messaging. What are valid ways that the network administrator can load the customized pages on the controller? (Select two)

A. Replace and add individual files, which are saved on the local management station.

B. Load the entire set of pages from a zip file on the local management station.

C. Load the pages on the controller from an FTP server.

D. Synchronization with an external Web server and download the pages from it.

E. Define login-url, welcome-url, and goodbye-url attributes to load the pages.

Correct Answer: BC

QUESTION 15

Which devices negotiate the Extensible Authentication Protocol (EAP) method during the 802.1X authentication process?

A. only the station and authentication server

B. the station, authenticator, and authentication server

C. only the authenticator and authentication server

D. only the station and authenticator

Correct Answer: B

[HP2-Z32 PDF Dumps](#)

[HP2-Z32 Exam Questions](#)

[HP2-Z32 Braindumps](#)