

HPE6-A70^{Q&As}

Aruba Certified Mobility Associate Exam

Pass HP HPE6-A70 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/hpe6-a70.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

Refer to the exhibits.

Exhibit 1

Server not found

Firefox can't find the server at www.google.com.

- Check the address for typing errors such as **ww**.example.com instead of **www**.example.com
- If you are unable to load any pages, check your computer's network connection.
- If your computer or network is protected by a firewall or proxy, make sure that Firefox is permitted to access the Web.



Exhibit 2

Client	Health(%)	IP Address	Band	Radio PHY	Client PHY	Device	Role	Forward Mode
d8:50:e60:f3:6e:bd	98	192.168.99.2	5GHz	VHT 80 MHz	VHT 80 MHz	Unknown	exam_g...t-logon	Tunnel

A company has a Mobility Master (MM)-based solution with a guest WLAN. Users can connect to the WLAN, but they receive the error shown browser rather than see login page. Exhibit 2 shows the status for one of the guest clients.

What is one issue that could cause the errors described?

- A. The firewall blocks DHCP traffic between the guest clients and the DHCP server.
- B. The DHCP pool for guests does not assign users a DNS server address.
- C. The MM and Mobility Controllers (MCs) have invalid certificates.
- D. The Captive Portal is not enabled for the role to which these clients are assigned.

Correct Answer: B

QUESTION 2

What is an example of a Layer2 wireless threat that a wireless intrusion detection system (WIDS) should detect?

- A. 802.11 association floods
- B. RF jamming
- C. Bluetooth interference
- D. spyware

Correct Answer: A

QUESTION 3

Refer to the exhibit.

```
(MM) ^[mynode] #show airmatch solution

Seq Time Aps [5GHz] Radios Cost Conflict Deploy [2GHz] Radios Cost Conflict Deploy Type
#2 20161230_05:04:51 1 1 1.0 0.0 No 1 4.0 0.0 No Scheduled
#1 20161228_12:45:24 1 1 1.0 0.0 Yes 1 4.0 0.0 Yes Incremental - Auto

(MM) [mynode] #show airmatch solution 2

# 20161230_05:04:51 Scheduled
# 5GHz capacity/network cost/solution cost/improvement: 4.0/1.0/1.0/0.0%
# 2.4GHz capacity/network cost/solution cost/improvement: 1.0/4.0/4.0/0.0%
# Band Radio Mode Chan CBW EIRP (dBm) APName
5GHz 70:3a:0e:59:81:30 AP 157i 80. 18. EastAP
2GHz 70:3a:0e:59:81:20 AP 1i 20* 9. EastAP

[*] regarded frozen | [.] no change | [i] channel ignored because insufficient quality increase
```

An Aruba solution uses AirMatch with the default AirMatch profile settings. A network administrator sees that a scheduled optimization was completed, but a plan was not deployed.

Based on the exhibit, why did this occur?

- A. The cost of the new plan exceeds the amount allowed by the feature license
- B. The new plan did not offer significantly improved quality
- C. The solution uses master-local mode
- D. ARM is disabled in the radio profile, so AP radios are considered frozen

Correct Answer: B

QUESTION 4

A company has a single Aruba Mobility Master (MM)-based solution with two Mobility Controllers (MCs). Network administrators want APs in building 1 to support a WLAN but do not want APs in building 2 to support the WLAN. How can administrator ensure that they can enforce this rule as they set up the WLAN in the Mobility Master (MM) Interface?

- A. Place APs in different buildings in different AP Groups.

- B. Assign APs in different buildings to different MM nodes.
- C. Configure APs in different buildings to use different frequency bands.
- D. Assign different radio profiles to APs in different buildings.

Correct Answer: A

QUESTION 5


Which authentication server option would the network administrator choose to authenticate a wireless user directly against an Active Directory (AD) domain controller without NPS or IAS?

- A. LDAP server
- B. RFC 3576 server
- C. TACACS server
- D. RADIUS server

Correct Answer: A

QUESTION 6

Refer to the exhibit.

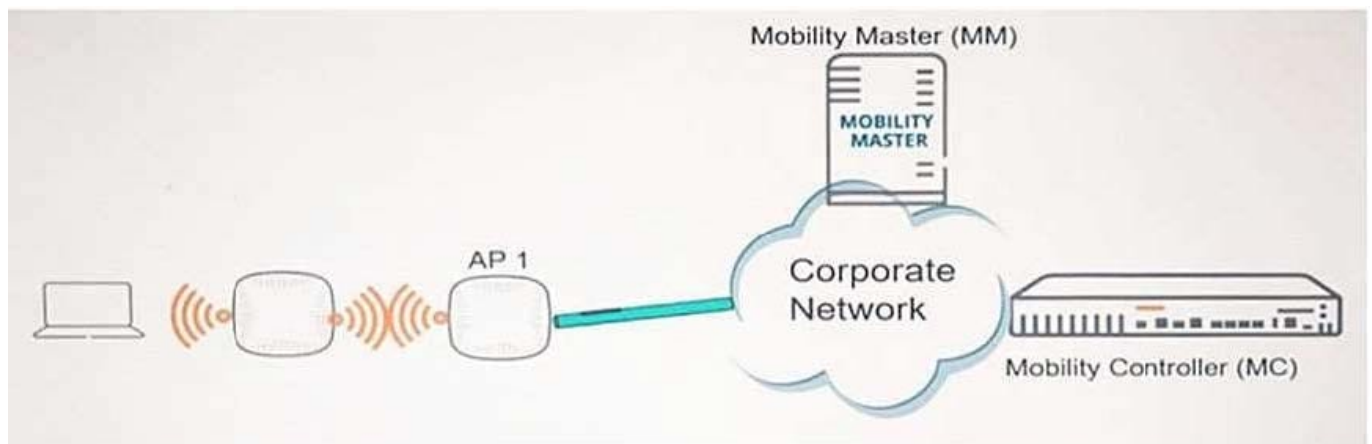

Which role must AP 1 play?

- A. Remote AP (RAP)
- B. Mesh Portal AP
- C. Instant AP (IAP)
- D. Mesh Point AP

Correct Answer: B

QUESTION 7

Which class of controller is more appropriate in a branch installation with up to 64 APs?

- A. 7008
- B. 7030
- C. 7205
- D. 7210

Correct Answer: B

QUESTION 8


Assume that administrators accept the default forwarding mode for WLANs. How does wireless user traffic flow in a master-local architecture, and how does it flow in a Mobility Master (MM) architecture?

- A. In the master-local architecture, all traffic is tunneled to the master controller to handle. In a MM architecture, all traffic is tunneled to the MM to handle.
- B. In both architectures, APs forward corporate user traffic locally and tunnel guest user traffic to a Mobility Controller (MC) to handle.
- C. In both architectures, traffic is tunneled to a Mobility Controller (MC) to handle.
- D. In the master-local architecture, traffic is tunneled to a local Mobility Controller (MC) to handle. In a MM architecture, all traffic is tunneled to the MM to handle.

Correct Answer: C

QUESTION 9

Refer to the exhibit.

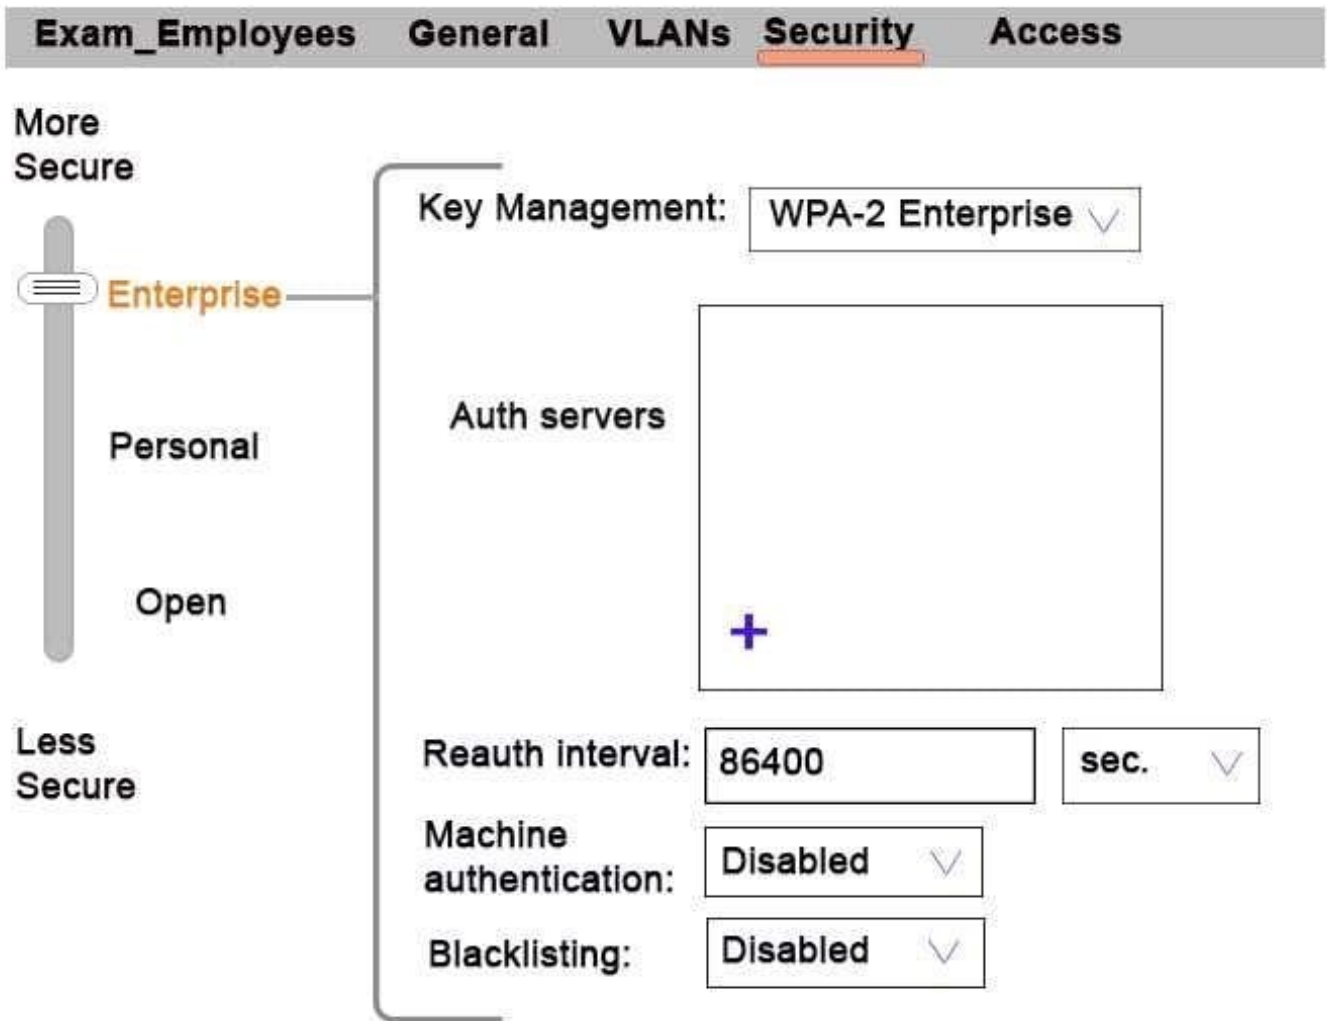

Network administrators need to set up a WLAN that uses WPA2 encryption and authenticates users with a preshared key (PSK) that is the same for all users. Administrators do not see where they should specify the option for the preshared key.

What should the administrators do?

- A. Click Personal in the slide bar.
- B. Click the + icon in the Authentication server section
- C. Return to the first page in the wizard and select the guest option
- D. Configure an L3 authentication profile after the WLAN wizard is complete

Correct Answer: A

QUESTION 10

How does WPA2 protect wireless user traffic in the air?

- A. It provides data integrity with AES and no data privacy.
- B. It provides both data integrity and privacy with AES.
- C. It provides data privacy with TKIP and no data integrity.
- D. It provides data integrity with TKIP and data privacy with AES.

Correct Answer: B

QUESTION 11

A network administrator monitors an Aruba Mobility Controller with Aruba AirWave and sees the configuration status is Error. What should the administrator conclude?

- A. AirWave checks the controller configuration and detects a syntax error.
- B. AirWave determines that the controller configuration does not match the template for its group.
- C. AirWave has a communication issue with the controller and cannot check the configuration.
- D. AirWave detects a mismatch with the controller configuration and software version.

Correct Answer: C

QUESTION 12

A company has an Aruba Mobility Master (MM)-based solution with a WLAN that assigns users to VLANs 10-19. The company wants the Aruba solution to act at Layer 3 to route wireless user traffic. What must network administrators configure to permit the solution to forward traffic correctly?

- A. VLAN 10-19 interfaces and proper IP settings on the MM nodes
- B. trunk ports that support VLANs 10-19 on the managed Mobility Controllers (MCs)
- C. VLAN 10-19 interfaces on the Mobility Controllers (MCs) as the default gateway for wireless users
- D. trunk ports that support VLANs 10-19 on the MM nodes

Correct Answer: C

QUESTION 13

A company deploys an Aruba wireless solution for the first time. In which deployment is clustering supported?


- A. deployment as Mobility Masters (MMs)
- B. deployment as a standalone VMC
- C. deployment in 7000 Series standalone mode

D. deployment in master-local mode

Correct Answer: A

QUESTION 14

Refer to the exhibit.

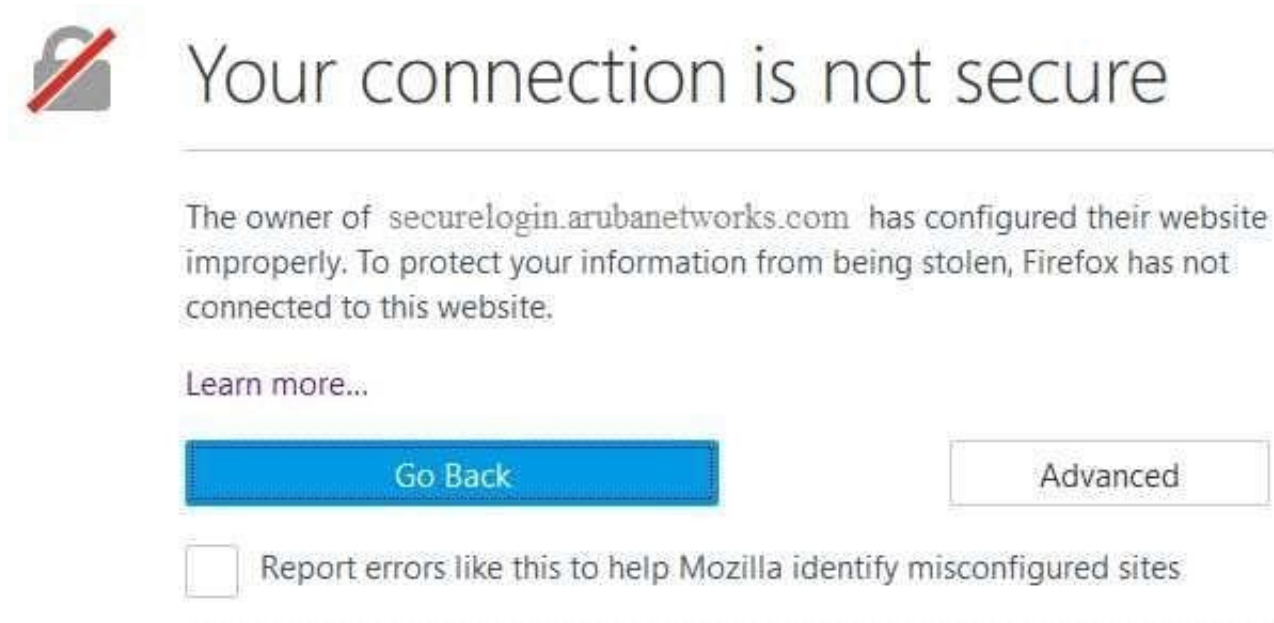

A company has a Mobility Master (MM)-based solution with a guest WLAN. During the captive portal redirection, users who access a non-HTTPS Website see the error shown in the exhibit.

How can a network administrator prevent this error?

- A. Enable automatic CPSec certificate deployment.
- B. Replace the default Mobility Master certificate with a certificate that has the correct hostname.
- C. Replace the default server certificate for mobility controllers with a certificate signed by a trusted CA.
- D. Reconfigure the guest WLAN to use EAP methods that rely on passwords rather than certificates.

Correct Answer: C

QUESTION 15

A company has an Aruba Mobility Master (MM)-based solution. Where can a network administrator look to find a list of alerts about a variety of issues on the MM or managed devices?

- A. the Potential Issues dashboard
- B. the top banner

C. the MM Maintenance pages

D. the Performance dashboard

Correct Answer: B

[Latest HPE6-A70 Dumps](#)

[HPE6-A70 Study Guide](#)

[HPE6-A70 Exam Questions](#)