

# JN0-451<sup>Q&As</sup>

Mist AI - Specialist (JNCIS-MistAI)

## Pass Juniper JN0-451 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/jn0-451.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper  
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



**QUESTION 1**

According to the Coverage SLE, which classifier tracks a client that transmits at a lower data rate than the AP to which it is connected?

- A. Asymmetry Downlink
- B. Wi-Fi Interference
- C. Asymmetry Uplink
- D. Slow OKC Roam

Correct Answer: C

---

**QUESTION 2**

You have deployed location services at a site and have installed an application which includes the Mist SDK on Bluetooth-only mobile client devices. The devices with the SDK-enabled app have Bluetooth enabled, but the devices do not appear in the Mist GUI under Clients/App Clients.

What is causing this problem?

- A. There is BLE and Wi-Fi co-channel interference.
- B. The clients are connected to the wrong WLAN.
- C. The AP BLE radios do not hear the SDK-enabled client's BLE beacons.
- D. The client devices are not connected to Wi-Fi or to a cellular data plan.

Correct Answer: C

---

**QUESTION 3**

Referring to the exhibit, what is the site ID?

The screenshot shows the Mist Systems 'Access Points' dashboard for a 'Live Demo' site. It displays 10 Access Points and 7 Wireless Clients. Summary cards show: 70% Connection Status, 100% VLANs, and 70% Version Compliance. A table lists the following APs:

Status	Name	MAC Address	IP Address	External IP Address	No. Clients	4GHz Clients	5GHz Clients
Connected	LD_Kitchen	5c5b350e086d	10.2.11.245	73.92.124.103	1	0	1
Connected	LD_Marvis	5c5b350e4592	10.2.12.170	73.92.124.103	2	0	2
Connected	LD_Reley-Desk-A	5c5b35215789	10.2.14.131	73.92.124.103	0	0	0
Connected	LD_Deckard-Mesh-Base	5c5b3521597d	10.2.13.28	73.92.124.103	1	0	1
Connected	LD_Deckard-Mesh-Relay	5c5b35215c5c	5c5b35215c5c	73.92.124.103	1	0	1

- A. 9777c1a0-6ef6-11e6-8bbf-02e208b2d34
- B. 02e208b2d34
- C. 02e208b2d34f
- D. 978c48e6-6ef6-11e6-8bbf-02e208b2d34f

Correct Answer: D

Reference: <https://www.mist.com/documentation/find-org-site-id/>

**QUESTION 4**

You are using location-based services (LBS) at a new warehouse and placed the APs on the floor plan with the correct scale. The APs are mounted on trusses, 14 feet (4.3 meters) from the floor.

Which two actions ensure correct location accuracy in this scenario? (Choose two.)

- A. Install Virtual Beacons in each aisle.
- B. Configure the height of each AP.
- C. Determine the orientation of each AP.
- D. Disable the 2.4 GHz Wi-Fi radios to reduce interference.

Correct Answer: BC

**QUESTION 5**

Asset tracking using Mist-supported third-party BLE beacons has been installed in a warehouse. The BLE beacons

were configured using their manufacturer-supplied configuration utility and BLE was properly configured for the site settings. When the warehouse floor plan is opened in Live View, the third-party beacons are not shown.

Which two statements describe causes for this issue? (Choose two.)

- A. The Show assets check box has not been selected in Live View.
- B. Marvis was not enabled for the site.
- C. The Locate this Client as an Asset check box has not been selected at the BLE client level.
- D. The APs are installed at 19 feet from the floor, above the recommended 15 feet.

Correct Answer: AC

**QUESTION 6**

Click the Exhibit button.

The screenshot shows a 'Client Events' interface. At the top, it displays statistics: 534 Total, 435 Good, 68 Neutral, and 31 Bad. Below this is a table of events:

Event Type	Time	Date
DNS Failure	09:29:00.545 AM	Jun 22
DNS Failure	08:58:21.178 AM	Jun 22
Authorization Failure	08:35:56.200 AM	Jun 22
Authorization Failure	08:29:54.612 AM	Jun 22
DHCP Terminated	08:15:31.593 AM	Jun 22
DHCP Terminated	05:10:17.995 AM	Jun 22
Authorization Failure	05:02:14.453 AM	Jun 22
DHCP Denied	03:51:04.351 AM	Jun 22

To the right of the table is a detailed view of the selected event:

- Client:** [Redacted]
- AP:** AP43
- BSSID:** 5c:5b:35:5c:fa:f1
- RSSI:** -66 dBm
- SSID:** Mist
- Band:** 2.4 GHz
- Description:** Status code 79 "Transmission failure"

Below the details are two buttons: 'Download Packet Capture' and 'Analyze Packet Capture'.

Referring to the exhibit, which statement is correct?

- A. The packet capture was taken automatically.
- B. The packet capture was taken manually.
- C. The packet capture will contain full frames.
- D. The packet capture will contain only management frames.

Correct Answer: C

**QUESTION 7**

According to the Coverage SLE, which classifier tracks an AP that transmits at a lower data rate than a connected client?

- A. Latency

- B. Slow OKC Roam
- C. Asymmetry Downlink
- D. Device Capability

Correct Answer: B

---

#### QUESTION 8

All the access points (APs) on the site will obtain an IP address for the Management VLAN. You notice an additional IP address for each configured VLAN on the AP.

Which statement is correct in this scenario?

- A. The AP is configured to support wireless mesh.
- B. This behavior is enabled by default under the Site configuration.
- C. The Local Status Page has been enabled in the AP setting under the Site configuration.
- D. The AP MAC has a DHCP reservation.

Correct Answer: B

---

#### QUESTION 9

Which two statements correctly describe an extended service set (ESS)? (Choose two.)

- A. Each BSS within the ESS share a common BSSID.
- B. Each BSS within the ESS has its own unique BSSID.
- C. The SSID is common across all BSSs within the ESS.
- D. The SSID is unique across all BSSs within the ESS.

Correct Answer: AC

---

#### QUESTION 10

What are basic data rates?

- A. fastest data rates
- B. optional data rates
- C. required data rates
- D. disabled data rates

Correct Answer: C

**QUESTION 11**


Regarding roaming, which device determines when it is time to connect to another AP?

- A. the gateway router
- B. the client device
- C. the primary AP
- D. the current AP

Correct Answer: B

**QUESTION 12**

Click the Exhibit button.

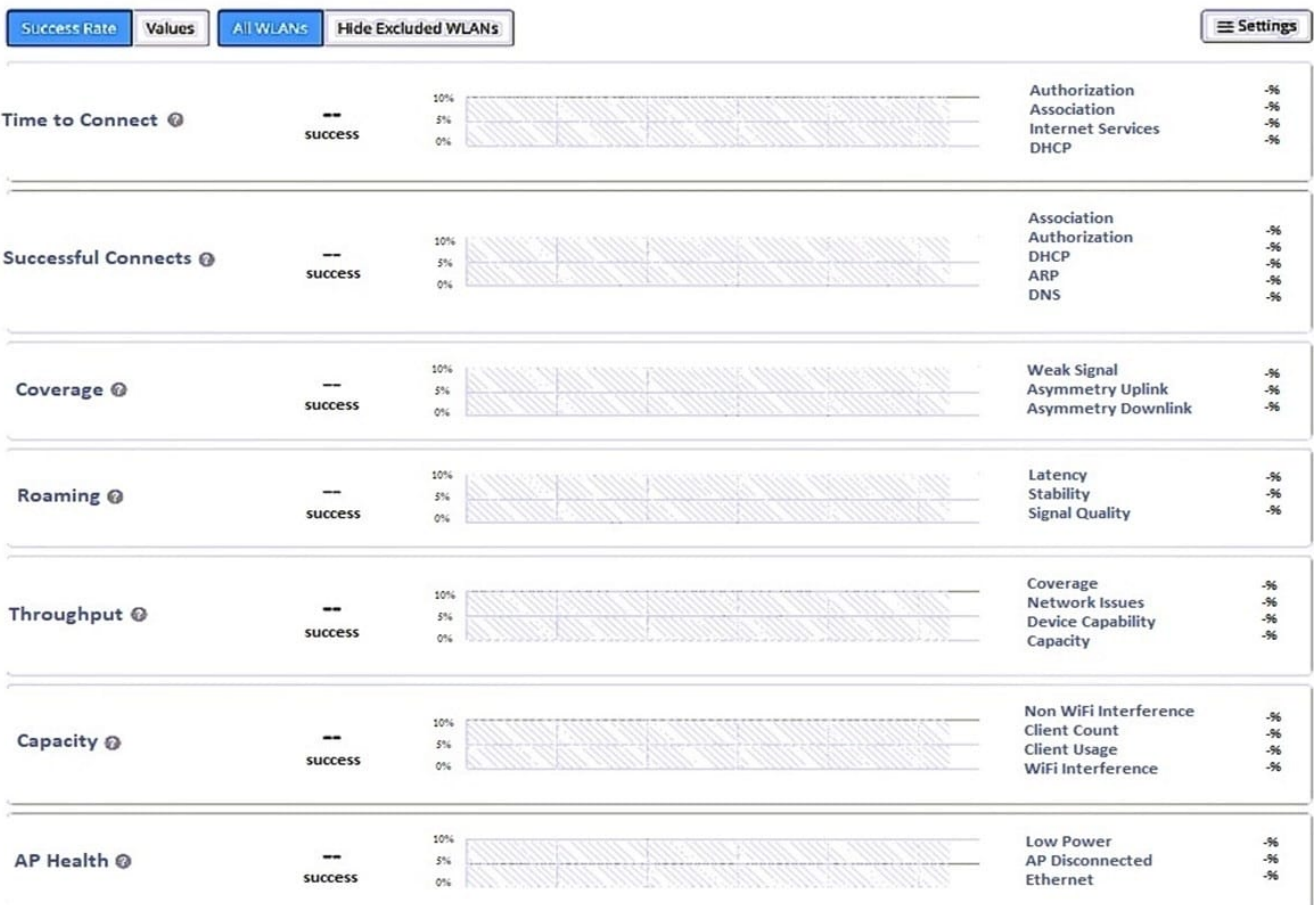

Users are occasionally having problems connecting to the Internet using Wi-Fi. You suspect possible interference from a neighboring Wi-Fi network.

Referring to the exhibit, which Wi-Fi Assurance SLE and classifier would provide information about this issue?

- A. Throughput and Network Issues
- B. Capacity and Non Wi-Fi Interference
- C. Coverage and Weak Signal
- D. Capacity and Wi-Fi Interference

Correct Answer: D

---

### QUESTION 13

You want to identify APs that are not associated with your network. However, the APs broadcast your corporate login page and WLAN name.

What does Mist use to identify APs in this scenario?

- A. a rogue AP
- B. a neighbor AP
- C. an approved AP
- D. a honeypot AP

Correct Answer: A

---

### QUESTION 14

Which Wireless Assurance SLE has classifiers of Association, Authorization, DHCP, and Internet Services?

- A. Roaming
- B. Coverage
- C. Time to Connect
- D. Capacity

Correct Answer: D

Reference: <https://www.mist.com/documentation/service-level-expectations-sle/>

---

### QUESTION 15

You are deploying three WLAN 2.4 GHz networks in your US-based site. You must ensure that each network frequency is unique and does not overlap with the other frequency channels. In this scenario, which three OFDM channels should be used? (Choose three.)

- B. 1
- C. 3
- D. 6
- E. 13

Correct Answer: ABD

[Latest JN0-451 Dumps](#)

[JN0-451 PDF Dumps](#)

[JN0-451 Study Guide](#)