

A SS OCIATE-ANDROID-DEVELOPER^{Q&As}

Google Developers Certification - Associate Android Developer (Kotlin
and Java Exam)

**Pass Google ASSOCIATE-ANDROID-DEVELOPER
Exam with 100% Guarantee**

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/associate-android-developer.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Google
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



QUESTION 1

What is a correct part of an Implicit Intent for sharing data implementation?

- A. `Intent sendIntent = new Intent(this, UploadService.class) sendIntent.putExtra(Intent.EXTRA_TEXT, textMessage);`
- B. `Intent sendIntent = new Intent(); sendIntent.setType(Intent.ACTION_SEND);`
- C. `Intent sendIntent = new Intent(this, UploadService.class) sendIntent.setData(Uri.parse(fileUrl));`
- D. `Intent sendIntent = new Intent(); sendIntent.setAction(Intent.ACTION_SEND);`

Correct Answer: D

Create the text message with a string

```
Intent sendIntent = new Intent();  
  
sendIntent.setAction(Intent.ACTION_SEND);  
  
sendIntent.putExtra(Intent.EXTRA_TEXT, textMessage);  
  
sendIntent.setType("text/plain");
```

Reference:

<https://developer.android.com/guide/components/fundamentals>

QUESTION 2

A class that you create for managing multiple data sources. In addition to a Room database, this class could manage remote data sources such as a web server. It is about:

- A. Activity/Fragment
- B. ViewModel
- C. Repository
- D. Room database

Correct Answer: C

QUESTION 3

In our TeaViewModel class, that extends ViewModel, we have such property: `val tea: LiveData`

An observer in our Activity (type of `mViewModel` variable in example is `TeaViewModel`) is set in this way:

```
mViewModel!!.tea.observe(this, Observer { tea: Tea? -> displayTea(tea) })
```

What will be a correct displayTea method definition?

- A. private fun displayTea()
- B. private fun displayTea(tea: Tea?)
- C. private fun displayTea(tea: LiveData?)
- D. private fun displayTea(tea: LiveData?)

Correct Answer: B

QUESTION 4

In application theme style, flag windowActionBar () indicates:

- A. whether the given application component is available to other applications.
- B. whether action modes should overlay window content when there is not reserved space for their UI (such as an Action Bar).
- C. whether this window's Action Bar should overlay application content.
- D. whether this window should have an Action Bar in place of the usual title bar.

Correct Answer: D

Reference:


<https://developer.android.com/guide/topics/ui/look-and-feel/themes>
<https://developer.android.com/reference/android/R.styleable.html>

QUESTION 5

DRAG DROP


In a common Paging Library architecture scheme, move instances to the correct positions.

Select and Place:

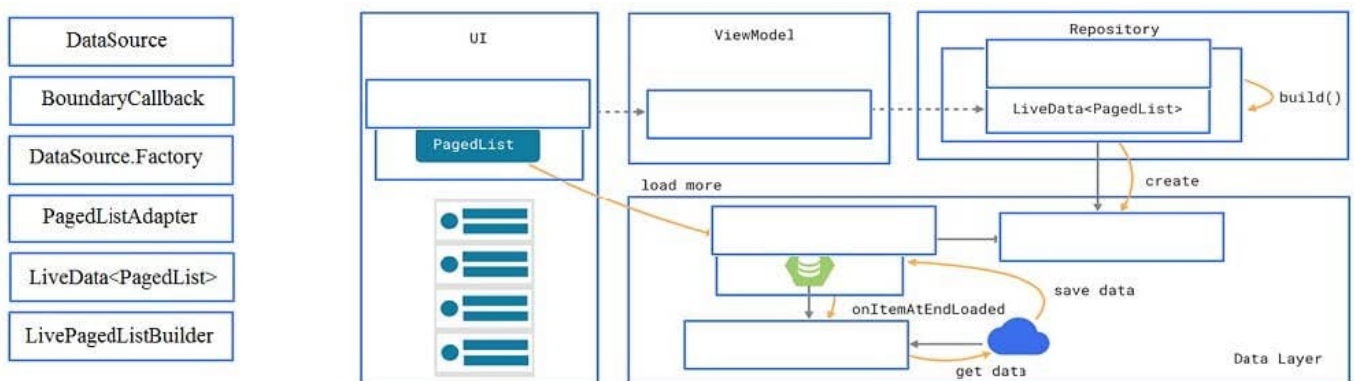

Correct Answer:

| |
|--|
| |
| |
| |
| |
| |
| |
| |
| |

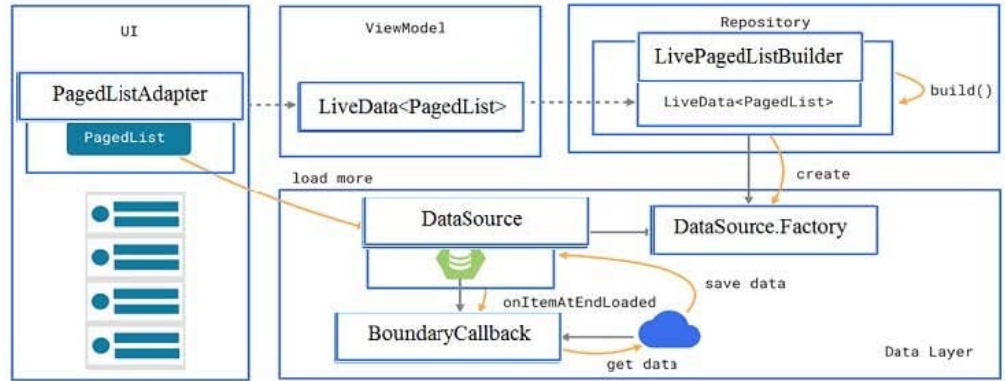

Reference: <https://developer.android.com/topic/libraries/architecture/paging/ui>

[ASSOCIATE-ANDROID-DEVELOPER Practice Test](#)

[ASSOCIATE-ANDROID-DEVELOPER Study Guide](#)

[ASSOCIATE-ANDROID-DEVELOPER Braindumps](#)