



AZ-200^{Q&As}

Microsoft Azure Developer Core Solutions (beta)

Pass Microsoft AZ-200 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4lead.com/az-200.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Microsoft
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

HOT SPOT

You need to ensure that security policies are met.

What code should you add at Line PC26?

To answer, select the appropriate options in the answer area;

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

```
var resolver = new KeyVaultKeyResolver(_keyVaultClient);  
var keyBundle = await _keyVaultClient.GetKeyAsync("...", "...");
```

var key = keyBundle.Key;
var key = keyBundle.KeyIdentifier.Identifier;
var key = await resolver.ResolveKeyAsync("encrypt", null);
var key = await resolver.ResolveKeyAsync(keyBundle.KeyIdentifier.Identifier, CancellationToken.None);

var x = keyBundle.Managed;
var x = AuthenticationScheme.SharedKey;
var x = new BlobEncryptionPolicy(key, resolver);
var x = new DeleteRetentionPolicy { Enabled = key.Kid != null

cloudBlobClient.DefaultRequestOptions.RequireEncryption = x;
cloudBlobClient.AuthenticationScheme = x;
cloudBlobClient.DefaultRequestOptions.RequireEncryption = x;
cloudBlobClient.DefaultRequestOptions.EncryptionPolicy = x;
cloudBlobClient.SetServiceProperties(new ServiceProperties(deleteRetentionPolicy: x));

Correct Answer:



Answer Area

```
var resolver = new KeyVaultKeyResolver(_keyVaultClient);
var keyBundle = await _keyVaultClient.GetKeyAsync("-", "-");

var key = keyBundle.Key;
var key = keyBundle.KeyIdentifier.Identifier;
var key = await resolver.ResolveKeyAsync("encrypt", null);
var key = await resolver.ResolveKeyAsync(keyBundle.KeyIdentifier.Identifier, Cancellation.Token.None);

var x = keyBundle.Managed;
var x = AuthenticationScheme.SharedKey;
var x = new BlobEncryptionPolicy(key, request);
var x = new DeleteRetentionPolicy { Enabled = key.Kid != null };

cloudBlobClient.DefaultRequestOptions.RequireEncryption = x;
cloudBlobClient.AuthenticationScheme = x;
cloudBlobClient.DefaultRequestOptions.RequireEncryption = x;
cloudBlobClient.DefaultRequestOptions.EncryptionPolicy = x;
cloudBlobClient.SetServiceProperties(new ServiceProperties(deleteRetentionPolicy: x));
```

Answer Area

```
var resolver = new KeyVaultKeyResolver(_keyVaultClient);
var keyBundle = await _keyVaultClient.GetKeyAsync("-", "-");

var key = keyBundle.Key;
var key = keyBundle.KeyIdentifier.Identifier;
var key = await resolver.ResolveKeyAsync("encrypt", null);
var key = await resolver.ResolveKeyAsync(keyBundle.KeyIdentifier.Identifier, Cancellation.Token.None);

var x = keyBundle.Managed;
var x = AuthenticationScheme.SharedKey;
var x = new BlobEncryptionPolicy(key, request);
var x = new DeleteRetentionPolicy { Enabled = key.Kid != null };

cloudBlobClient.DefaultRequestOptions.RequireEncryption = x;
cloudBlobClient.AuthenticationScheme = x;
cloudBlobClient.DefaultRequestOptions.RequireEncryption = x;
cloudBlobClient.DefaultRequestOptions.EncryptionPolicy = x;
cloudBlobClient.SetServiceProperties(new ServiceProperties(deleteRetentionPolicy: x));
```

QUESTION 2

You are configuring Azure Redis Cache for a production web application.

The web application and Azure Redis Cache must be able to withstand a catastrophic t configuration changes. You



create a storage account to persist cache data if needed

You need to implement a solution.

What should you do?

- A. Run the Set-AzureRmRedisCache Azure PowerShell command with the size and sku parameters and specify a connection string to the storage account.
- B. In the Azure portal, enable Redis DataBase (RDB) persistence and configure persistence settings to save cache data to the storage account.
- C. In the Azure portal, enable Append Only File (AOF) persistence and configure persistence settings to save cache data to the storage account.
- D. Run Reset-AzureRmRedisCache Azure PowerShell command with the ShardID parameter and specify a connection string to the storage account.

Correct Answer: C

QUESTION 3

You develop a serverless application using several Azure Functions. These functions connect to data from within the code.

You want to configure tracing for an Azure Function App project.

You need to change configuration settings in the hostjson file.

Which tool should you use?

- A. Azure portal
- B. Azure PowerShell
- C. Azure Functions Core Tools (Azure CLI)
- D. Visual Studio

Correct Answer: C

QUESTION 4

HOT SPOT

You have an Azure Batch project that processes and converts files and stores the files in Azure storage. You are developing a function to start the batch job.

You add the following parameters to the function:



Parameter name	Description
fileTasks	a list of tasks to be run
jobId	the identifier that must be assigned to the job
outputContainerSasUrl	a storage SAS URL to store successfully converted files
failedContainerSasUrl	a storage SAS URL to store copies of files that failed to convert.

You must ensure that converted files are placed in the container referenced by the outputContainerSasUrl parameter. Files which fail to convert are placed in the container referenced by the failedContainerSasUrt parameter.

You need to ensure the files are correctly processed.

How should you complete the code segment? To answer, select the appropriate options in the answer area;

Hot Area:



```

public List<CloudTask> StartTasks(List<FileTask> fileTasks, string jobId,
string outputContainerSasUrl, string failedContainerSasUrl)
{
    BatchSharedKeyCredentials sharedKeyCredentials =
    new BatchSharedKeyCredentials(batchAccountUrl, batchAccountName, batchAccountKey);
    List<CloudTask> tasks = new List<CloudTask>();
    using (BatchClient batchClient = BatchClient.Open(sharedKeyCredentials))
    {
        CloudJob job = batchClient.JobOperations.
        job.Id = jobId;
        job.PoolInformation = new PoolInformation(poolId);
        job.Commit();
        fileTasks.ForEach((fileTask) =>
        {
            string taskId = $"Task{DateTime.Now.ToFileTimeUtc().ToString()}";
            CloudTask task = new CloudTask(taskId, fileTask);
            List<OutputFile> outputFileList = new List<OutputFile>();
            OutputFileBlobContainerDestination outputContainer =
            new OutputFileBlobContainerDestination(outputContainerSasUrl);
            OutputFileBlobContainerDestination failedContainer =
            new OutputFileBlobContainerDestination(failedContainerSasUrl);
            outputFileList.Add(new OutputFile(fileTask.Output,
            new FileDestination(outputContainer),
            new OutputFileUploadOptions(OutputFileUploadCondition.
            outputFileList.Add(new OutputFile(fileTask.Output,
            new OutputFileDestination(failedContainer),
            new OutputFileUploadOptions(OutputFileUploadCondition.
            task.
            tasks.Add(
        });
    }
    return tasks;
}

```

www.Pass4Lead.com

- GetJob
- GetTask
- EnableJob
- CreateJob

- TaskFailure
- TaskSuccess
- TaskFailure
- TaskCompletion

- TaskSuccess
- TaskFailure
- TaskCompletion

These are the selection

Correct Answer:



```

public List<CloudTask> StartTasks(List<FileTask> fileTasks, string jobId,
string outputContainerSasUrl, string failedContainerSasUrl)
{
    BatchSharedKeyCredentials sharedKeyCredentials =
    new BatchSharedKeyCredentials(batchAccountUrl, batchAccountName, batchAccountKey);
    List<CloudTask> tasks = new List<CloudTask>();
    using (BatchClient batchClient = BatchClient.Open(sharedKeyCredentials))
    {
        CloudJob job = batchClient.JobOperations.
        job.Id = jobId;
        job.PoolInformation = new PoolInformation(poolId);
        job.Commit();
        fileTasks.ForEach((fileTask) =>
        {
            string taskId = $"Task{DateTime.Now.ToFileTimeUtc().ToString()}";
            CloudTask task = new CloudTask(taskId, fileTask.ResourceFiles);
            IList<OutputFile> outputFileList = new List<OutputFile>();
            OutputFileBlobContainerDestination outputContainer =
            new OutputFileBlobContainerDestination(outputContainerSasUrl);
            OutputFileBlobContainerDestination failedContainer =
            new OutputFileBlobContainerDestination(failedContainerSasUrl);
            outputFileList.Add(new OutputFile(fileTask.Output,
            new OutputFileDestination(outputContainer),
            new OutputFileUploadOptions(OutputFileUploadCondition.
            outputFileList.Add(new OutputFile(fileTask.Output,
            new OutputFileDestination(failedContainer),
            new OutputFileUploadOptions(OutputFileUploadCondition.
            task.
            tasks.Add(
        });
    }
    return tasks;
}

```

EnableJob TaskFailure TaskCompletionResourceFiles

QUESTION 5

HOT SPOT

You need to ensure that you can deploy the LabelMak.e application

How should you complete the CU commands? To answer, select the appropriate options in the answer area;

NOTE: Each correct selection is worth one point.

Hot Area:



To Read the [Whole Q&As](#), please purchase the [Complete Version](#) from [Our website](#).

Try our product !

100% Guaranteed Success

100% Money Back Guarantee

365 Days Free Update

Instant Download After Purchase

24x7 Customer Support

Average 99.9% Success Rate

More than 800,000 Satisfied Customers Worldwide

Multi-Platform capabilities - [Windows](#), [Mac](#), [Android](#), [iPhone](#), [iPod](#), [iPad](#), [Kindle](#)


We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications. You can view Vendor list of All Certification Exams offered:

<https://www.pass4lead.com/allproducts>

Need Help

Please provide as much detail as possible so we can best assist you.

To update a previously submitted ticket:

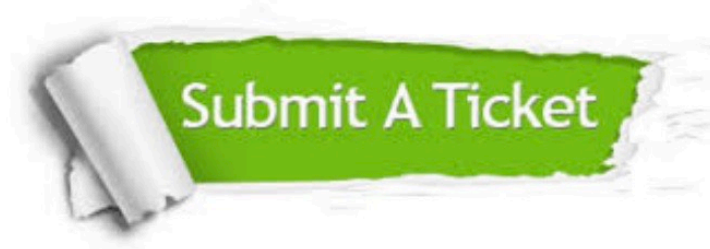

 <p>One Year Free Update Free update is available within One Year after your purchase. After One Year, you will get 50% discounts for updating. And we are proud to boast a 24/7 efficient Customer Support system via Email.</p>	 <p>Money Back Guarantee To ensure that you are spending on quality products, we provide 100% money back guarantee for 30 days from the date of purchase.</p>	 <p>Security & Privacy We respect customer privacy. We use McAfee's security service to provide you with utmost security for your personal information & peace of mind.</p>
---	---	--

Any charges made through this site will appear as Global Simulators Limited.

All trademarks are the property of their respective owners.

Copyright © pass4lead, All Rights Reserved.