

CKAD^{Q&As}

Certified Kubernetes Application Developer (CKAD) Program

Pass Linux Foundation CKAD Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/ckad.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Linux Foundation Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



QUESTION 1

CORRECT TEXT

No configuration context change is required for this task.

Task:

A Dockerfile has been prepared at `~/humane-stork/build/Dockerfile`

Multiple image builders and tools have been pre-installed in the base system, including: `docker`, `skopeo`, `buildah`, `img`, and `podman`.

Please do **not** push the built image to a registry, run a container, or otherwise consume it.

A. Please check explanations

B. Place Holder

Correct Answer: A

```
candidate@node-1:~$ cd humane-stork/build/
candidate@node-1:~/humane-stork/build$ ls -l
total 16
-rw-r--r-- 1 candidate candidate 201 Sep 24 04:21 Dockerfile
-rw-r--r-- 1 candidate candidate 644 Sep 24 04:21 text1.html
-rw-r--r-- 1 candidate candidate 813 Sep 24 04:21 text2.html
-rw-r--r-- 1 candidate candidate 383 Sep 24 04:21 text3.html
candidate@node-1:~/humane-stork/build$ sudo docker build -t macaque:3.0 .
Sending build context to Docker daemon 6.144kB
Step 1/5 : FROM docker.io/lfccncf/nginx:mainline
--> ea335eeal7ab
Step 2/5 : ADD text1.html /usr/share/nginx/html/
--> 8967ee9ee5d0
Step 3/5 : ADD text2.html /usr/share/nginx/html/
--> cb0554422f26
Step 4/5 : ADD text3.html /usr/share/nginx/html/
--> 62e879ab821e
Step 5/5 : COPY text2.html /usr/share/nginx/html/index.html
--> 331c8a94372c
Successfully built 331c8a94372c
Successfully tagged macaque:3.0
candidate@node-1:~/humane-stork/build$ sudo docker save macaque:3.0 > ~/humane-stork/macaque-3.0.tar
candidate@node-1:~/humane-stork/build$ cd ..
candidate@node-1:~/humane-stork$ ls -l
total 142532
drwxr-xr-x 2 candidate candidate 4096 Sep 24 04:21 build
-rw-rw-r-- 1 candidate candidate 145948672 Sep 24 11:39 macaque-3.0.tar
candidate@node-1:~/humane-stork$
```

QUESTION 2

CORRECT TEXT



Context

It is always useful to look at the resources your applications are consuming in a cluster.

Task

From the pods running in namespace cpu-stress, write the name only of the pod that is consuming the most CPU to file /opt/KDOBG030/pod.txt, which has already been created.

- A. Please check explanations
- B. Place Holder

Correct Answer: A

QUESTION 3

CORRECT TEXT



Context

Your application's namespace requires a specific service account to be used.

Task


Update the app-a deployment in the production namespace to run as the restrictedservice service account.

The service account has already been created.

A. Please check explanations

B. Place Holder

Correct Answer: A

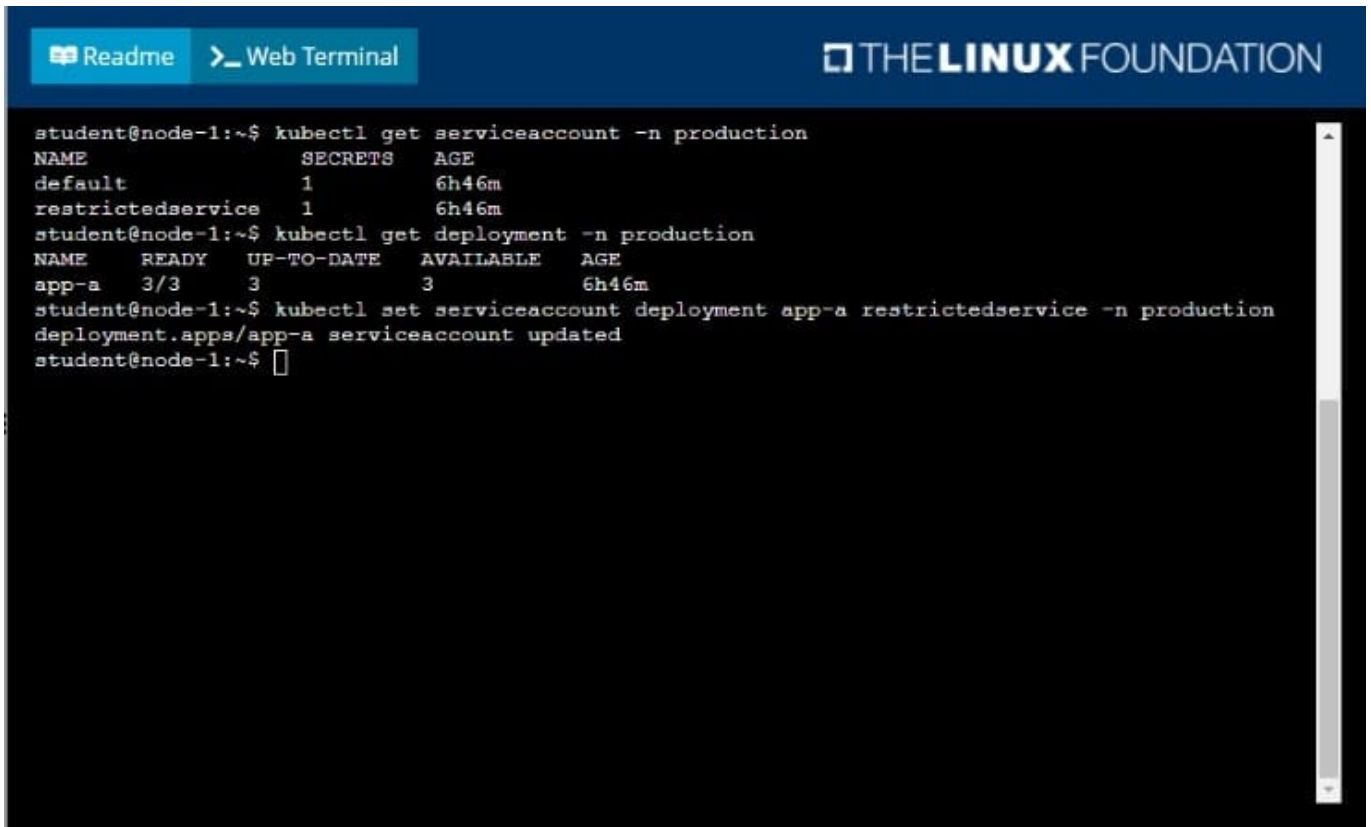

```
student@node-1:~$ kubectl get serviceaccount -n production
NAME          SECRETS  AGE
default       1        6h46m
restrictedservice 1        6h46m
student@node-1:~$ kubectl get deployment -n production
NAME          READY   UP-TO-DATE   AVAILABLE   AGE
app-a         3/3     3            3           6h46m
student@node-1:~$ kubectl set serviceaccount deployment app-a restrictedservice -n production
deployment.apps/app-a serviceaccount updated
student@node-1:~$
```

QUESTION 4

CORRECT TEXT



Context

You sometimes need to observe a pod's logs, and write those logs to a file for further analysis.

Task

Please complete the following;

1.
Deploy the counter pod to the cluster using the provided YAMLSpec file at /opt/KDOB00201/counter.yaml

2.
Retrieve all currently available application logs from the running pod and store them in the file /opt/KDOB00201/log_Output.txt, which has already been created

A. Please check explanations

B. Place Holder

Correct Answer: A

```
student@node-1:~$ kubectl create -f /opt/KDOB00201/counter.yaml
pod/counter created
student@node-1:~$ kubectl get pods
NAME          READY   STATUS    RESTARTS   AGE
counter       1/1     Running   0           10s
liveness-http 1/1     Running   0           6h45m
nginx-101     1/1     Running   0           6h46m
nginx-configmap 1/1     Running   0           107s
nginx-secret  1/1     Running   0           7m21s
poller        1/1     Running   0           6h46m
student@node-1:~$ kubectl logs counter
1: 2b305101817ae25ca60ae46510fb6d11
2: 3648cf2eae95ab680dba8f195f891af4
3: 65c8bbd4dbf70bf81f2a0984a3a44ede
4: 40d3a9c8e46f5533bb4828fbc5c8d038
5: 390442d2530a90c3602901e3fe999ac8
6: b71d95187417e139effb33af77681040
7: 66a8e55a6491e756d2d0549ad6ab90a7
8: ff2b3d583b64125d2f9129c443bb37ff
9: b6c6a12b6e77944ed8baaaf6c242dae4
10: bfcc9a894a0604fc4b814b37d0a200a4
student@node-1:~$ kubectl logs counter > /opt/KDOB00201/log_output.txt
student@node-1:~$
```

```
student@node-1:~$ kubectl logs counter > /opt/KDOB00201/log_output.txt
student@node-1:~$ kubectl logs counter > /opt/KDOB00201/log_output.txt
student@node-1:~$ cd /opt/KDOB00201/log_output.txt
```

Readme Web Terminal

THE LINUX FOUNDATION

```
student@node-1:~$ kubectl logs counter > /opt/KDOB00201/log_output.txt
student@node-1:~$ cat /opt/KDOB00201/log_output.txt
1: 2b305101817ae25ca60ae46510fb6d11
2: 3648cf2eae95ab680dba8f195f891af4
3: 65c8bbd4dbf70bf81f2a0984a3a44ede
4: 40d3a9c8e46f5533bb4828fbc5c8d038
5: 390442d2530a90c3602901e3fe999ac8
6: b71d95187417e139effb33af77681040
7: 66a8e55a6491e756d2d0549ad6ab90a7
8: ff2b3d583b64125d2f9129c443bb37ff
9: b6c6a12b6e77944ed8baaaf6c242dae4
10: bfcc9a894a0604fc4b814b37d0a200a4
11: 5493cd16a1790a5fb9512b0c9d4c5dd1
12: 03f169e93e6143438e6dfe4ecb3cc9ed
13: 764b37fe611373c42d0b47154041f6eb
14: 1a56fbc1896b0ee6394136166281839e
15: ecc492eb17715de090c47345a98d98d3
16: 7974a6bec0fb44b6b8bbfc71aa3fbc74
17: 9ae01bef01748b12cc9f97a5f9f72cd6
18: 23fb22ee34d4272e4c9e005f1774515f
19: ec7e1a5d314da9a0ad45d53be5a7acae
20: 0bccdd8ee02cd42029e8162cd1c1197c
21: d6851ea43546216b95bcb81ced997102
22: 7ed9a38ea8bf0d86206569481442af44
23: 29b8416ddc63dbfcb987ab3c8198e9fe
24: 1f2062001df51a108ab25010f506716f
student@node-1:~$
```

QUESTION 5

CORRECT TEXT



Task

You are required to create a pod that requests a certain amount of CPU and memory, so it gets scheduled to a node that has those resources available.

1.

Create a pod named nginx-resources in the pod-resources namespace that requests a minimum of 200m CPU and 1Gi memory for its container

2.

The pod should use the nginx image


3.

The pod-resources namespace has already been created

A. Please check explanations

B. Place Holder

Correct Answer: A

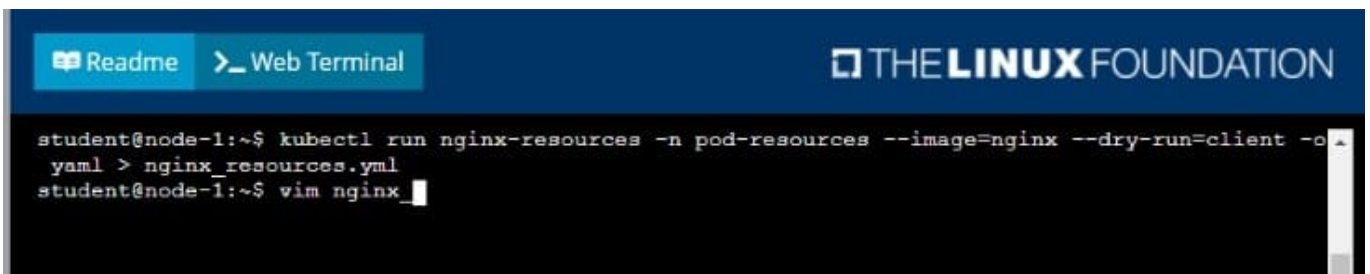


```
student@node-1:~$ kubectl run nginx-resources -n pod-resources --image=nginx --dry-run=client -o
yaml > nginx_resources.yml
student@node-1:~$ vim nginx_resources.yml
student@node-1:~$ kubectl create -g nginx_resources.yml
Error: unknown shorthand flag: 'g' in -g
See 'kubectl create --help' for usage.
student@node-1:~$ kubectl create -f nginx_resources.yml
pod/nginx-resources created
student@node-1:~$ kubectl get pods -n pod-ra
```

```
student@node-1:~$ kubectl get pods -n pod-resources
NAME          READY   STATUS    RESTARTS   AGE
nginx-resources 1/1     Running   0           8s
student@node-1:~$
```

[Latest CKAD Dumps](#)

[CKAD Study Guide](#)

[CKAD Exam Questions](#)