

# CKAD<sup>Q&As</sup>

Certified Kubernetes Application Developer (CKAD) Program

## Pass Linux Foundation CKAD Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/ckad.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Linux Foundation Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



**QUESTION 1**

CORRECT TEXT



Task

A deployment is failing on the cluster due to an incorrect image being specified. Locate the deployment, and fix the problem.

- A. Please check explanations
- B. Place Holder

Correct Answer: A

create deploy hello-deploy --image=nginx --dry-run=client -o yaml > hello-deploy.yaml Update deployment image to nginx:1.17.4: kubectl set image deploy/hello-deploy nginx=nginx:1.17.4

---

**QUESTION 2**

CORRECT TEXT



### Context

As a Kubernetes application developer you will often find yourself needing to update a running application.


### Task

Please complete the following:

1.  
Update the app deployment in the kdpd00202 namespace with a maxSurge of 5% and a maxUnavailable of 2%
2.  
Perform a rolling update of the web1 deployment, changing the lfcncf/ngmx image version to 1.13
3.  
Roll back the app deployment to the previous version

- A. Please check explanations
- B. Place Holder

Correct Answer: A

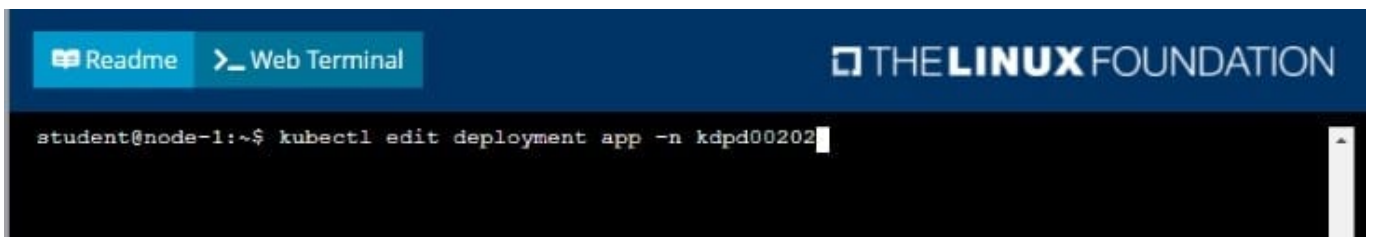


```
Readme Web Terminal THE LINUX FOUNDATION
uid: 1dfa2527-5c61-46a9-8dd3-e24643d3ce14
spec:
  progressDeadlineSeconds: 600
  replicas: 10
  revisionHistoryLimit: 10
  selector:
    matchLabels:
      app: nginx
  strategy:
    rollingUpdate:
      maxSurge: 5%
      maxUnavailable: 2
    type: RollingUpdate
  template:
    metadata:
      creationTimestamp: null
      labels:
        app: nginx
    spec:
      containers:
      - image: lfccncf/nginx:1.13
        imagePullPolicy: IfNotPresent
        name: nginx
        ports:
        - containerPort: 80
          protocol: TCP
:wq!
```

```
Readme Web Terminal THE LINUX FOUNDATION
student@node-1:~$ kubectl edit deployment app -n kdpd00202
deployment.apps/app edited
student@node-1:~$ kubectl rollout status deployment app -n kdpd00202
Waiting for deployment "app" rollout to finish: 6 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 7 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 7 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 7 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 8 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 8 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 8 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 8 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 9 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 9 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 9 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 9 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 1 old replicas are pending termination...
Waiting for deployment "app" rollout to finish: 8 of 10 updated replicas are available...
Waiting for deployment "app" rollout to finish: 9 of 10 updated replicas are available...
deployment "app" successfully rolled out
student@node-1:~$ kubectl rollout undo deployment app -n kdpd00202
deployment.apps/app rolled back
student@node-1:~$ kubectl rollout status deployment app -n kdpd00202
```

```
student@node-1:~$ kubectl rollout status deployment app -n kdpd00202
Waiting for deployment "app" rollout to finish: 6 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 6 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 6 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 7 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 7 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 9 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 9 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 9 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 1 old replicas are pending termination...
Waiting for deployment "app" rollout to finish: 1 old replicas are pending termination...
Waiting for deployment "app" rollout to finish: 1 old replicas are pending termination...
Waiting for deployment "app" rollout to finish: 8 of 10 updated replicas are available...
Waiting for deployment "app" rollout to finish: 9 of 10 updated replicas are available...
deployment "app" successfully rolled out
student@node-1:~$
```

**QUESTION 3**

**CORRECT TEXT**

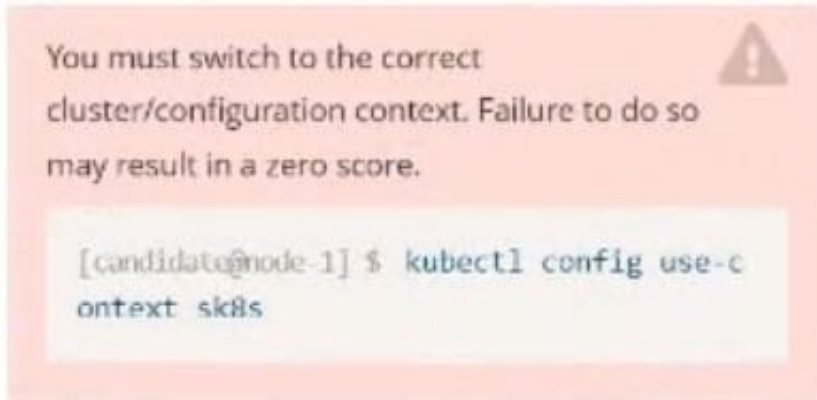

Task:

Modify the existing Deployment named broker-deployment running in namespace quetzal so that its containers.

The broker-deployment is manifest file can be found at:

```
~/daring_mocasin/broker-deployment.yaml
```

- A. Please check explanations
- B. Place Holder

Correct Answer: A



```
candidate@node-1:~$ kubectl config use-context k8s
Switched to context "k8s".
candidate@node-1:~$ vim
```

```
File Edit View Terminal Tabs Help
```

```
containers:
- name: broker
  image: redis:alpine
  ports:
  - containerPort: 6379
  securityContext:
    runAsUser: 30000
    privileged: false
```

```
:wq
```

```
candidate@node-1:~$ kubectl config use-context k8s
Switched to context "k8s".
candidate@node-1:~$ vim ~/daring-moccasin/broker-deployment.yaml
candidate@node-1:~$ kubectl apply -f ~/daring-moccasin/broker-deployment.yaml
deployment.apps/broker-deployment configured
candidate@node-1:~$ kubectl get pods -n quetzal
NAME                                READY   STATUS    RESTARTS   AGE
broker-deployment-65446d6d94-868p6  1/1     Running   0           30s
broker-deployment-65446d6d94-8dn7l  1/1     Running   0           32s
broker-deployment-65446d6d94-p4h4l  1/1     Running   0           31s
candidate@node-1:~$ kubectl get deploy -n quetzal
NAME                READY   UP-TO-DATE   AVAILABLE   AGE
broker-deployment  3/3     3             3           7h3m
candidate@node-1:~$
```

#### QUESTION 4

CORRECT TEXT



Context

It is always useful to look at the resources your applications are consuming in a cluster.

Task


From the pods running in namespace cpu-stress, write the name only of the pod that is consuming the most CPU to file /opt/KDOBG030/pod.txt, which has already been created.

- A. Please check explanations
- B. Place Holder

Correct Answer: A

## QUESTION 5

CORRECT TEXT

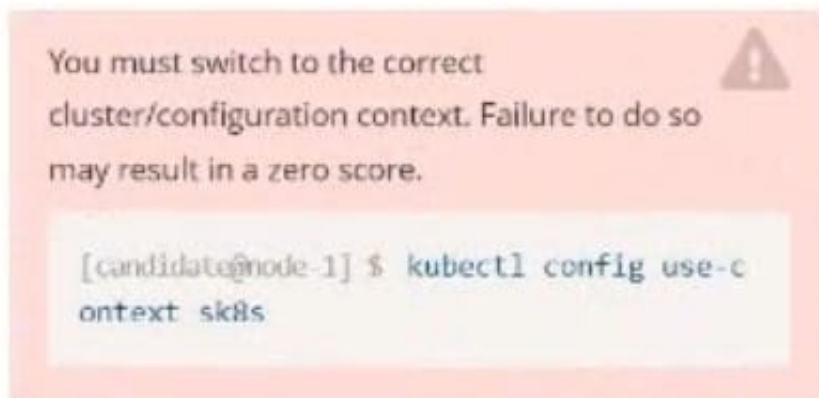

Task: Create a Deployment named expose in the existing ckad00014 namespace running 6 replicas of a Pod. Specify a single container using the ifccncf/nginx: 1.13.7 image Add an environment variable named NGINX\_PORT with the value 8001 to the container then expose port 8001

A. Please check explanations

B. Place Holder

Correct Answer: A

```
candidate@node-1:~$ kubectl config use-context k8s
Switched to context "k8s".
candidate@node-1:~$ kubectl create deploy expose -n ckad00014 --image lfccnct/nginx:1.13.7 --dry-run=client -o yaml > d
ep.yaml
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$
```



```
File Edit View Terminal Tabs Help
apiVersion: apps/v1
kind: Deployment
metadata:
  creationTimestamp: null
  labels:
    app: expose
  name: expose
  namespace: ckad00014
spec:
  replicas: 6
  selector:
    matchLabels:
      app: expose
  strategy: {}
  template:
    metadata:
      creationTimestamp: null
      labels:
        app: expose
    spec:
      containers:
      - image: lfccncf/nginx:1.13.7
        name: nginx
        ports:
        - containerPort: 8001
        env:
        - name: NGINX_PORT
          value: "8001"
```

```
File Edit View Terminal Tabs Help
candidate@node-1:~$ kubectl config use-context k8s
Switched to context "k8s".
candidate@node-1:~$ kubectl create deploy expose -n ckad00014 --image lfccncf/nginx:1.13.7 --dry-run=client -o yaml > dep.yaml
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$ vim dep.yaml
candidate@node-1:~$ kubectl create -f dep.yaml
deployment.apps/expose created
candidate@node-1:~$ kubectl get pods -n ckad00014
NAME                                READY   STATUS              RESTARTS   AGE
expose-85dd99d4d9-25675             0/1     ContainerCreating   0           6s
expose-85dd99d4d9-4fhcc             0/1     ContainerCreating   0           6s
expose-85dd99d4d9-fl7j             0/1     ContainerCreating   0           6s
expose-85dd99d4d9-tt6rm            0/1     ContainerCreating   0           6s
expose-85dd99d4d9-vjd8b            0/1     ContainerCreating   0           6s
expose-85dd99d4d9-vtzpq            0/1     ContainerCreating   0           6s
candidate@node-1:~$ kubectl get deploy -n ckad00014
NAME    READY   UP-TO-DATE   AVAILABLE   AGE
expose  6/6     6            6           15s
candidate@node-1:~$
```

[CKAD PDF Dumps](#)

[CKAD Practice Test](#)

[CKAD Exam Questions](#)