

OMNISTUDIO-DEVELOPER^{Q&As}

Salesforce Certified OmniStudio Developer

Pass Salesforce OMNISTUDIO-DEVELOPER Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/omnistudio-developer.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Salesforce
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



QUESTION 1

A developer is troubleshooting an Integration Procedure with two elements: A Remote Action named FetchCart and a Response Action named ResponseCart. In Preview, what JSON node shows the data sent to the Response Action?

- A. FetchCart
- B. Response
- C. ResponseCartDebug
- D. ResponseCart

Correct Answer: D

QUESTION 2

A developer builds a new OmniScript. It contains a Set Values element with a ContextId key/value pair that was used during testing.

What should the developer do before moving the OmniScript to a production org?

- A. Update the ContextId value to specify an id from the Production org.
- B. Add a Show/Hide condition on the Set Values element.
- C. Delete or Deactivate the Set Values element.
- D. Deactivate the contextId key/value pair

Correct Answer: C

QUESTION 3


A developer is creating an OmniScript that Provisions trial orgs to their customers. The following text block in the OmniScript uses a merge code to display the ID for the new trial org:

Welcome to Salesforce

Your ID is %Details: Customer10:ID%

During testing, the developer notices that the ID does not display. The data JSON is structured as shown below.

How should the developer correct the merge code in order for the ID to display?

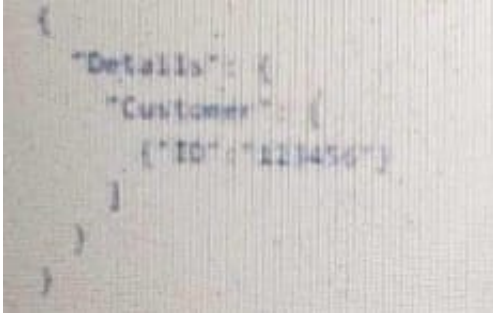

- A. To %%Details:Customer|0:ID%%
- B. To %%Details:Customer|n:ID%
- C. To %%Details:Customer|1:ID%
- D. To \$Details:Customer|0:ID\$

Correct Answer: C

QUESTION 4

A developer is configuring the API URL in an HTTP Action element within an Integration procedure.

What is the merge code syntax for passing a Date node from an element named SetValue in the URL?

- A. x%SetValue.Date%
- B. (^ SetValue\|) [^Date\|]
- C. %SetValue Date
- D. {(SetValue. Date)}

Correct Answer: A

QUESTION 5

Why would a developer clone an Integration Procedure instead of versioning it?

- A. The new Integration Procedure uses a Cache Block.
- B. The new Integration Procedure it replacing stub data.
- C. The new Integration Procedure will be used independently
- D. The new Integration Procedure is Chainable.

Correct Answer: C

[OMNISTUDIO-
DEVELOPER PDF Dumps](#)

[OMNISTUDIO-
DEVELOPER VCE Dumps](#)

[OMNISTUDIO-
DEVELOPER Exam
Questions](#)