



AD0-E103^{Q&As}

Adobe Experience Manager Developer

Pass Adobe AD0-E103 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4lead.com/ad0-e103.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Adobe
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



**QUESTION 1**

A developer wants to extend AEM Core Components to create a custom Carousel Component. How should the developer extend the Core Components?

- A. Make changes to the original component and assign a component group.
- B. Use the sling:resourceSuperType property to point to the core component.
- C. Use the sling:resourceType property to point to the core component.
- D. Copy the Core Carousel component to /apps/ folder.

Correct Answer: D

QUESTION 2

A developer is creating templates and/or components using CRXDE Lite. The developer needs to check the files into source control. Which tool should the developer use to achieve this goal?

- A. vlt command
- B. Content Explorer
- C. <http://localhost:4502/crx/checkout>
- D. mvn command

Correct Answer: A

Reference: <https://docs.adobe.com/content/help/en/experience-manager-64/developing/devtools/ht-vlttool.html>

QUESTION 3

A developer is creating a custom component that shows a list of pages. For each page, the following items must be shown:

Title of the page

Description of the page

A button with fixed text "Read more" that must be translatable

All of the above fields must be wrapped in a tag.

The logic for obtaining the list of pages must be reusable for future components.

Which snippet should the developer use to meet these requirements?



- A.
- ```
<sly data-sly-use.model="com.example.Component"/>
<div data-sly-list="{model.pages}">
 <p>${item.title}</p>
 <p>${item.description}</p>
 ${"Read more" @ .translate} <a>
</div>
```
- B.
- ```
<sly data-sly-load.model="com.example.Component"/>
<div data-sly-list.page="{model.pages}">
  <p>${page.title}</p>
  <p>${page.description}</p>
  <a href= "${page.link}">${"Read more" @ i18n} <a>
</div>
```
- C.
- ```
<sly data-sly-use.model="com.example.Component"/>
<div data-sly-list="{model.pages}">
 <p>${item.title}</p>
 <p>${item.description}</p>
 ${"Read more" @ .i18n} <a>
</div>
```
- D.
- ```
<sly data-sly-use.model="com.example.Component"/>
<div data-sly-list="{model.pages}">
  <p>${model.title}</p>
  <p>${model.description}</p>
  <a href= "${item.link}">${"Read more" @ .translate} <a>
</div>
```

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: B

QUESTION 4

How should a developer enable remote debugging of an AEM server without modifying the AEM start script?



- A. Enable the remote debugging service through the AEM Cloud Services menu.
- B. Rename the quickstart jar file to include the additional debug settings.
- C. Enable the remote debugging service through the AEM Web Console.
- D. Include an additional JVM parameter when starting AEM with java -jar.

Correct Answer: B

Reference: <http://aempodcast.com/2013/aem-resources/remote-debugging-aem-projects-using-intellij-or-netbeans/#.XeKArVpR2kw>

QUESTION 5

A developer creates a custom component. The component dialog includes the following two fields:

```
text
- jcr:primaryType="nt:unstructured"
- sling:resourceType="granite/ui/components/coral/foundation/form/textarea"
- fieldlabel="Text"
- name="./text"

charLimit
- jcr:primaryType="nt:unstructured"
- sling:resourceType="granite/ui/components/coral/foundation/form/numberfield"
- defaultValue="0"
- fieldlabel="Character Limit"
- name"./charLimit"
```

The component should display the first `X` characters of the text entered in the `text` input where `X` is the number entered in the `charLimit` input. If zero, or no value, is entered in the `charLimit` input then the text should be unaltered. The developer creates the following Sling Model to perform the truncation:



```
java
@Model(adaptables = SlingHttpServletRequest.class, defaultInjectionStrategy = DefaultInjectionStrategy.OPTIONAL)
public class Truncation {

    @ValueMapValue
    private String text;

    @ValueMapValue
    private Integer charLimit;

    @PostMapValue
    private void init() {
        if (text != null && 0 < charLimit && charLimit < text.length()) {
            text = text.substring(0, charLimit);
        }
    }
    public String getText() {
        return text;
    }
}
```

A Null Pointer Exception occurs if NO charLimit values is set in the component dialog. What should the developer do to resolve this issue?

- A. Replace the defaultValue="0" attribute of the `charLimit` field in the dialog with min="0".
- B. Add the @Default annotation to the `charLimit` variable in the Sling Model.
- C. Replace the defaultValue="0" attribute of the charLimit field in the dialog with defaultValue="{Long}0".
- D. Change the defaultInjectionStrategy of the Truncation Sling Model to DefaultInjectionStrategy.REQUIRED.

Correct Answer: D

QUESTION 6

A developer needs an existing workflow to run only when pages are created under a certain folder?

What should the developer create to achieve this?

- A. A Launcher with the field exclude that has the value !jcr:nodetype==cq:Page.
- B. A Launcher with the field path pointing to the folder and nodetype field have the value cq:Page.
- C. A Launcher with the field path pointing to the folder and condition field and have the value jcr:content/jcr:primaryType==cq:Page.
- D. A Launcher with the field condition that has the value jcr:content/page.

Correct Answer: C

QUESTION 7



An application contains an OSGi configuration that contains a password.

How should a developer prevent this sensitive information from being stored in plain text in JCR?

A. 1. Use console at /system/console/crypto to encrypt the value.

2.

Either create an encrypted value for each AEM instance and use runmodes to apply the different values or make sure relevant instances share the same master key.

3.

When loading the value in the code, call `CryptoSupport.unprotect(...)` before using the value.

B. 1. Use console at /system/console/configMgr and tick the checkbox "encrypt" before saving a configuration.

2.

Use encrypted values work across all instances.

3.

When loading the value in the code, call `CryptoSupport.unprotect(...)` before using the value.

C. 1. Use console at /system/console/ configMgr and tick the checkbox "encrypt" before saving a configuration.

2.

Either create an encrypted value for each AEM instance and use runmodes to apply the different values or make sure relevant instances share the same master key.

3.

Sensitive information is automatically decrypted using the `CryptoSupport` OSGi service before the value is returned.

D. 1. Use console at /system/console/crypto to encrypt the value.

2.

Either create an encrypted value for each AEM instance and use runmodes to apply the different values or make sure relevant instances share the same master key.

3.

Sensitive information is automatically decrypted using the `CryptoSupport` OSGi service before the value is returned.

Correct Answer: A

QUESTION 8

The structure section of an editable template has a locked component.

What happens to the content of that component when a developer unlocks it?



- A. The content stays in the same place but it ignored on pages using the template.
- B. The content is moved to the initial section of the editable template.
- C. The content is deleted after confirmation from the template author.
- D. The content is copied to the initial section of the editable template.

Correct Answer: B

Reference: <https://helpx.adobe.com/experience-manager/6-3/sites/developing/using/page-templates-editable.html>

QUESTION 9

A developer determines that the dispatcher is NOT refreshing the cached page `/content/sampleproject/sample.html` after it is updated. The dispatcher.any contains the following entries: Refer to the `$DOCROOT` directory below:

```
/cache
{
  /docroot "/opt/dispatcher/cache"
  /statfile "/tmp/dispatcher-website.stat"
  /statfileslevel "2"

  /rules
  {
    /0000 {/glob "*" /type "allow"}
  }

  /invalidate
  {
    /0000 {/glob "*" /type "deny"}
  }
}
```

```
[user@group /opt/dispatcher/cache]$ ls -la
total 2
drwxr-xr-x. 5 apache apache 4096 Feb 11 11:41 .
drwxr-xr-x. 3 apache apache 4096 Nov 29 16:07 ..
drw-r--r--. 4 root root 4096 Feb 7 03:21 content
-rw-r--r--. 1 apache apache 0 Feb 7 03:19 .stat
```



The dispatcher needs to cache the page and refresh it after it gets updated. What action should the developer take to meet these requirements?

- A. Remove /statfile or /statfileslevel.
- B. Delete the contents of the DOCROOT directory.
- C. Change the value of the entry /statfileslevel to "3".
- D. Add the entry /0001 { /glob "-.html" /type "allow" } in the /invalidate section.

Correct Answer: D

QUESTION 10

A developer is creating a custom component on the page /latestBlogs.html that needs to list all the titles of the blogs pages under /content/blogs. How does this component get the list of child pages?

- A. Instantiate a node object with `session.getNode(/content/blogs)` and then iterate through the child nodes and print the title for each.
- B. Use `PageManager.getPage("/content/blogs")` of the static `PageManager` class to instantiate a `Page` object and then iterate through the child pages and print the title for each.
- C. Use the `QueryDebugger` to look for all children of `/content/blogs` and then iterate through the result set and print the title for each.
- D. Adapt the `resourceResolver` to the `PageManager` service, then use the `getPage(/content/blogs)` to instantiate a `Page` object and then iterate through the child pages and print the title for each.

Correct Answer: B

Reference: <https://helpx.adobe.com/experience-manager/6-2/sites/developing/using/reference-materials/javadoc/com/day/cq/wcm/api/PageManager.html>

QUESTION 11

From which AEM Web Console should a developer access and download full AEM Log Files?

- A. Web Console -> System Information
- B. Status -> Log files
- C. OSGI -> Sing Log Service
- D. AEM -> Log files

Correct Answer: C

Reference: <https://helpx.adobe.com/aem-forms/kb/getting-log-files-directly-from-aem.html>



QUESTION 12

A developer needs to install a content package on AEM environment. However, a content package with the same name is already installed.

What would you be the safest way for the developer to install the content package to make sure only the changes of the new content package get applied?

- A. Use the "Force Upload option when uploading the new content package.
- B. Uninstall the existing content package before installing the new content package.
- C. Upload the content package to the CRX Package Share before installing it.
- D. Install the content package using the OSGi web console.

Correct Answer: D

Reference: <https://helpx.adobe.com/experience-manager/6-3/sites/administering/using/package-manager.html>

[AD0-E103 PDF Dumps](#)

[AD0-E103 VCE Dumps](#)

[AD0-E103 Exam Questions](#)



To Read the [Whole Q&As](#), please purchase the [Complete Version](#) from [Our website](#).

Try our product !

100% Guaranteed Success

100% Money Back Guarantee

365 Days Free Update

Instant Download After Purchase

24x7 Customer Support

Average 99.9% Success Rate

More than 800,000 Satisfied Customers Worldwide

Multi-Platform capabilities - [Windows](#), [Mac](#), [Android](#), [iPhone](#), [iPod](#), [iPad](#), [Kindle](#)


We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications. You can view Vendor list of All Certification Exams offered:

<https://www.pass4lead.com/allproducts>

Need Help

Please provide as much detail as possible so we can best assist you.

To update a previously submitted ticket:

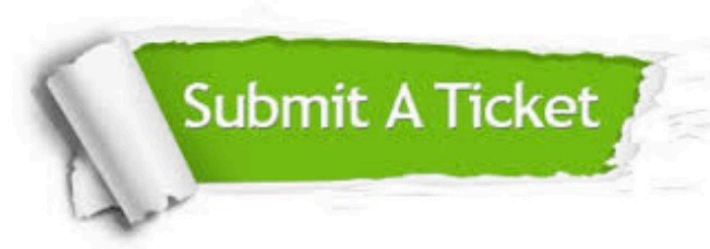

 <p>One Year Free Update Free update is available within One Year after your purchase. After One Year, you will get 50% discounts for updating. And we are proud to boast a 24/7 efficient Customer Support system via Email.</p>	 <p>Money Back Guarantee To ensure that you are spending on quality products, we provide 100% money back guarantee for 30 days from the date of purchase.</p>	 <p>Security & Privacy We respect customer privacy. We use McAfee's security service to provide you with utmost security for your personal information & peace of mind.</p>
---	---	--

Any charges made through this site will appear as Global Simulators Limited.

All trademarks are the property of their respective owners.

Copyright © pass4lead, All Rights Reserved.