

HPE6-A81^{Q&As}

Aruba Certified ClearPass Expert Written Exam

Pass HP HPE6-A81 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/hpe6-a81.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1


A customer is complaining that some of the devices, in their manufacturing network, are not getting profiled while other IoT devices from the same subnet have been correctly profiled. The network switches have been configured for DHCP IP helpers and IF-MAP has been configured on the Aruba Controllers. What can the customer do to discover those devices as well? (Select two.)

- A. Update the Fingerprints Dictionary to the latest in case new devices have been added.
- B. Open a TAC case to help you troubleshoot the DHCP device profile functionality.
- C. Add the ClearPass Server IP as an IP helper address on the default gateway as well.
- D. Allow time for IF-MAP service on the controller to discover the new devices as well.
- E. Manually create a new device fingerprint for the devices that are not being profiled.

Correct Answer: DE

QUESTION 2

Refer to the exhibit:

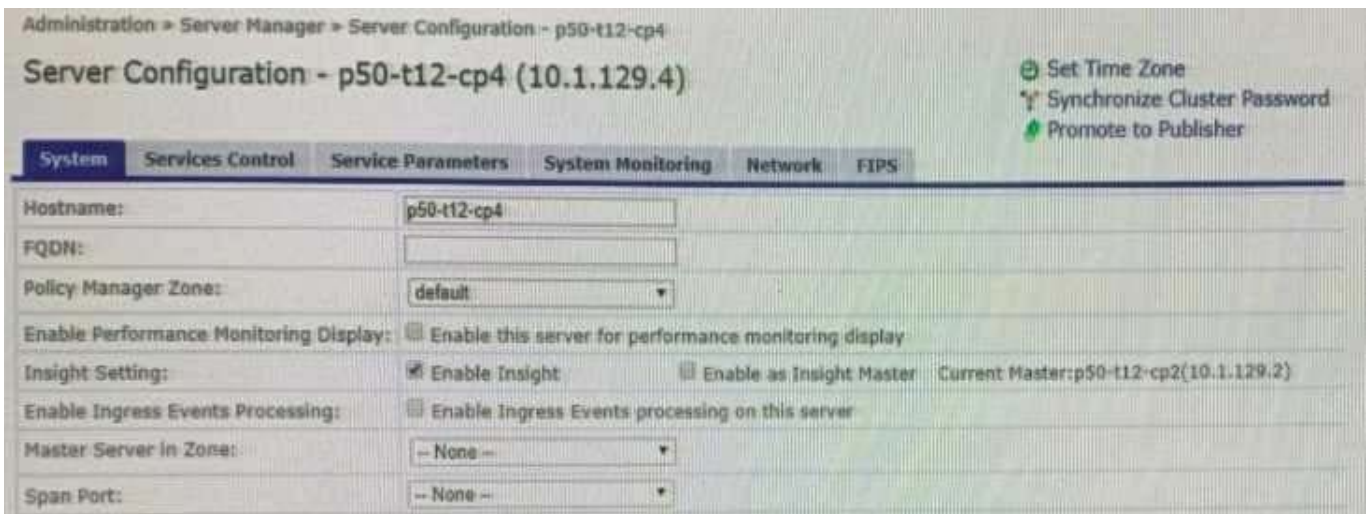

What is true about the Insight Master Server? (Select two)

- A. It is recommended to have an insight server for every zone to limit the traffic between sites.
- B. The Publisher is selected by default as Insight Master Server but it can be changed.
- C. There is no need to configure an insight Master Server when using default reports and alerts.
- D. An insight Master Server should be selected in order to configure reports and alerts.
- E. When enabling a server to be the insight Master any existing insight Master is overwritten.

Correct Answer: BD

QUESTION 3

A corporate ClearPass Cluster with two servers located at a single site, has both Management and Data port IP addresses configured. The Management port IPs are in the DataCenter networks subnet, while the Data port IPs are in the DMZ. What is the difference between using one Virtual IP for the AAA traffic versus sending AAA requests to the physical IPs for each server? (Select two.)

- A. The failover can be accomplished only by using Virtual IP.
- B. The Individual IPs can provide failover and load balancing.
- C. One Virtual IP can be used together with the individual server IPs for load balancing.
- D. By using the Virtual IP, the failover convergence is faster than using individual server IPs.
- E. Using the one Virtual IP can provide failover and load balancing.

Correct Answer: BE

QUESTION 4

Where is the following information stored in ClearPass?

- 1.
Roles and Posture for Connected Clients
 - 2.
System Health for OnGuard
 - 3.
Machine authentication State
 - 4.
CoA session info
 - 5.
Mapping of connected clients to NAS/NAD
- A. Multi-Master cache
 - B. Endpoint database
 - C. insight database
 - D. ClearPass system cache

Correct Answer: D

QUESTION 5

Under Onboard management and control, which option will deny the user from re-provisioning the device a second time?

- A. Revoke and Delete certificate
- B. Delete user
- C. Revoke certificate
- D. Delete certificate

Correct Answer: D

[HPE6-A81 Practice Test](#)

[HPE6-A81 Study Guide](#)

[HPE6-A81 Exam Questions](#)